makita®

JAPAN No.1

2022.04
GENERAL CATALOGUE

KATALOG PRODUK 综合产品目录



XGT X2 80Vmax

XGT 40Vmax Li-ion


makita
JAPAN No.1
Portable Cut-off
Recipro Saw
Rear Handle Saw
Power Cutter
Wall Scanner
Rotary Hammer
Slide Compound Miter Saw
Stapler
Combination Hammer
Angle Grinder
Pin Nailer
Concrete Vibrator
Circular Saw
Plunge Cut Saw
Wheelbarrow
Caulking Gun
Finish Nailer
Shear Wrench
Heat Gun
Vacuum Pump
Brad Nailer
Angle Drill
Rebar Tying Tool
Rivet Gun
Grease Gun
Inflator
Flashlight Radio
Area Worklight
Hole Puncher
LED Worklight
Fan
Flashlight
LED Flashlight
Worklight
Coffee Maker
Job Site Speaker
Job Site Radio
Heated Vest
Heated Blanket
Grass Shear
Fan Jacket
Heated Jacket
Lawn Mower
Cooler & Warmer Box
Blower
Fan Vest
Garden Sprayer
Robotic Cleaner
Trimmer
Chain Saw
Hedge Trimmer
Vacuum Cleaner
Drywall Saw
String Trimmer
Portable Vacuum Cleaner
Planer
Multi Function Power Head
Grass Trimmer
Belt Sander
Cut-Out Tool
Cleaner
Plate Joiner
Cyclone Cleaner
18V Lithium-ion
LXT
Teknologi Ekstrim Litium-ion
锂离子技术


18V
LITHIUM-ION
18V Litium-ion I 18V锂离子
Chain Saw
Pole Saw
Grass Trimmer
Pruning Shears
Earth Auger
Lawn Mower
Vacuum Cleaner
Blower
Portable Power Pack
High Pressure Washer
Vacuum Pump
Impact Wrench
Hedge Trimmer
Kettle
Screwdriver
Mixer
4 Mode Impact Driver
Backpack Vacuum Cleaner
Multi Function Power Head
Upright Cleaner
Auto Feed Screwdriver
Oil-Pulse Driver
Driver Drill
18V x2
Angle Drill
Angle Impact Wrench
Impact Driver
380+
TOOLS
Angle Impact Driver
Ratchet Wrench
Hammer Driver Drill
Rotary Hammer
6.0Ah 5.0Ah 4.0Ah
3.0Ah 2.0Ah 1.5Ah
Power Scraper
Combination Hammer
Compact Cut Off
Metal Shear
Steel Rod Cutter
Multi Tool
Metal Cutter
Nibbler
Recipro Saw
Die Grinder
Cutter
Threaded Rod Cutter
Circular Saw
Sander Polisher
Drywall Sander
Portable Band Saw
Random Orbit Polisher
Finishing Sander
Random Orbit Sander
Angle Grinder
Slide Compound Miter Saw
Compound Miter Saw
Jig Saw
Expand Your Lithium Line Up

INDEX Indeks 索引

CORDLESS Tanpa Kord 充电式 27 - 130

LED FLASHLIGHT Lampu Suluh LED LED照明灯 131 - 138

VACUUM CLEANER Pembersih Vakum 吸尘机 139 - 172

DRILLING | FASTENING Gerudi | Pengetat 钻孔 | 紧固 173 - 178

IMPACT DRILLING | DEMOLITION Gerudi | Pemecah 石工钻孔 | 凿壁加工 179 - 190

CUTTING Pemotong 切割 191 - 197

GRINDING | SANDING Pengisar | Pelicin 研削 | 研磨 198 - 217

SAWING Gergaji 锯切 218 - 225

PLANING | ROUTERING Pengetam | Tanggam 刨削 | 雕刻 226 - 229

OTHERS Lain-lain 其他 230 - 233

OUTDOOR POWER EQUIPMENT Alatan Kerja Luar 园林•户外 234 - 237

Makita 238 - 247

1

1805N 227
1911B 226

2

2012NB 227
2107F 195
2416S 196
2704 220
2712 221

3

3501N 227
3600H 229
3612BR 229
3709 228
3901 228

4

4100KB 192
4100NH 192
4100NH2Z 192
4100NH3Z 192
4107R 192
4112HS 191
4114S 191
4131 191
4190DW 119
4300BV 224
4327 224
4327M 224
4329 223
4350CT 223
4351CT 223
4403 229

5

5008MG 222
5016B 234
5103N 222
5402 223
5806B 222

6

6016 174
6271DWE 119
6305 173
6412 173
6413 173
6905B 177
6906 177
6922NB 178
6924N 178

9

9031 215
9035H 216
9045B 216
9215SB 210
9237C 210
9401 215
9404 214
9553HBG 198
9553HNG 198
9556HNG / HN / NB 199
9556HPG / PB 199
9557HNG / NBG 201
9557HPG 201
9558HNG / NBG 203
9558HPG 203
9563C 200
9565CR / PC 204
9903 215
9911 215
9924DB 215

A

ADP05 124
ADP06 125
ADP08 125
AF353 230
AF506 230
AF601 230
AF635 230
AS001GA105 / GZ03 NEW 36
AT638A 231

B

BBC231UZ | BC231UDWBE 120
BML360Z 120
BO3710 216
BO4510H 216
BO4556 217
BO4901 216
BO5031 217
BO5041 217
BO6050J 217
BUH550RD / Z | UH550DWB 120
BUH650RD / Z | UH650DWB 120
BUN490RD 120

C

CA5000X 197
CB100DB 130
CC300DW / DZ 116
CC301DWME / DWAE / DZ 110
CF100DZ 124
CF101DZ 123
CG100DZA 111
CL001GA127 / GA116 / GZ04 / GZ10 147
CL070DZ 152
CL100DW / DZ 151
CL102DW / DZ 151
CL104DWYX / DWY 152
CL105DW / DWX 152
CL106FDWYW / FDZW 150
CL107FDWYW / FDZW 151
CL108FDWYW / FDZW 150
CL111DWI / DWR 151
CL114FDWI 151
CL121DZ 150
CL183DZX 152
CP100DWA / DZ 109
CW001GZ NEW 40

D

DA001GZ NEW 29
DA3010F 174
DA332DWAE / DZ 108
DBO180Z 88
DBO380RTJ / Z NEW 88
DBS180Z 87
DCB200B 130
DCC500Z 81
DCE090Z 49
DCF102Z 123
DCF201Z 124
DCF203Z 123
DCG180RFE / RFEB / ZB / Z 96
DCL180FRFW / RFB / ZB / Z 149
DCL181FZWX 149
DCL182FRFW / FZW 149
DCL184Z 150
DCL280FZW / FZB / FZ 148
DCL281FZW / FZB / FZ 148
DCL282FZW / FZ 148
DCL500Z 144
DCL501Z 144
DCM501Z 125
DCO180Z 94
DCO181Z 94
DCS550RFE / Z 77
DCS551RFJ / Z 77
DCS552Z 76
DCS553Z 76
DCU180Z 103
DCV202YXL 130
DDA351Z 68
DDA450Z 68
DDA460ZK 45
DDF083RTE / RFE / Z 60
DDF453RME / RFE / SYE / Z 60
DDF458RME / RFE / Z 59
DDF459RME / Z 60
DDF481RTE / RME / RFE / Z 59
DDF482RME / RFE / Z 59
DDF483RTE / RME / RFE / Z 60
DDF484RTE / RME / RFE / Z 59
DDF485RFE / Z 59
DDF486RTE / Z 58
DDF487RAJ / Z 58
DDG460ZX7 56
DF001DW 118
DF001GD201 / GZ 28
DF002GD201 / GA201 / GZ 28
DF012DSE 117
DF0300 173
DF030DWE 115
DF031DSME / DWAE / DWYE / DZ 105
DF032DSME / DSAE / DZ 104
DF033DSME / DWAE / DZ 104
DF330DWE 115
DF331DSME / DZ 104
DF332DSME / DSAE / DZ 104
DF333DSME / DWAE / DWYE / DZ 104
DF488DWE 119
DFJ201ZM / ZL / ZXL 130
DFJ211ZM / ZL / ZXL 127
DFJ212ZM / ZL / ZXL 128
DFJ213ZM / ZL / ZXL 128
DFJ214ZM / ZL / ZXL 128
DFJ214OM / L / XL / 2XL 128
DFJ216ZL 127
DFJ300ZXL 129
DFJ311ZM / ZL / ZXL 127
DFJ400ZXL 129
DFJ411ZM / ZL / ZXL 127
DFJ416ZL 127
DFN350Z 95
DFR550Z 69

Double Insulation
Penebat Berganda | 双重绝源

Variable Speed
Kelajuan Boleh Ubah | 无段变速

Brake
Brek | 电子自动刹车

Reversing
Mengundur | 正逆转

Electronic Ignition
Penyalaan Elektronik | 电子式启动装置

Mechanical 2-Speed
2-kelajuan Mekanikal | 机器式双速

Electronic 2-Speed
2-kelajuan Elektronik | 电子式双速

Electronic 3-Speed
3-kelajuan Elektronik | 电子式三速

Electronic 4-Speed
4-kelajuan Elektronik | 电子式四速

Keyless Chuck
Chuck Pengetatan Diri | 自锁夹头

Torque Setting 6
Pelarasan Tork 6 | 6档扭力调整

Torque Setting 9
Pelarasan Tork 9 | 9档扭力调整

Torque Setting 16
Pelarasan Tork 16 | 16档扭力调整

Torque Setting 18
Pelarasan Tork 18 | 18档扭力调整

Torque Setting 20
Pelarasan Tork 20 | 20档扭力调整

DFS250RTE / RFE / Z 69
DFS251RTE / RFE / Z 69
DFS452Z 69
DFV210ZM / ZL / ZXL / Z2XL 129
DFV214A01 / A02 129
DG001GZ05 NEW 39
DGA402RFE / Z 84
DGA404RTE / RFE / Z 83
DGA405RFE / Z 84
DGA406RME / RFE / Z 83
DGA408RME / RFE / Z 83
DGA411Z 82
DGA414Z 83
DGA418Z 83
DGA419Z 82
DGA452RME / RFE / Z 84
DGA456RFE / Z 84
DGA458RFE / Z 84
DGA505RFE / Z 86
DGA508RFE / Z 86
DGA511Z 85
DGA514Z 86
DGA518Z 86
DGA519Z 85
DGA700Z 46
DGA701Z 46
DGA900Z 46
DGA901Z 46
DGD800Z 87
DGD801Z 87
DGP180RT / Z 93
DHK180Z 76
DHP453RME / RFE / SYE / Z 64
DHP458RME / RFE / Z 63
DHP459Z 64
DHP481RTE / RFE / Z 63
DHP482RME / RFE / Z 63
DHP483RME / RFE / Z 64
DHP484RME / RFE / Z 63
DHP485RFE / Z 63
DHP486RTE / Z NEW 62
DHP487RAJ / Z 62
DHR165RME / RFE / Z 76
DHR171RTE / RFE / Z 75
DHR182ZWJ 75
DHR202RME / RFE / Z 75
DHR241RFE / Z 75
DHR242RTE / RME / RFE / Z 75
DHR263PM4 / RF4 / Z 45
DHR280PT2J / Z 44
DHR282PT2J / Z 44
DHR400ZKN 44
DHS630RME / RFE / Z 90
DHS661RFJ / Z 89
DHS680RMJ / RFJ / Z 90
DHS710RM2J / RF2J 48
DHS782Z 47
DHS783Z 47
DHS900PT2 / Z 47
DHW080ZK 57
DJN161Z 78
DJR181RFE 91
DJR183Z 91
DJR186RME / RFE / Z 91
DJR187RME / RFE / Z 91
DJR188Z 91
DJR360RF4 / Z 46
DJS101Z 77
DJS130RFE / Z 77
DJS161Z 77
DJV180RFE / Z 92
DJV181RFE / Z 92
DJV182RME / RFE / Z 92
DKP180RFE / Z 93
DKP181RTJ / Z 93
DLM160Z 99
DLM330SM / Z NEW 99
DLM380Z 53
DLM382PT2 / CM2 / Z 53
DLM431PT2 / Z 53
DLM432PT2 / Z 52
DLM460Z 52
DLM480Z NEW 52
DLM532Z 52
DLM533Z 51
DLM539Z NEW 52
DLS111Z 47
DLS211Z 47
DLS600Z 89
DLS713RME / Z 89
DLS714PM2 / Z 47
DLW140Z 46
DML186 137
DML801 136
DML802 134
DML805 134
DML807 136
DML808 135
DML810 133
DML812 134
DML813 NEW 133
DML814 NEW 133
DML815 NEW 135
DML809 NEW 133
DML811 NEW 134
DML816X NEW 136
DMP180Z 96
DMP181Z NEW 96
DMR114 122
DMR203 122
DMR300 NEW 122
DP2010 173
DPB180Z 80
DPB182Z 80
DPB183Z 81
DPB184Z 81
DPJ180Z 92
DPO500Z 87
DPO600Z 87
DPP200ZK 79
DPT353Z 95
DPV300Z 87
DRC200Z 143
DRS780Z 48
DRT50Z / ZJX9 94
DRV150Z 78
DRV250Z 78
DS4012 174
DS5000 174
DSC102ZJ 79
DSC121ZK 79
DSC162Z 80
DSC163ZK 80
DSC191Z 80
DSC251ZK 80
DSD180Z 92
DSL800Z 88
DSL801Z 88
DSP600Z 48
DSP601Z 48
DSS501Z 90
DSS610Z 90
DST121ZK 95
DST221Z 95
DST421ZK 95
DTD149RFE / Z 67
DTD152RME / RFE / Z 67
DTD153RTE / RFE / Z 66
DTD154RME / RFE / Z 66
DTD155RME / Z 67
DTD156SF / Z 67
DTD157RAJ / Z 66
DTD170RME / RFE / Z 66
DTD171RTJ / RFJ / Z 66
DTL061Z 68
DTL062Z 118
DTL063Z 74
DTM50Z 89
DTM51RFEX8 / Z 89
DTM52RTJX1 / Z 88
DTP141RFE / Z 67
DTR180ZJ 78
DTS141RFE / Z 68
DTW152Z 118
DTW180Z 73
DTW181RFE / Z 73
DTW190RME / RFX2 / RFE / Z 73
DTW251RME / RFE / Z 73
DTW285RME / RFE / Z 72
DTW300RTJ / Z 72
DTW301RTJ / Z 72
DTW302RTJ / Z NEW 72
DTW450RME / RFE / Z 72
DTW700RTJ / Z 71
DTW701RTJ / Z 71
DTW800RMJ / RFJ / Z 71
DTW1001RTJ / RMJ / RFJ / Z 71
DTW1002RTJ / RMJ / RFJ / Z 71
DUA300ZB 54
DUA301ZB 53
DUB182Z 102
DUB183Z 102
DUB184RT / Z 101
DUB185Z 102
DUB186Z 102
DUB361Z 56
DUB362RT2 / RM2 / Z 55
DUB363ZV 55
DUC122Z 101
DUC252PM4 / Z 55
DUC254Z 101
DUC353Z 54
DUC355Z 54
DUC356Z 54
DUC406Z 54
DUH523RME / RFE / Z 100
DUH601Z 99
DUH651Z 55
DUH754SRT / SZ 99
DUM111SYX 101
DUM168Z 101
DUM604Z 100
DUN461WZ NEW 100
DUN500WZ 100
DUN600LZ 100
DUP361Z 51
DUP362ZN 50
DUR181Z 98
DUR182LRF / LZ 98
DUR184LZ 98
DUR187LRFE / LZ 98
DUR188LRFE / LZ 97
DUR188URFE 98
DUR189Z 97
DUR190LRT2 / LZX2 97
DUR191LRT2 / LZX2 97

Torque Setting 21
Pelarasan Tork 21 | 21档扭力调整

SDS-PLUS Shank
Batang SDS-PLUS | 四坑柄

SDS-MAX Shank
Batang SDS-MAX | 五坑柄

17mm Hex Shank
Batang Heksagon 17mm | 17mm六角柄

30mm Hex Shank
Batang Heksagon 30mm | 30mm六角柄

21mm Hex Shank
Batang Heksagon 21mm | 21mm六角柄

28.6mm Hex Shank
Batang Heksagon 28.6mm | 28.6mm六角柄

Torque Limiter
Pengehad Tork | 扭力限制器（安全离合器）

Constant Speed
Kelajuan Tetap | 电子定速

Soft Start
Penghidupan Secara Perlahan | 缓速起动

Bevel Cutting L45 R5
Pemotongan Serong Kiri 45° Kanan 5° | 斜角切割(左45°/右5°)

Bevel Cutting 45 left
Pemotongan Serong Kiri 45° | 斜角切割(左45°)

Bevel Cutting 45 LR
Pemotongan Serong Kiri Kanan 45° | 斜角切割(左右各45°)

Orbital Cutting
Pemotongan Orbit | 轨道切割

Makita Shank Jig Saw Blade
Bilah Gergaji Ukir Makita | M型式锯片

DUR192LST/ LZ 97
DUR364LPM4 / LRM2 / LZ 50
DUR368APT2 / AZ 50
DUR368LPT2 / LZ 50
DUR369LZ 50
DUS054Z NEW 103
DUT130RFE / Z 76
DUT131Z 76
DUX18RGX4 / Z 99
DUX60ZM3 / Z 51
DVC150LZ 140
DVC151LZ 140
DVC152LZ 140
DVC153LZ 140
DVC154LZ / LZX 140
DVC155LZX3 141
DVC157LZX5 141
DVC260Z / ZX 143
DVC261Z 143
DVC265ZX 143
DVC350Z 149
DVC560Z 144
DVC660Z 142
DVC665Z 142
DVC750LZ / LZX1 149
DVC860LZ 141
DVC862LPT2 / LRT2 / LZ 141
DVC863LPT2 / LRT2 / LZ 141
DVC864LZ 142
DVC865LZX3 142
DVC867LZX1 142
DVF154Z 102
DVP180Z 94
DVR450Z 96
DWR180Z 74
DWT310ZK 45

E

ELM3320 235
ELM3711X 235
ELM3720 235
ELM4121 235

F

FJ203DZL / DZLL 129
FJ301DZM / DZL / DZLL 129
FJ401DZL / DZLL / DZ3L 129
FJ502DZM / ZL / ZLL 128
FN001GD101 / GZ 35
FS2300 175
FS2500 176
FS2700 176
FS4200 176
FS6300 176

G

GA003GM201 / GD201 / GZ 31
GA005GM201 / GD201 / GZ 32
GA011GM201 / GD201 / GZ 31
GA013GM201 / GD201 / GZ 32
GA021GM201 / GD201 / GZ 31
GA023GM201 / GD201 / GZ 32
GA027GM201 / GD201 / GZ 32
GA029GM201 / GD201 / GZ 32
GA035GZ 33
GA036GZ 33
GA037GT201 / GM201 / GZ 33
GA038GT201 / GM201 / GZ 33
GA4030 199
GA4030R 198
GA4031 199
GA4034 199
GA4040 200
GA4040C 200
GA4041C 200
GA4051R 200
GA4530 201
GA4530R 201
GA4540 202
GA4540R 202
GA4541C 202
GA5010 204
GA5020 203
GA5030 202
GA5030R 203
GA5034 203
GA5040 204
GA5041C 204
GA5080R 204
GA6010 205
GA6020C 205
GA6040 205
GA7020 207
GA7040R 207
GA7050 206
GA7060 207
GA7060R 206
GA7061R 206
GA7062 206
GA7063R 206
GA7070 NEW 207
GA9020 208
GA9050 208
GA9060 208
GA9060R 208
GA9061R 208
GA9070 NEW 209
GB602 213
GB801 213
GD0600 211
GD0601 211
GD0603 212
GD0800C 212
GD0801C 212
GD0811C 212
GS5000 212
GS6000 213
GV5010 210
GV6010 210
GV7000C 210

H

HB350 NEW 178
HB500 178
HG5030K 232
HG6031VK 232
HG6530VK 231
HK1820 188
HM001GM202 / GZ 27
HM002GZ03 27
HM0810TA 185
HM0870C 186
HM0871C 186
HM1201 186
HM1203C 186
HM1213C 186
HM1214C 187
HM1306 187
HM1307C 187
HM1317C 187
HM1501 187
HM1511 188
HM1810 188
HM1812 188
HP001GD201 / GZ 29
HP002GD201 / GA201 / GZ 29
HP0300 179
HP1230 179
HP1630 179
HP2050 180
HP330DWE 115
HP331DSME / DWAE / DWYE 105
HP332DSME / DSAE / DZ 105
HP333DSME / DWAE / DWYE / DWY / DZ 105
HP488DWE 119
HR001GM201 27
HR002GM201 28
HR003GM201 / GZ 28
HR005GM201 / GZ 27
HR006GZ 27
HR007GM201 / GZ NEW 28
HR140DWYE1 108
HR166DSMJ / DWAJ / DZ 108
HR1830 180
HR1840 180
HR1841F 180
HR2020 180
HR2320T / X2 181
HR2470X5 181
HR2611FT 181
HR2630X3 181
HR2631FTX2 181
HR2652 182
HR2810 182
HR3001CJ 182
HR3011FCJ 182
HR3200C 183
HR3210C 183
HR3530 183
HR4001C 183
HR4002 183
HR4003C 184
HR4013C 184
HR4030C 184
HR4501C 184
HR4511C 184
HR5202C 185
HR5211C 185
HR5212C 185
HS004GM201 / GZ 35
HS009GT201 / GZ NEW 35
HS0600 222
HS100 233
HS300DW 116
HS301DSME / DWAE / DZ 110
HS6100 221
HS6600 221
HS7010 221
HS7600 221
HW102 237
HW121 237
HW1200 237
HW1300 237

J

JN1601 196
JN3201 196
JR001GM201 / GZ 35
JR100DWE 117
JR102DWE 117
JR105DWAE / DZ 111
JR3050T 224
JR3051TK 225
JR3061T 225
JR3070CT 225
JS1300 197
JS1601 197
JS1602 197
JS3201 197
JV0600K 224
JV100DWE 116
JV101DWAE / DWYE / DZ 110
JV102DZ 111
JV103DSMJ / DWAJ / DZ 111

K

KP0800X 226
KP0810 226

L

LB1200F 225

Bayonet Shank Jig Saw Blade
Bilah Gergaji Ukir Jenis Bayonet | B型曲线锯锯片

Laser Marker
Penanda Laser | 雷射标志

Hook & Loop
Strap Velco | 魔术贴式

Depth Adjustment
Pelarasan Kedalaman | 深度调整

Anti Vibration
Anti Getaran | 防震

Automatic Oiling
Fungsi Pelinciran Automatik | 自动润滑功能

Chain Brake
Brek Rantai | 链条刹车

Primer Pump
Pam Utama | 按压吸油

Capacitor Discharge Ignition
Pencucuhan Nyahcas Kapasitor | 电容放电式点火

Decompression Valve
Injap Penyahmampatan | 减压阀

Auto Decompression
Penyahmampatan Automatik | 自动减压

Rapid Start
Penghidupan Cepat | 快速启动

LC1230 193
LD030P 232
LD050P 233
LD080P / LD080PI 233
LF1000 220
LH1201FL 219
LM001CZ 42
LM002JM101 NEW 43
LS002GZ 34
LS003GZ NEW 34
LS004GZ NEW 34
LS0714 219
LS1018L 218
LS1019L 218
LS1030N 220
LS1040 218
LS1219L 218
LS1440 220
LW1400 195
LW1401 195
M
ML001G NEW 134
ML002G NEW 135
ML003G NEW 133
ML006GX NEW 136
ML101 137
ML103 137
ML104 136
ML105 135
ML106 135
MLT100 220
MP001GZ NEW 36
MP100DZ 113
N
N1900B 226
N5900B 222
P
PC5000C 214
PC5001C 214
PC5010C 214
PJ7000 227
PK5001C 209
PO5000C 211
PO6000C 211
PT354DZ 111
PV301DZ 110
PV7000C 211
PW5001C 214
R
RP0900 228
RP1801 229
RP1803 NEW 229
RP2301FC 228
RT0700C / X2 228
S
SA5040C 209
SC103DZJ 109
SD100DWAJ / DZ 110
SG1251J 191
SJ401 225
SK10GD NEW 114
SK104Z 232
SK105DZ 114
SK105GDZ 114
SK106DZ 114
SK106GDZ 114
SK20GD NEW 114
SK209GDZ 114
SK312GDZ 114
SK40GD NEW 114
SK700D NEW 114
SK700GD NEW 114
SP001GZ02 NEW 33
SP6000J 223
T
TD001GD201 / GZ 30
TD0100 175
TD0101F 175
TD020DSW 117
TD022DSE 117
TD090DWE 115
TD091DWE 116
TD110DSME / DWAE / DWYE / DZ 106
TD111DSME / DWAE / DWYE / DZ 106
TL064DSME / DWAE / DZ 108
TL065DSME / DWAE / DZ 108
TM30DWAE / DWAEX1 / DZ 109
TM3000C 213
TM3010CX6 213
TW001GM201 / GZ 30
TW005GD201 / GZ 30
TW007GM204 / GD202 / GZ02 NEW 30
TW008GZ NEW 30
TW0200 178
TW0350 177
TW060DZ 107
TW100DWE 116
TW140DZ 107
TW141DSME / DWAE / DZ 106
TW160DZ 106
TW161DSME / DWAE / DZ 106
TW1000 177
U
UA003GM102 / GZ01 NEW 38
UA004GM102 / GZ01 NEW 38
UB001CZ 42
UB001GM101 / GZ 40
UB100DZ 113
UB101DZ 113
UB1103 233
UC004GM101 / GZ NEW 37
UC3541A 234
UC3551A 234
UC4041A 234
UC4051A 234
UH004GM201 / GZ 39
UH006GM201 / GZ 39
UH014GM101 / GZ NEW 40
UH201DWAX / DZ 112
UH353DWA / DZ 112
UH7580X 234
UM110DWYX 119
UM600DWA / DZ 112
UN460WDZ NEW 112
UR003GZ 37
UR007GM101 / GZ01 NEW 37
UR008GM101 / GZ01 NEW 37
UR012GZ02 NEW 37
UR100DSME / DZ 112
UR201CZ 42
US053DZ NEW 113
UT1305 176
UT2204 177
UX01GZ 38
V
VC1310LX1 160
VC2000L 160
VC2211M 159
VC2510L 160
VC3210L 160
VC3211M 159
W
WR100DWA / DZ 107
M0400G / M0400B 244
M0600G / M0600B 238
M0801G / M0801B 239
M0900G / M0900B 240
M0910G / M0910B 240
M1100G / M1100B 245
M1901G / M1901B 245
M1902G / M1902B 245
M2300G / M2300B 243
M2401G / M2401B 244
M2403B NEW 245
M3600G / M3600B 246
M3601G / M3601B 246
M3602B NEW 246
M3700G / M3700B 246
M3701G / M3701B 247
M3702B NEW 247
M4000G / M4000B 247
M4001G / M4001B 247
M4100G / M4100B 244
M4301G / M4301B 244
M4302G / M4302B 243
M4501G / M4501B 244
M5801G / M5801B 243
M6001G / M6001B 238
M6200G / M6200B 238
M6501G / M6501B 238
M6600XG / M6600XB 238
M8100G / M8100B 239
M8103G / M8103B 239
M8600G / M8600B 240
M8700G / M8700B 239
M8701X3G / M8701X3B 239
M9000G / M9000B 242
M9001G / M9001B 242
M9002G / M9002B 241
M9200G / M9200B 243
M9201G / M9201B 243
M9202G / M9202B 242
M9204G / M9204B 242
M9400G / M9400B 242
M9503G / M9503B 241
M9504G 241
M9506G / M9506B 240
M9508G / M9508B 241
M9509G / M9509B 240
M9511G / M9511B 241
M9512G / M9512B 240
M9513G / M9513B 240
M9800G / M9800B 246

Stainless Tank
Tangki Tahan Karat | 不锈钢箱体

Revolving Hose
Hos Pusingan | 旋转软管

Static Free Hose
Hos Bebas Statik | 无静电胶管

Dust Collecting
Pengumpulan Habuk | 吸尘器连接

Built-in Job Light
Lampu Kerja Terbina | 内置工作灯

Wooden Carrying Case
Kotak Peralatan Kayu | 木制携带箱

Carrying Case
Kotak Peralatan | 携带箱

Sequential or Bump-fire
Sentakan Tunggal atau Berangkai | 连发模式

Auto Firing Stop
Nyalaan Terhenti Secara Auto | 自动停止发射

Clutch-equipped
Pelarasan tork | 扭力调整值

40Vmax Li-ion XGT

Tool ◂▸ Battery ◂▸ Battery Charger
Digital communication

Alat Kuasa ◂▸ Bateri ◂▸ Pengecas Bateri
Komunikasi digital

工具◂▸电池◂▸充电器
数码通讯

XGT is a new system with its own tools, batteries, and chargers. A combination of innovative tool design and higher output batteries provide a genuine solution for high demand industrial users.

XGT adalah sistem baru dengan alat, bateri dan pengecas yang unik.
Kombinasi reka bentuk alat inovatif dengan bateri output tinggi memberikan penyelesaian bagi pengguna industri permintaan tinggi.
采用全新的XGT智能充电供电系统，具有独特的工具、电池和充电器。
创新的工具设计和高输出的电池相结合，为高需求的工业用户提供了真正的解决方案。



Optimum power supply system and Optimum charging system

The XGT range of tools and batteries come with a built-in program, providing digital communication between the battery and tool. Allowing not only for the battery to talk with tool but also the tool to talk to the battery. Battery technology and motor engineering that work together for optimum performance.

Sistem Bekalan Kuasa dan Pengecasan Pintar XGT
Bateri alat kuasa siri XGT mempunyai program terpasang untuk mewujudkan komunikasi dua hala antara bateri dan alat kuasa. Prestasi yang optimum dicapai dengan komunikasi antara teknologi bateri dan kejuruteraan motor yang berfungsi bersama
XGT智能充电供电系统
XGT系列产品工具的电池都有一个内置程序，实现电池与工具之间双向的通信，使电池和电机达到理想的性能。

Optimum charging system

Auto maintenance system with two cooling fans for providing more optimum fast charging

Sistem pengecasan pintar
Pengecas mempunyai sistem penyelenggaraan automatik dan mempunyai dua kipas penyejuk
智能充电系统
充电器具有自动维护系统，
并且拥有两个冷却风扇

Built Tough

High durability specifications specially designed for 40Vmax Li-ion batteries

Spesifikasi ketahanan tinggi direka khas untuk bateri Li-ion 40Vmax
专为 40Vmax 锂电池设计的高耐用性结构




4-LED fuel gauge indicator

Penunjuk tahap bateri
电池电量计指示灯



Shock absorption structure

Struktur penyerapan kejutan
减震结构

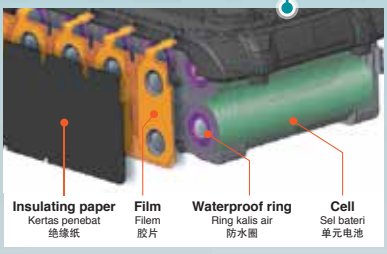

Waterproof Triple-layer Structure

prevents cell failure due to water and dust

Struktur kalis air tiga lapisan
Mencegah kerosakan bateri akibat air dan habuk
三层防水结构
防止因水和灰尘引起的电池故障



Terminal short-circuit prevention structure

The protection wall is provided between terminals against water and dust

Struktur pencegahan litar pintas terminal
Terdapat dinding pelindung kalis air dan tahan debu di antara terminal
端子防短路结构
端子之间设有防水防尘保护墙



High Rigidity Battery Rails

Durable slide in battery rail that holds the battery and the tools firmly and securely to withstand high power products

Slaid bateri berkekuatan tinggi
Slaid tahan lama di rel bateri untuk pegangan bateri dan alat kuasa dengan kukuh, sesuai untuk kerja yang berbeban tinggi
高强度电池滑轨
耐用的滑动式滑轨，可牢固地连接电池和工具，更适合高负荷的工作


OPTIMUM CHARGING SYSTEM

Sistem Pengecasan Terbaik 智能充电系统

18V LITHIUM-ION
18V Litium-ion
18V锂离子

LXT
Teknologi Ekstrim Litium-ion
锂离子技术

- **It is necessary to cool down before start charging when the battery temperature is high**
  Bateri yang baru diguna bersuhu tinggi, ia perlu didinginkan sebelum pengecasan bermula
  刚使用完的电池处于高温状态，要冷却后才能开始充电
- **Built-in fan circulates air through the battery before start charging and during the charging process to cool the battery for faster charge time**
  Kipas akan terus menyejukkan bateri semasa pengecasan untuk mencapai pengecasan cepat
  开始充电后，风扇会持续冷却电池，令充电时间更短

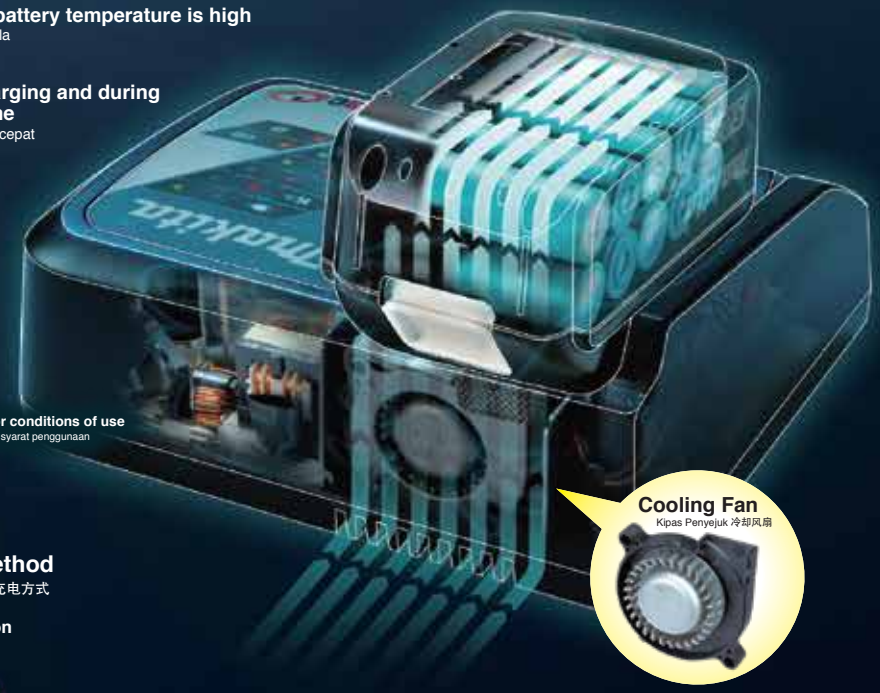

Cooling Fan
Kipas Penyejuk 冷却风扇

FAST CHARGING
Pengecasan Cepat 快速充电

22 MINUTES
to fully charge a 3.0Ah slide Li-ion battery

***Charge time may vary depending on battery model or conditions of use**
Masa pengecasan mungkin berbeza bergantung kepada model bateri atau syarat penggunaan
充电时间可能因电池型号或使用条件而异

Makita

Optimum charging system
Sistem Pengecasan Terbaik 智能充电系统


Forced air cooling



Fast charging



Optimum charging system
Sistem Pengecasan Terbaik 智能充电系统



Competitor

General charging method
Kaedah Pengecasan Umum 一般充电方式


Natural heat dissipation




Waiting time for charging



General charging method
Kaedah Pengecasan Umum 一般充电方式



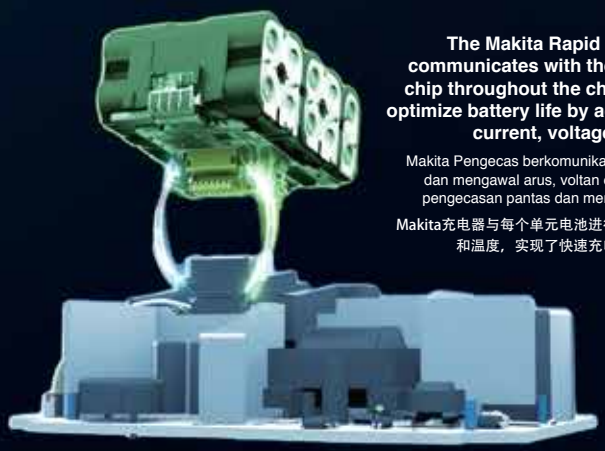

The Makita Rapid Optimum Charger communicates with the battery's built-in chip throughout the charging process to optimize battery life by actively controlling current, voltage and temperature

Makita Pengecas berkomunikasi dengan setiap sel unit dan mengawal arus, voltan dan suhu, membolehkan pengecasan pantas dan memanjangkan hayat bateri

Makita充电器与每个单元电池进行通信并控制电流，电压和温度，实现了快速充电，且延长电池使用寿命

BATTERY PROTECTION FUNCTION

Fungsi Perlindungan Bateri 电池保护功能

Shock Absorbing
Tahan getaran 坚固耐震

Heavy Duty Pack
Pembungkusan tugas berat
重型包装



Built-In-CPU
CPU dibina dalam 内置CPU

OVER DISCHARGING
Pelepasan berlebihan
过度放电


OVERLOAD
Penggunaan berlebihan
超越负荷

HIGH TEMPERATURE STATE
Bersuhu tinggi
高温状态

OVER CHARGING
Pengecasan berlebihan
过度充电

Anytime Charge
Caj pada bila-bila masa 随时充电

- **No Memory Effect**
  Tiada Kesan Memori 不受记忆影响
- **No Discharging Required**
  Tiada pelepasan diperlukan 不需要放电

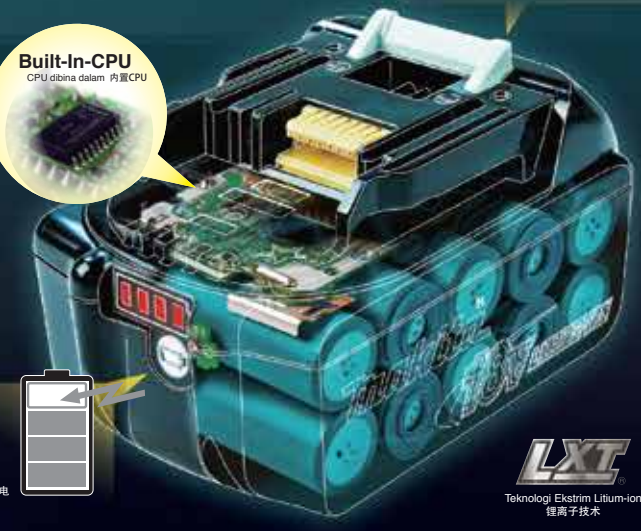

LXT
Teknologi Ekstrim Litium-ion
锂离子技术

makita

JAPAN No.1

VIDEO CLIP
12Vmax
Models and specs may vary by country



12Vmax LITHIUM-ION
12V Litium-ion
12V锂离子

CXT®
Teknologi Ekstrim Kompak
紧凑极限技术

OPTIMUM CHARGING SYSTEM

Sistem Pengecasan Terbaik 智能充电系统

FAST CHARGING
Pengecasan Cepat 快速充电

22 MINUTES
to fully charge a 1.5Ah slide Li-ion battery

*Charge time may vary depending on battery model or conditions of use
Masa pengecasan mungkin berbeza bergantung kepada model bateri atau syarat penggunaan
充电时间可能因电池型号或使用条件而异



LI-ION BATTERY

Sistem bateri Li-ion 锂电池系统

Multi-Contact Slide-type Terminal

Terminal slaid dengan pelbagai sambungan
多触点滑动式终端

- **Ensures stable contact with tool even under extreme vibration**
- **Allows tools to be equipped with an ergonomic handle design**
- Memastikan sambungan yang stabil dengan alat walaupun di bawah getaran yang melampau
- Membolehkan alat dilengkapi dengan reka bentuk pemegang ergonomik
- 即使在极端的振动下也能确保与工具的稳定连接
- 允许工具配备符合人体工程学的手柄设计



Battery fuel gauge

Penunjuk Tahap Bateri 电量显示

The power remaining in the battery can be indicated in 4 stages simply by pushing a button


Menekan butang untuk penunjuk tahap bateri

只需按一下按钮，电池中剩余的电量就可以分四个阶段显示出来




Charging status indicator

Penunjuk Status Mengecas 充电状态显示灯



shows the charging status of a battery being charged in 2 stages: less than 80% and 80% or more.



BATTERY & CHARGER TIME REFERENCE, COMPATIBILITY CHART

Panduan tempoh pengecasan dan bateri 电池充电时间参考表，兼容性图表

XGT 40V max Li-ion

	5.0Ah BL4050F (-)	4.0Ah BL4040 (191B26-6)	2.5Ah BL4025 (191B36-3)	2.0Ah BL4020 (191L29-0)
Fast Charger DC40RA (191E08-6) Pengecas Pantas 快速充电器 Two Port Multi Fast Charger DC40RB (191N14-5) Pengecas Pantas Dua Port 两端快速充电器	50 min. Fast Charging	45 min. Fast Charging	28 min. Fast Charging	22 min. Fast Charging
Standard Charger DC40RC (191M92-9) Pengecas Standard 标准充电器	85 min.	67 min.	38 min.	30 min.

18V LITHIUM-ION

Fast Charger DC40RA (191E08-6) Pengecas Pantas 快速充电器 + Adapter ADP10 (191C11-5)

Two Port Multi Rapid Charger DC18RD (196934-4) (630869-4) Pengecas Pantas Dua Port 两端快速充电器

Rapid Charger DC18RC (195586-8) Pengecas Pantas 快速充电器

Dual Port Fast Charger DC18RE (198446-3) Pengecas Pantas Dua Port 两端快速充电器

Standard Charger DC18SD (194534-4) Pengecas Standard 标准充电器

Automotive Charger DC18SE (194618-8) Pengecas Automotif 汽车充电器

6.0Ah BL1860B (197422-4)	40 min.	55 min. Fast Charging		130 min.
5.0Ah BL1850B (197282-4)	40 min.	45 min. Fast Charging		110 min.
4.0Ah BL1840B (197265-4) (197267-0)	29 min.	36 min. Fast Charging		90 min.
3.0Ah BL1830B (197599-5)	22 min.	22 min. Fast Charging		60 min.
2.0Ah BL1820B (197256-5)	24 min.	24 min. Fast Charging		45 min.
1.5Ah BL1815N (196235-0)	15 min.	15 min. Fast Charging		30 min.
1.3Ah BL1815 (194513-2)	15 min.	15 min. Fast Charging		30 min.

12Vmax LITHIUM-ION

Speed Charger DC10SB (197346-4) Pengecas Pantas 快速充电器

Dual Port Fast Charger DC18RE (198446-3) Pengecas Pantas Dua Port 两端快速充电器

Standard Charger DC10WD (197450-9) Pengecas Standard 标准充电器

4.0Ah BL1041B (197406-2)	60 min. Fast Charging	130 min.	
2.0Ah BL1021B (197396-9)	30 min. Fast Charging	70 min.	
1.5Ah BL1016 (197393-5)	22 min. Fast Charging	50 min.	

10.8V LITHIUM-ION

7.2V LITHIUM-ION

Standard Charger DC10WA (194589-9) Pengecas Standard 标准充电器

1.3Ah BL1013 (194550-6) (196066-7)	1.0Ah BL7010 (194355-4)	50 min. BL1013 / 30 min. BL7010

18V G-Battery

Standard Charger DC18WA (195424-4) Pengecas Standard 标准充电器

1.5Ah BL1815G (198186-3) — 70 min.

14.4V Ni-MH	12V Ni-MH	9.6V Ni-MH	Standard Charger DC18SD (194534-4)	Automotive Charger DC18SE (194618-8)
3.1Ah BH1433 (193354-3)	3.1Ah BH1233C (193930-3)	3.1Ah BH9033A (193591-9)	70 min.	70 min.
1.8Ah BH1420 (193351-9)	1.8Ah BH1220C (193928-0)	1.8Ah BH9020 (193631-3)	40 min.	40 min.

12V Ni-CD	9.6V Ni-CD	Standard Charger DC1414 (193865-8)
1.9Ah 1222 (192597-4)	—	45 min.
1.3Ah PA12 (193981-6); 1.3Ah 1220 (192681-5)	1.3Ah PA09 (193977-7); 1.3Ah 9120 (192638-6); 1.3Ah 9100 (192019-4)	30 min.


14.4V Ni-MH	12V Ni-MH	9.6V Ni-MH	Standard Charger DC1414 (193865-8)
2.8Ah 1435 (193060-0)	2.8Ah 1235 (193059-5)	2.8Ah 9135 (193058-7)	70 min.

9.6V Ni-CD	7.2V Ni-CD	Standard Charger DC1414 (193865-8)
1.3Ah 9000 (191681-2)	1.3Ah 7000 (191679-9)	30 min.

Built-in Lithium-ion Battery 10.8V **Model:** CL111D | CL105D | CL104D **Charging Time (approx):** 180 min — 3.6V **Model:** DF001D **Charging Time (approx):** 180 - 300 min

BATTERY INFORMATION

Maklumat Bateri 关于电池的资讯

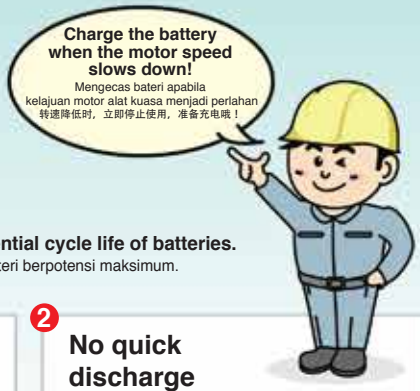

How to Keep Your Batteries at Their Best

Cara menggunakan prestasi bateri yang terbaik 如何使用才能发挥电池的最佳效能

Note the precautions below for keeping your batteries (Ni-Cd, Ni-MH, Li-ion) at their best to obtain maximum potential cycle life of batteries.

Perhatikan langkah penjagaan bateri berikut untuk memastikan bateri anda (Ni-Cd, Ni-MH, Li-ion) berada pada tahap terbaik untuk jangka hayat bateri berpotensi maksimum.

关于电池（镍镉、镍氢、锂电池）的最佳使用方法请参照下面的注意项目。电池将可得到最大的使用寿命。

1 No over-discharge

Stop using a tool and charge the battery when the tool power goes down or its motor speed slows down. Do not use a cordless tool when its power goes down. Otherwise, it will cause an imbalance of battery cells and reduction of battery cycle life.

Elakkan pelepasan berlebihan. Jika alat kuasa anda daya lemah (pengurangan kelajuan putaran motor) semasa penggunaan, berhenti menggunakannya dengan segera dan mengecaskan bateri (bateri dapat diisi semasa suhu turun ke suhu bilik). Dilarang terus menggunakan alat kuasa apabila kekuatannya semakin lemah kerana ketidakseimbangan sel bateri akan mengurangkan jangka hayat bateri.

避免过度放电在使用工具中如果感觉到力道减弱(马达的回转速降低)时，须马上停止使用且稍后(电池温度降至室温即可充电)进行充电。

严禁工具的力道减弱时还继续的使用。会因为元件容量的不均而导致电池寿命的短缺。

2 No quick discharge

Avoid overloading during tool operation that causes quick discharge.

Elakkan beban berlebihan semasa operasi alat kuasa yang akan menyebabkan pelepasan cepat.

避免急速放电使用时请注意避免有过负载现象发生。

3 No over-charge

Recharging a fully charged battery is called “Over-charge”. This will cause reduction of battery cycle life.

Elakkan pengecasan berlebihan. Mengecas semula bateri yang dicas penuh disebut "Over-charge". Ini akan mengurangkan jangka hayat bateri.

避免过度充电，充电后满电状态又再次作充电动作。这称作为[过充电]。是导致电池寿命降低的原因。

If a fully charged battery is about to be charged, Makita automatic maintenance function will stop recharging immediately to prevent battery deterioration.

Sekiranya bateri yang penuh dicas semula, fungsi penyelenggaraan automatik akan diaktifkan untuk menghentikan tindakan pengecasan untuk mengelakkan kerosakan bateri.

牧田滑动式电池对于充满电后又再次作充电时，自动保养机能会启动，将充电动作停止，防止电池的劣化产生。

4 Charge your batteries at an ambient temperature from 10°C to 40°C

Do not charge batteries cold from storage at a low ambient temperature below 10°C, or they are damaged. Also batteries are damaged at a high ambient temperature above 40°C. as the deterioration of battery cell materials are hastened by such a high temperature. Therefore, optimum air temperature for charging of batteries is from 10°C to 40°C. When you recharge a battery hot from operation of tool, do not leave it in the tool, but set it on the Makita charger for slide style batteries that will cool down the hot battery fast and efficiently with its forced air cooling system before recharging. This unique system will surely protect batteries from deterioration from heat.

Mengecas bateri yang disimpan pada suhu persekitaran antara 10 °C hingga 40 °C. Pengecasan bateri yang disimpan pada suhu persekitaran rendah (di bawah 10 °C) akan menyebabkan kerosakan bateri. Pengecasan bateri yang disimpan pada suhu persekitaran tinggi (melebihi 40 °C), kemerosotan bahan dalaman bateri akan dipercepat dan menyebabkan kerosakan bateri. Keluarkan bateri yang panas dari alat kuasa selepas penggunaan dan letakkan bateri pada pengecas. Pengecas Makita akan menyejukkan bateri panas dengan cepat dan cekap dengan sistem penyejukan sebelum mengecas semula. Sistem yang unik ini melindungi bateri daripada kerosakan akibat panas.

在10℃以下的低温环境中保管的电池如果进行充电，将对电池的本身造成伤害。另外，在40℃以上的高温环境下，会加速电池内部材料的劣化，也会对电池的本身造成伤害。在10℃～40℃的温度内充电是最合适的。刚使用完且还有些发热状态的电池，不要插在电动工具上。需移置到充电器。充电器的冷却装置会很有效率的将电池散热后再进行充电，如此，可以防止发热导致电池劣化的情形发生。

5 Keep your batteries away from moisture

High humidity and extreme temperature swings cause dew drop, and it will cause rust and short-circuit.

Elakkan bateri dari wap air. Kelembapan tinggi dan perubahan suhu yang melampau akan menyebabkan karat dan litar pintas.

不要触碰水气，生锈是短路的原因，高温，极端的温度差会导致结露现象产生。

6 Do not exert any significant impact on batteries

String impact on battery will cause internal wire breakage or cracks on battery housing.

Elakkan hentakan ketara yang akan menyebabkan kerosakan wayar dalaman atau keretakan pada penutup bateri.

不要强烈撞击，外壳的破损，是内部断线的原因。

Battery Care & Storage

Penjagaan & simpanan bateri 电池的保管方法

Store batteries at an ambient temperature below 35°C. Avoid storing batteries at a high air temperature and humidity

Simpan bateri pada suhu persekitaran di bawah 35°C, elakkan menyimpan bateri pada suhu dan kelembapan udara yang tinggi 将电池存放在低于 35°C 的环境温度下，避免将电池存放在空气温度高和湿度高的地方

Storage in fully charged condition			Storage in fully discharged condition	
Jenis bateri yang mesti disimpan dalam keadaan terisi penuh 须在充满电状态下保管的电池种类			Jenis bateri yang mesti disimpan dalam keadaan habis 须在放电状态下保管的电池种类	
	Li-ion Battery Bateri Li-ion 锂电池	**※Ni-MH Battery** Bateri Ni-MH 镍氢电池		**Ni-CD Battery** Bateri Ni-CD 镍镉电池

※ **Ni-MH batteries have to be charged once a year due to its self-discharging nature.**

※ **Ni-CD batteries have to be fully discharged before storage. After storage for sometimes, ensure Ni-CD batteries are fully charged before use.**

Non-Genuine "Counterfeit" Makita Li-Ion Batteries

CAUTION: Makita Corporation notifies tool users of the disadvantages and risks of using non-genuine "Counterfeit" Makita Li-Ion batteries.

Using non-genuine "Counterfeit" Makita batteries will result in:

- **Voiding the Makita Warranty for the Makita tool and the charger**
- **Voiding your country's standards approval of the tool**

When using non-genuine "Counterfeit" Makita Li-Ion batteries, there is also a risk of:

- The battery explosion that may result in personal injury and/or property damage
- Possible fire damage to the tool, the battery and/or the charger
- Unknown tool performance

Makita bears no liability for accidents, personal injury or property damage (or damage to batteries, tools or chargers) that occurs as a result of the use of non-genuine "counterfeit" batteries.

Makita only approves the use of genuine parts and accessories with Makita tools.
Makita does not approve the use of non-genuine or "counterfeit" batteries which are marketed and sold by third parties for use in Makita Li-Ion cordless tools.

Be sure to use genuine Makita Li-Ion batteries only



CORDLESS ADVANTAGE

Tanpa Kord 充电式优势



Easy to Use

Mudah digunakan 方便使用

Start-up

Dihidupkan 启动

Engine tools

Alat kuasa enjin 引擎工具




Engine tools need time and tips to start-up

Alat kuasa enjin memerlukan masa untuk dihidupkan

引擎工具需要时间和技巧来启动

Cordless tools

Alat kuasa tanpa kord 充电式工具



Cordless tools start just after inserting battery and switching on

Alat kuasa tanpa kord mudah dihidupkan dengan pemasangan bateri sahaja

安装电池后并开启充电式工具便可开始工作

Constant speed control

Kelajuan tetap 电子恒速控制

Engine tools

Alat kuasa enjin 引擎工具



Engine tools are hard to keep the constant rotation speed under load

Alat kuasa enjin sukar untuk mengekalkan kelajuan putaran berterusan

引擎工具很难在负载下保持恒定的转速

Cordless tools

Alat kuasa tanpa kord 充电式工具



Cordless tools keep rotation speed under load with "Constant speed control" function

Alat kuasa tanpa kord berfungsi "kawalan kelajuan putaran berterusan"

充电式工具保持旋转 "恒定负载下的速度" 控制功能

Low noise (Noise level comparison)

Bunyi rendah 低噪声

Engine tools

Alat kuasa enjin 引擎工具



=

Cordless tools

Alat kuasa tanpa kord 充电式工具



Clean & Easy Maintenance

Bersih dan mudah dijaga 清洁和容易保养

Zero emission

Tanpa pelepasan asap 无排气


Engine tools

Alat kuasa enjin 引擎工具



Cordless tools

Alat kuasa tanpa kord 充电式工具



Cordless tools don't generate any exhaust gas

Alat kuasa tanpa kord tidak mengeluarkan gas ekzos

充电式工具不会产生废气

Cost and time reduction

Kurangkan kos dan masa 减少成本和时间

Engine tools

Alat kuasa enjin 引擎工具




It takes time to prepare mixed fuel for engine

Mengambil masa untuk menyediakan bahan api campuran untuk Enjin 需时为发动机准备混合燃料

Cordless tools

Alat kuasa tanpa kord 充电式工具



Just insert battery and ready to use

Pasangkan bateri dan sedia untuk digunakan

只需安装电池即可使用

Easy maintenance

Penyelenggaraan mudah 易于维护

Engine tools

Alat kuasa enjin 引擎工具



Engine oil



Air cleaner



Spark plug



Fuel plug



Grease up

Cordless tools

Alat kuasa tanpa kord 充电式工具



Cordless tools are maintenance - Free unlike engine tools

Alat kuasa tanpa kord bebas dari penyelenggaraan

充电式工具免维护

Long term storage

Penyimpanan jangka panjang 长期存放

Engine tools

Alat kuasa enjin 引擎工具



If you store the tool for a long period, when the fuel remained in the tank It may be a cause of trouble or defect

Alat kuasa enjin mungkin akan rosak sekiranya disimpan lama dengan bahan api dalam tangki

燃油长时间留放在油箱可能会造成工具故障

Cordless tools

Alat kuasa tanpa kord 充电式工具



Even if you store the tools for a long period, Just insert battery and ready to use

Walaupun menyimpan dalam jangka masa yang panjang, alat kuasa tanpa kord sedia digunakan dengan pemasangan bateri

充电式工具即使长时间存放，只需安装电池即可使用

Purpose-built Brushless Motors

Motor tanpa berus 无碳刷马达

BL MOTOR

Motor tanpa berus

无碳刷马达

Makita-built Brushless Motor eliminates carbon brushes, enabling the motor to run cooler and more efficiently for longer life. The electronically controlled Brushless Motor efficiently uses energy to match torque and RPM to the changing demands of the application

Motor tanpa berus yang dibuat oleh Makita menghapuskan berus karbon, membolehkan motor berjalan lebih sejuk, lebih cekap dan lebih tahan lama. Motor tanpa berus yang dikawal secara elektronik dengan cekap menggunakan tenaga untuk menyesuaikan tork dan RPM kepada perubahan permintaan aplikasi

Makita制造的无碳刷马达消除了碳刷，使马达更冷却的运作，更有效，更长使用寿命。电子控制的无碳刷马达有效地利用能量将扭力和RPM以配合不断变化的需求



XPT

EXTREME PROTECTION TECHNOLOGY

Teknologi Perlindungan Ekstrim


防尘防水滴技术



Enhanced dust and drip-resistant performance of the tools

Prestasi tahan debu dan tahan titisan air

提高工具的防尘与防水滴性能, 令工具更耐用

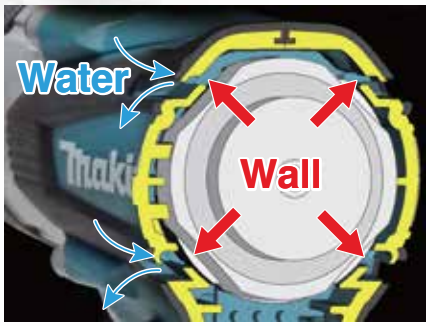

Because the walls are installed inside the vents, water and dust cannot enter easily.

Terdapat komponen elektronik yang dilapisi untuk menyekat kemasukan titisan debu dan air.

有包覆电子零组件阻绝粉尘、水滴入侵。



Dust-resistant

Tahan debu 防尘



Drip-resistant


Tahan titisan air 防水滴

The pictures do not mean to ensure the products are perfectly durable against dust and water, though they are designed to prevent dust and water ingress.

Walaupun XPT direka untuk tahan titisan air dan tahan debu, ia tidak menjamin berlakunya kerosakan alat kuasa yang disebabkan oleh air atau debu

注意: 照片为示意图。

XPT设计虽然可以抑制水或粉尘所带来的影响，但并不能保证因为水或粉尘所导致的故障发生。XPT设计概念主要是在恶劣环境之下也可正常工作。

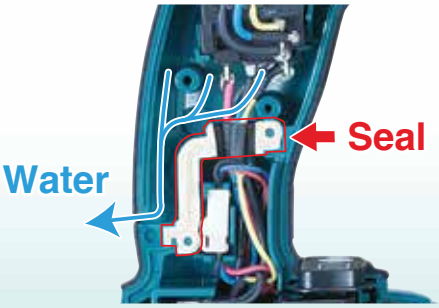

Moreover, even if water enters, it is discharged outside.

Sekiranya air masuk, ia dibuang ke luar.

若有水入侵時，也被排出外部。

AWS

Auto - start Wireless System

Sistem permulaan wayarles automatik

无线自动启动系统



Connects to Compatible Vacuum Cleaners with Bluetooth

Sambungan tanpa wayar dengan pembersih vakum yang serasi dengan Bluetooth 通过蓝牙连接到兼容的吸尘器

Bluetooth®

WUT01 wireless unit

Enables wireless connection of Makita AWS™ capable tools with AWS™ Vacuum Cleaners



Part No.199393-1

Untuk sambungan tanpa wayar alat kuasa AWS™ Makita dengan pembersih vacuum AWS™

Makita AWS™工具与AWS™吸尘器无线连接

WUT02 wireless unit adapter

Enables wireless connection of Makita AWS™ capable tools with most AC vacuum cleaner with auto start/ stop functions



Part No.199809-6


Sambungan tanpa wayar alat kuasa AWS™ Makita dengan pembersih vakum AC yang berfungsi permulaan/ berhenti automatik

无线连接具有Makita AWS™功能的电动工具与具有自动启动/停止功能的AC吸尘器


AVT

ANTI VIBRATION TECHNOLOGY

Teknologi Anti Getaran
防振技术

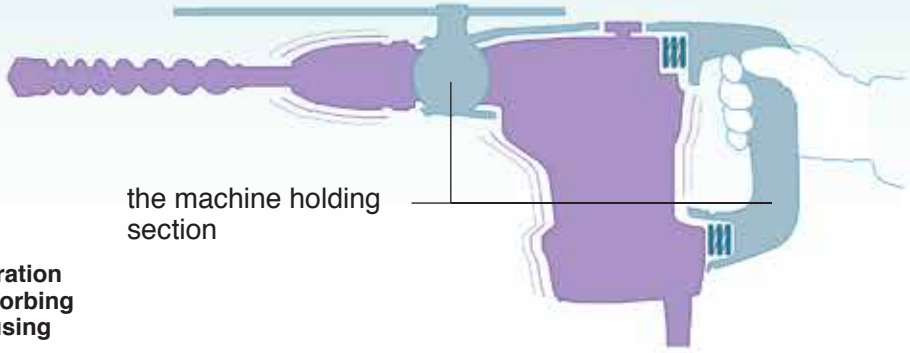



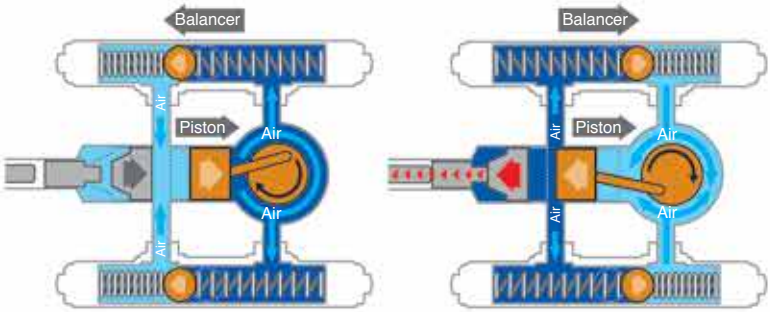



VIDEO CLIP
AVT
Models and specs may vary by country

SOFT NO LOAD

Getaran rendah tanpa beban
无负载时低振动

During no-load






Suppression of motor speed

Penindasan kelajuan motor 电机转速的抑制

- reduces vibration of tool body when idling, accordingly decreases the amount of vibration to operator's hands during a day's operation
  mengurangkan getaran badan alat ketika melahu, dengan itu mengurangkan jumlah getaran ke tangan pengendali semasa operasi sehari 减少空转时工具主体的振动，从而减少一天操作中操作者手部的振动量

- minimizes deflection of bit tip from aiming point when starting chipping
  meminimumkan pesongan bit tip dari titik sasaran apabila memulakan kerepotan
  开始切屑时，将刀尖从瞄准点的偏移减至最小

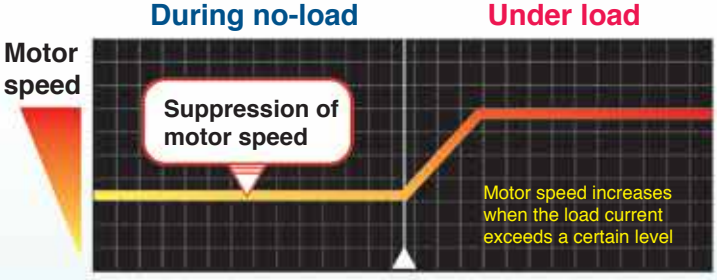

when starting chipping

Equipped with automatic speed control


Dilengkapi dengan kawalan laju automatik 设置自动速度控制功能

ADT

Automatic Torque Drive Technology
Teknology Tork Automatik
自动扭力驱动科技

Automatically changes the cutting speed according to load conditions for an optimum operation
Fungsi pertukaran kalajuan automatik 自动变速功能

- **On light duty: high-speed rotation mode**
- **On heavy duty: high torque mode**
- Pada tugas ringan: mod putaran berkelajuan tinggi
- Pada tugas berat: mod tork tinggi
- 轻载: 高速旋转模式
- 重载: 高扭矩模式

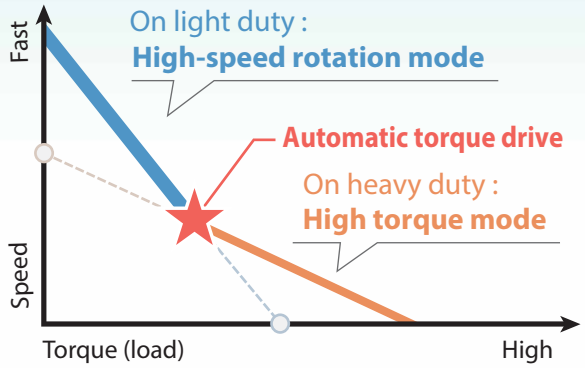




Smart function to minimize the danger of kick-back

Fungsi pintar untuk mengurangkan risiko kick-back 智慧型功能可减少反冲之危

AFT

Active Feedback Sensing Technology
Teknologi Sensor Maklum Balas Automatik
自动回顾感应科技

Shuts down the tool to protect the user, if the rotation speed suddenly slows down
Jika kelajuan putaran tiba-tiba dikurangkan, alat akan dimatikan secara automatik untuk melindungi pengguna
若旋转速度突然降低，工具将自动关闭以保护保护使用者

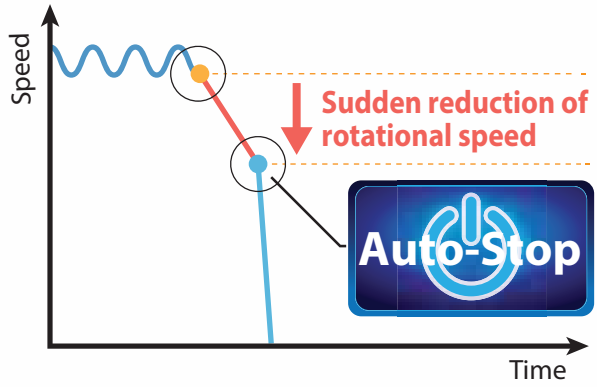



BRAKE

Electric Brake System
Sistem Brek Elektrik 电子自动刹车系统

Electric brake
Brek elektrik 电子自动刹车


Electric brake is activated after the tool is switched off
Brek elektrik diaktifkan selepas alat dimatikan
电子自动刹车在工具关闭后被启动

Large switch lever
Tuas suis yang besar 大开关杆

with lock-off function (without lock-on function)
Lock-off function prevents the switch lever from being accidentally pulled
dengan fungsi mengunci
menghalang tuas suis daripada ditarik secara tidak sengaja
锁定功能可防止开关杆被意外拉动

Anti-restart function
Fungsi anti-restart 防止意外重启功能

The motor does not start up if battery is inserted when the switch slid to "on".
Selepas memuatkan bateri, motor tidak bermula jika suis ditetapkan ke kedudukan "ON"
装入电池后，若开关设于「开启」位置时，马达不会启动

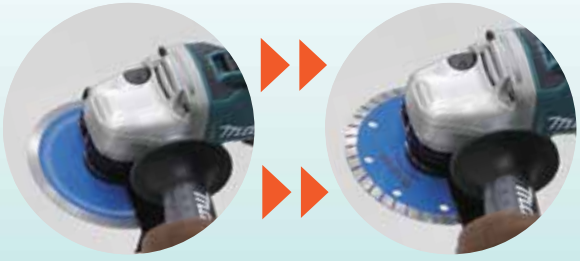

Electric brake is activated after the tool is switched off
Brek elektrik diaktifkan selepas alat dimatikan
电子自动刹车在工具关闭后被启动






SJS II
SUPER JOINT SYSTEM

TO SUPPRESS VIBRATION TO OPERATOR

Menahan Getaran 在操作时能抑止震动

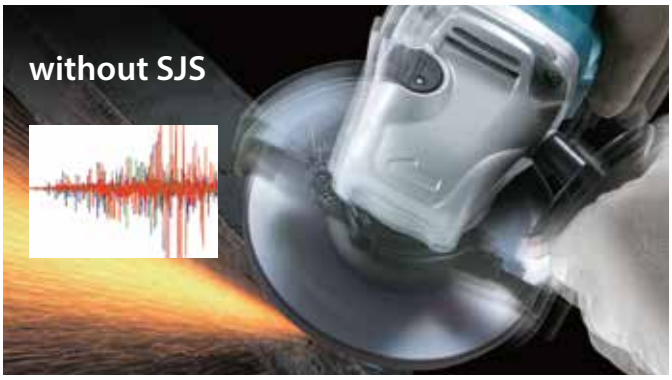





Structure of Super Joint System II

Struktur SJS generasi kedua 第二代 SJS 的结构

Leaf spring absorbs vibration and relieves shock during operation.


Leaf spring menyerap getaran dan mengurangkan kesan hentaman semasa operasi 在运行过程中，弹簧片吸收振动并减轻冲击

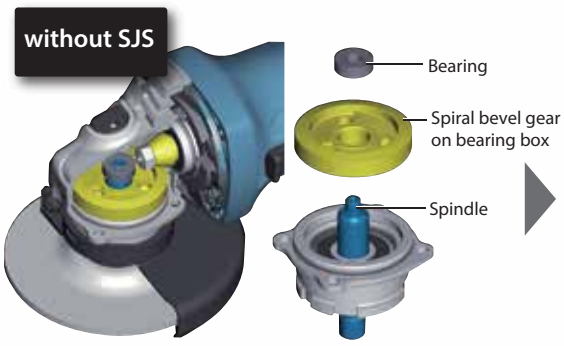

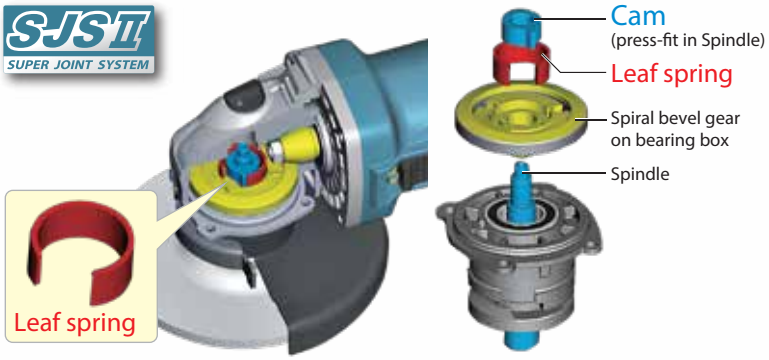

Absorption mechanism of vibration

Mekanisme penyerapan getaran 振动的吸收机能

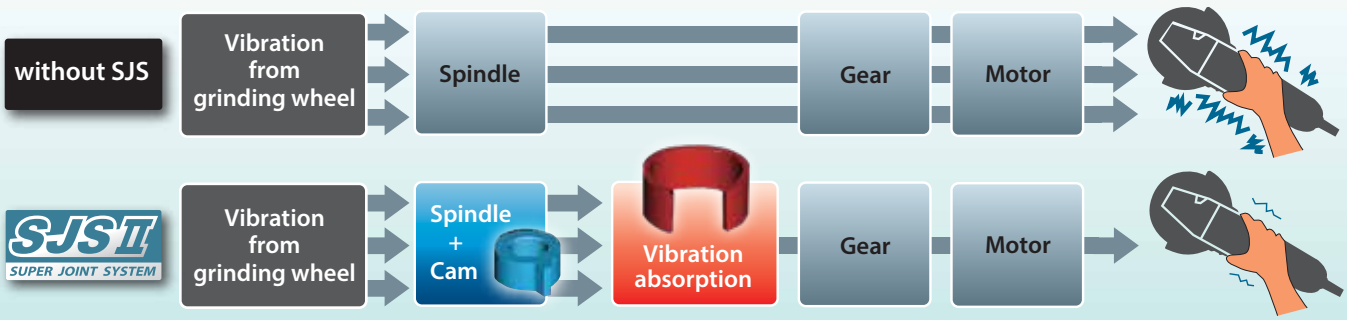

Automatic Self-cleaning Filtration System achieved by two filter units

Sistem Penapis Penyucian Automatik 自动清洗过滤系统

Constantly high suction power throughout operation because dust is removed from Prefilters every 10 seconds during operation

Kuasa penyedut yang berterusan sepanjang operasi kerana habuk dikeluarkan dari penapis setiap 10 saat semasa operasi

在整个运行过程中吸力保持在较高的水平，因为在运行过程中，每10秒就会从过滤器中除去灰尘



GYUPPA! Twin Filter



1 When switched on, machine starts suctioning using left & right two filter units

Apabila dihidupkan, mesin mula menyedut menggunakan unit penapis kiri dan kanan

打开时，机器使用左右两个过滤器单元开始吸尘

2 Left filter unit starts self-cleaning by shaking off dust while right filter continuous suctioning

Penapis kiri mula membersihkan diri dengan menggegarkan habuk semasa penapis kanan terus menyedut

左侧过滤器开始自我清洁而右侧过滤器继续吸入

3 Immediately after, right filter starts self-cleaning as well while left one re-starts suctioning once more

Penapis yang kanan akan mula membersihkan diri dengan penapis kiri akan bermula menyedut

右侧过滤器开始自我清洁，而剩下的过滤器再次开始吸入

4 Left & right both filters start suctioning with about 10 seconds interval repeatedly

Kiri dan kanan kedua-dua penapis bermula menyedut dengan kira-kira 10 saat selang berulang kali

左右两个过滤器开始约10秒抽吸间隔重复

Automatic self-cleaning filter (VC1310L, VC2510L, VC3210L)

Sistem Penapis Penyucian Automatik 自动清洗过滤系统

obtained by Triple filter structure composed of: Powder filter + Damper + Prefilter

Kuasa penyedutan yang berterusan sepanjang operasi kerana habuk dikeluarkan dari Prefilters setiap 10 saat semasa operasi

由三重过滤器结构得到：粉末过滤器+阻尼器+预过滤器



When the power is switched on, Prefilter collapses into itself to compress Damper, and fits closely over Damper and Powder filter.

Apabila kuasa dihidupkan, Prefilter runtuh ke dalamnya untuk memampatkan Damper, dan sesuai dengan penapis Damper dan Serbuk.

当接通电源时，Prefilter会自行折叠以压缩阻尼器，并紧密贴合阻尼器和粉末过滤器。

When the power is switched off, Damper expands back to its original size and shakes off dust from Prefilter automatically with its expanding power.

Apabila kuasa dimatikan, Damper mengembang kembali ke saiz asalnya dan mengelakkan habuk dari Prefilter secara automatik dengan kuasa yang berkembang.

当电源关闭时，阻尼器膨胀回到其原始尺寸，并通过扩展的功率自动将Prefilter的灰尘抖落。




DEEP CUTTING

Pemotongan dalam 深层切割

DXT
Deep and Exact Cutting Technology
Teknologi Pemotongan Ketepatan Dalam
深层精准切割技术

3-Stage reduction gear unit and Movable rear blade guard provide larger capacities of cutting Crown molding and Baseboard (Skirt board)


Peranti gear pengurangan tiga peringkat dan tutup belakang bilah gergaji boleh alih untuk pemotongan mudah diagonal garisan siling dan garis sudut (panel dinding) 三级减速齿轮装置及活动的后锯片护罩，方便斜切天花线和墙角线(护壁板)

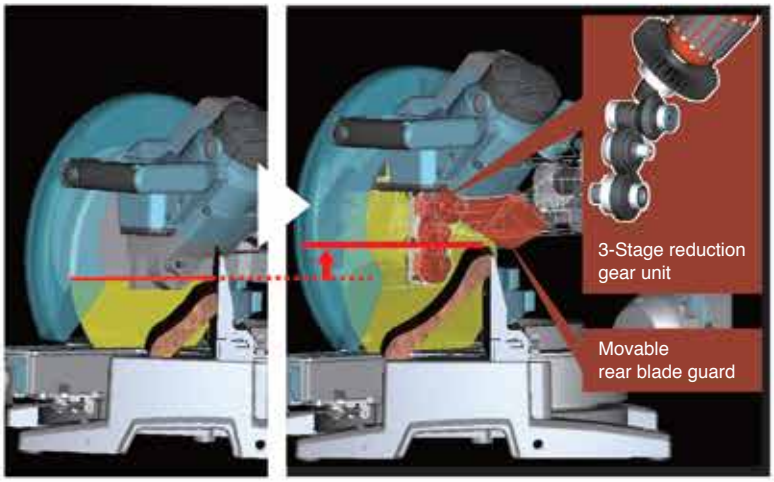

Capable of diagonal cutting up to **203mm (8") crown molding**



Capable of vertical cutting up to **165mm (6-1/2") baseboard (skirt board)**



EXACT CUTTING

Pemotongan ketepatan 精准切割


Double sliding mechanism

Teknologi pemotongan ketepatan dalam 双重滑动结构

Makita advantages obtained by using 4 short steel poles instead of 2 long poles are;
- Vibration-free, precise and exact cutting
- Compact tool design for jobsite portability

Gantikan 4 paip keluli panjang dengan 4 paip keluli pendek, supaya produk Makita mempunyai kelebihan berikut
- Bebas getaran, pemotongan tepat
- Reka bentuk alat padat untuk kemudahalihan medan

以4支短钢管取代2支长钢管，令牧田产品有以下优势之处
- 无振动，精确切割
- 紧凑的工具设计可实现现场便携性

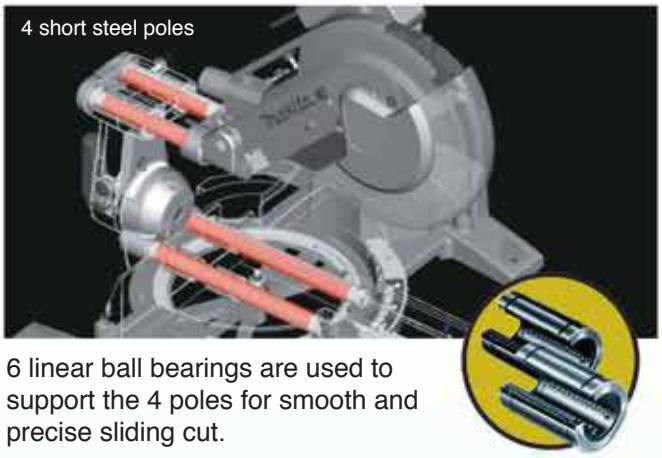


6 linear ball bearings are used to support the 4 poles for smooth and precise sliding cut.

Double sliding guide fence


Teknologi pemotongan ketepatan dalam 双重滑动引导栅

The upper and the lower sections slide independently for added convenience; each upper fence slides outwards for bevel cut, and each lower fence slide inwards to securely hold small workpiece for precise and exact cutting

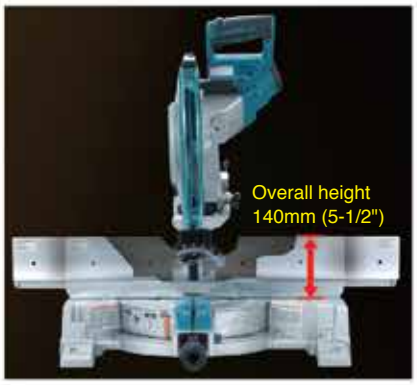

Bahagian atas dan bawah meluncur secara berasingan untuk kemudahan tambahan, grid panduan atas boleh meluncur ke luar pada sudut serong untuk dipotong, dan grid panduan bawah dapat meluncur ke dalam untuk memegang bahan-bahan kecil untuk memotong tepat

上下部分独立滑动以增加便利； 上部引导栅能向外滑动斜角切割，而下部引导栅能向内滑动以牢牢地固定小材料，以进行精确的切割



Quick and accurate miter angle lock

Kunci sudut miter yang cepat dan tepat
快速准确的斜接角度锁定

- Miter angle can be locked/unlocked simply by turning the knob 90 degrees.
- With positive stops at 0, 15, 22.5, 31.6, 45 degrees


LS003G


LS004G


LS002G


DLS211


DLS111


DLS600


LS1019L


LS1219L

MAKPAC POWER SOURCE KIT

Set Bateri MAKPAC | MAKPAC锂电池套装



1 **Makpac Connector Box Type 1** (821549-5)
Kotak Sambungan Makpac 工具连接箱

2 **1x Adapter ADP10** (191C11-5)
Penyesuai
适配器

3 **1x Fast Charger DC40RA** (191E08-6)
Pengecas Pantas
快速充电器

4 **1x 2.5Ah Battery BL4025** (191B36-3)
1x 6.0Ah Battery BL1860B (197422-4)
Bateri 锂电池

BASIC
40Vmax 2.5Ah + 18V 6.0Ah

PSKG1
(191T63-8)



1 **Makpac Connector Box Type 1** (821549-5)
Kotak Sambungan Makpac 工具连接箱

2 **1x Fast Charger DC40RA** (191E08-6)
Pengecas Pantas 快速充电器

3 **2x 2.5Ah Battery BL4025** (191B36-3)
Bateri 锂电池

POWER
40Vmax 2.5Ah

MKP1G001
(191J86-6)



1 **1x Fast Charger DC40RA** (191E08-6)
Pengecas Pantas 快速充电器

2 **1x 4.0Ah Battery BL4040** (191B26-6)
Bateri 锂电池

BASIC
40Vmax 4.0Ah

PSKG0
(191J70-1)



1 **Makpac Connector Box Type 1** (821549-5)
Kotak Sambungan Makpac 工具连接箱

2 **1x Fast Charger DC40RA** (191E08-6)
Pengecas Pantas 快速充电器

3 **2x 4.0Ah Battery BL4040** (191B26-6)
Bateri 锂电池

POWER
40Vmax 4.0Ah

MKP1G002
(191K02-4)



1 **Makpac Connector Box Type 3** (821551-8)
Kotak Sambungan Makpac 工具连接箱

2 **1x Two Port Multi Fast Charger DC40RB** (191N14-5)
Pengecas Pantas Dua Port
两端快速充电器

3 **2x 5.0Ah Battery BL4050F** (--)
Bateri 锂电池

ADVANCED
40Vmax 5.0Ah

PSKG3
(191U20-2)




1 **Makpac Connector Box Type 3** (821551-8)
Kotak Sambungan Makpac 工具连接箱

2 **1x Two Port Multi Fast Charger DC40RB** (191N14-5)
Pengecas Pantas Dua Port
两端快速充电器

3 **4x 5.0Ah Battery BL4050F** (--)
Bateri 锂电池

ULTIMATE
40Vmax 5.0Ah

PSKG3
(191U48-0)

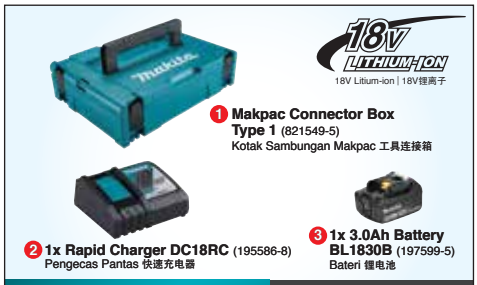


1 **Makpac Connector Box Type 1** (821549-5)
Kotak Sambungan Makpac 工具连接箱

2 **1x Rapid Charger DC18RC** (195586-8)
Pengecas Pantas 快速充电器

3 **1x 3.0Ah Battery BL1830B** (197599-5)
Bateri 锂电池

BASIC
18V 3.0Ah

MKP1RF181
(197973-7)

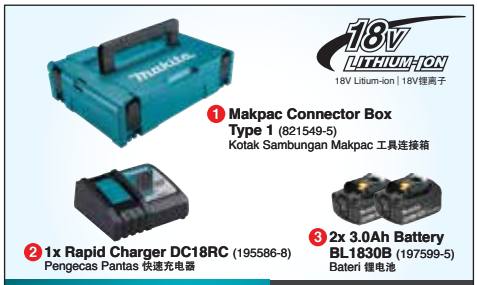


1 **Makpac Connector Box Type 1** (821549-5)
Kotak Sambungan Makpac 工具连接箱

2 **1x Rapid Charger DC18RC** (195586-8)
Pengecas Pantas 快速充电器

3 **2x 3.0Ah Battery BL1830B** (197599-5)
Bateri 锂电池

POWER
18V 3.0Ah

MKP1RF182
(197974-5)

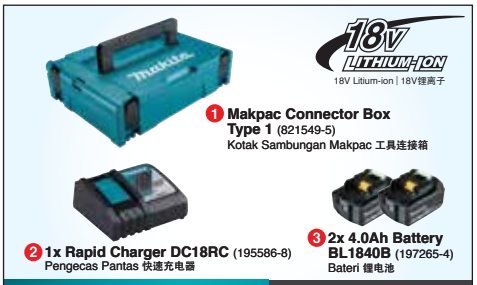


1 **Makpac Connector Box Type 1** (821549-5)
Kotak Sambungan Makpac 工具连接箱

2 **1x Rapid Charger DC18RC** (195586-8)
Pengecas Pantas 快速充电器

3 **2x 4.0Ah Battery BL1840B** (197265-4)
Bateri 锂电池

POWER
18V 4.0Ah

MKP1RM182
(191L71-1)

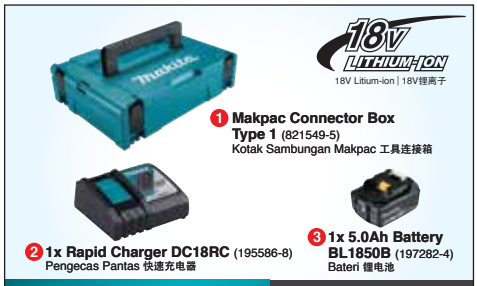


1 **Makpac Connector Box Type 1** (821549-5)
Kotak Sambungan Makpac 工具连接箱

2 **1x Rapid Charger DC18RC** (195586-8)
Pengecas Pantas 快速充电器

3 **1x 5.0Ah Battery BL1850B** (197282-4)
Bateri 锂电池

BASIC
18V 5.0Ah

MKP1RT181
(197801-6)

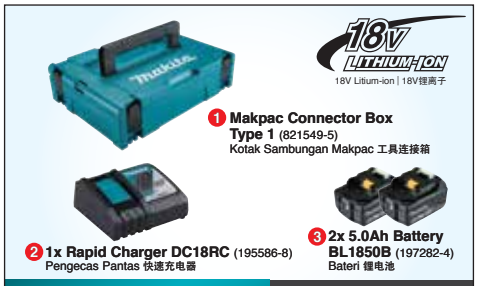

1 **Makpac Connector Box Type 1** (821549-5)
Kotak Sambungan Makpac 工具连接箱

2 **1x Rapid Charger DC18RC** (195586-8)
Pengecas Pantas 快速充电器

3 **2x 5.0Ah Battery BL1850B** (197282-4)
Bateri 锂电池

POWER
18V 5.0Ah

MKP1RT182
(197803-2)



1 **Makpac Connector Box Type 3** (821551-8)
Kotak Sambungan Makpac 工具连接箱

2 **1x Two Port Multi Rapid Charger DC18RD** (196934-4)
Pengecas Pantas Dua Port 两端快速充电器

3 **2x 5.0Ah Battery BL1850B** (197282-4)
Bateri 锂电池

ADVANCED
18V 5.0Ah

MKP3PT182
(198182-1)




1 **Makpac Connector Box Type 3** (821551-8)
Kotak Sambungan Makpac 工具连接箱

2 **1x Two Port Multi Rapid Charger DC18RD** (196934-4)
Pengecas Pantas Dua Port 两端快速充电器

3 **4x 5.0Ah Battery BL1850B** (197282-4)
Bateri 锂电池

ULTIMATE
18V 5.0Ah

MKP3PT184
(197627-6)

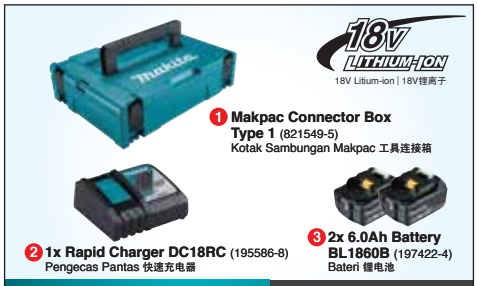

1 **Makpac Connector Box Type 1** (821549-5)
Kotak Sambungan Makpac 工具连接箱

2 **1x Rapid Charger DC18RC** (195586-8)
Pengecas Pantas 快速充电器

3 **2x 6.0Ah Battery BL1860B** (197422-4)
Bateri 锂电池

ADVANCED
18V 6.0Ah

MKP1RG182
(198119-8)




1 **Makpac Connector Box Type 3** (821551-8)
Kotak Sambungan Makpac 工具连接箱

2 **1x Two Port Multi Rapid Charger DC18RD** (196934-4)
Pengecas Pantas Dua Port 两端快速充电器

3 **4x 6.0Ah Battery BL1860B** (197422-4)
Bateri 锂电池

ULTIMATE
18V 6.0Ah

MKP3PG184
(198095-6)

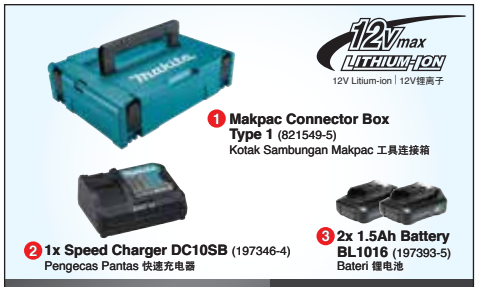


1 **Makpac Connector Box Type 1** (821549-5)
Kotak Sambungan Makpac 工具连接箱

2 **1x Speed Charger DC10SB** (197346-4)
Pengecas Pantas 快速充电器

3 **2x 1.5Ah Battery BL1016** (197393-5)
Bateri 锂电池

BASIC
12Vmax 1.5Ah

MKP1SY122
(197654-3)

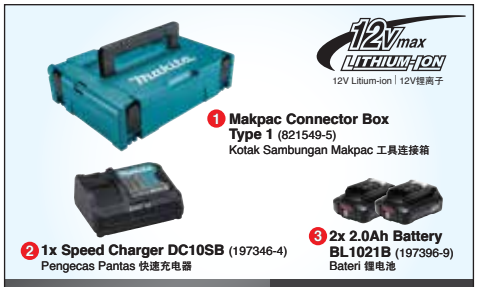


1 **Makpac Connector Box Type 1** (821549-5)
Kotak Sambungan Makpac 工具连接箱

2 **1x Speed Charger DC10SB** (197346-4)
Pengecas Pantas 快速充电器

3 **2x 2.0Ah Battery BL1021B** (197396-9)
Bateri 锂电池

POWER
12Vmax 2.0Ah

MKP1SA122
(197664-0)

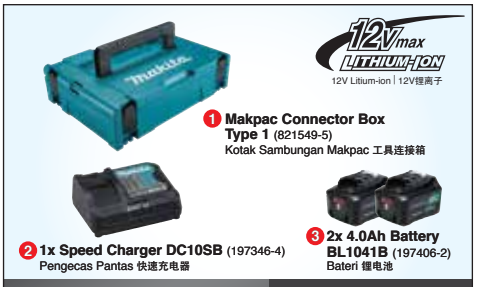

1 **Makpac Connector Box Type 1** (821549-5)
Kotak Sambungan Makpac 工具连接箱

2 **1x Speed Charger DC10SB** (197346-4)
Pengecas Pantas 快速充电器

3 **2x 4.0Ah Battery BL1041B** (197406-2)
Bateri 锂电池

ULTIMATE
12Vmax 4.0Ah

MKP1SM122
(197640-4)

Comfortable for Long Hours Operation

Selesa untuk operasi masa panjang 舒适的长时间操作

Portable Power Pack

Bekalan kuasa mudah alih 背式电池扩充座

PDC1200

40Vmax Li-ion 40Vmax锂离子 | 18V Li-ion X2 18V锂离子 X2

Capacity Kapasiti 能力	**33.5Ah**
Energy Capacity Keupayaan Tenaga 能量容量	**1,206Wh**
Power Supply Cord Kord Bekalan Kuasa 能源线	**Battery Side: 1.1 m (3.6 ft)** **Adapter Side: 0.6 m (2.0 ft)**

ENERGY CAPACITY COMPARISON

PDC1200



1 : 11 Ratio

18V 6.0Ah Battery



IPX4 Water Resistance

*Equipped with built-in battery cells





Quickly removable harness can be attached/ removed from the main unit with a single action

Tali sandang bahu cepat dilepaskan, ia boleh dipasang atau dikeluarkan dari unit utama dengan hanya satu operasi
快速拆卸式背带，只需一次操作即可将其安装在主机上或从主机上卸下

Cord length 1.1m

Panjang kord 电源线长度

Reflectors keep operator visible from a distance even in the dark

Reflektor meningkatkan keselamatan kerja malam
提高夜间作业安全性的反射材料



Charger DC4001

- **Equipped with a fan to cool down the charging circuit board**
- **Removable AC inlet plug**

Pengecas DC4001 dilengkapi dengan kipas untuk menyejukkan papan litar pengecasan dan soket kuasa AC yang boleh ditanggalkan
充电器 DC4001配备风扇冷却充电电路板，可拆卸交流电源插座





PDC1200A01 included
- 18Vx2 Adapter (Part No. 191J51-5)
- DC4001 Battery Charger Set (Part No. 191L01-2)
- Harness Assembly (127668-8)

*Equipped with built-in battery cells

Optional for PDC1200 & PDC01
40Vmax Adapter Set (191N62-4)



Portable Power Pack

Bekalan kuasa mudah alih 背式电池扩充座

PDC01

40Vmax Li-ion 40Vmax锂离子 | 18V Li-ion X2 18V锂离子 X2 | 18V Li-ion 18V锂离子

Capacity Kapasiti 能力	**18V x2 : 12 Ah** (with BL1860B x4) **18V : 24 Ah** (with BL1860B x4)
Energy Capacity Keupayaan Tenaga 能量容量	**432Wh (BL1860Bx4)**
Power Supply Cord Kord Bekalan Kuasa 能源线	**1.7 m (5.6 ft)**

TWO VARIATIONS



*Without Battery

1 **PDC01** (191A62-6) included
- 18V Adapter (Part No. 191J50-7)
- 18Vx2 Adapter (Part No. 191J51-5)
- Harness Assembly



*Without Battery

2 **PDC01** (191A67-6) included
- 18Vx2 Adapter (Part No. 191J51-5)
- Harness Assembly



Comfortable, adjustable backpack harness

Tali sandang bahu yang selesa dan boleh laras
舒适可调节的背带

IPX4 Water Resistance



Battery cover Protection from water and dust

Penutup bateri untuk perlindungan daripada air dan habuk
防水防尘电池盖

*Without battery

Lightweight
Ringan 轻量
7 kg
with 4x BL1850B 5.0Ah Battery

Cord length 1.7m

Panjang kord 电源线长度

Fuel gauge for each battery indicates the battery status by two green lights

Penunjuk tahap bateri menunjukkan status bateri dengan dua lampu hijau
每个电池的电量计，通过两个绿色指示灯指示电池状态

Main power switch With auto-off function

Suis kuasa utama dengan fungsi auto-off 主电源开关具有自动关机功能

Battery Adapter

Penyesuai bateri 电池适配器

BAP182 (197581-4)

18V Li-ion X2 18V锂离子 X2 | 18V Li-ion 18V锂离子

Compatible Batteries	**18V : 1.5Ah to 6.0Ah**

*Without Charger & Batteries



Reducing fatigue by transfer the battery weight from hand and arms to waist or shoulder

Kurangkan keletihan dengan mengalihkan berat bateri dari tangan dan lengan ke pinggang atau bahu
通过将电池重量从手和手臂转移到腰部或肩部来减轻疲劳

Convenience for every OCCASION

Sesuai Untuk Pelbagai Kegunaan/ 适用于任何场合

Heat-resistant Temperature 0 ~ 60°c
Suhu tahan haba 0 ~ 60°c
保冷度0 ~ 60°c

Maintaning COOL Temperature
Mengekalkan suhu sejuk
冷藏专用

MAKPAC Cool Box

Kotak Sejuk MAKPAC/ 层叠式冷藏箱

20mm thickness formed polystyrene, sealing strips are placed around the mating surface of lid and box
Dibuat dari ketebalan 20mm polistirena dan dipasang dengan jalur pengedap di sekeliling permukaan penutup dan kotak
箱体壁厚为20mm，盖子和箱子的连接处配备密封条





11L

500mL × 10 | 2L × 2

(Type 3)

Part No. **198254-2**

- **Dimensions**
  Dimensi I 体积 (L x W x H)
  295 x 395 x 210mm (11-5/8" x 15-1/2" x 8-1/4")
- **Net weight**
  Berat bersih I 净重
  2.9kg (6.3lbs)

Come with Shoulder belt
Dilengkapkan dengan tali pemegang bahu | 配备背负肩带



- **Both type can be equipped with a shoulder strap**
  Kedua-dua jenis Makpac boleh dipasang dengan tali pemegang bahu
  两种型号皆可配备肩带





18L

500mL × 20 | 2L × 4

(Type 4)

Part No. **198253-4**

- **Dimensions**
  Dimensi I 体积 (L x W x H)
  295 x 395 x 315mm (11-5/8" x 15-1/2" x 12-3/8")
- **Net weight**
  Berat bersih I 净重
  3.7kg (8.1lbs)



Type 1 Part No. 821549-5

Type 2 Part No. 821550-0

Type 3 Part No. 821551-8

Type 4 Part No. 821552-6

- **MAKPAC Box**
  Kotak Makpac
  工具连接箱





Part No. **TR00000002**

- **Able to stack on MAKPAC trolley for easy loading (option)**
  Boleh ditambah dan disambung atas troli Makpac untuk memudahkan kerja pengalihan kotak Makpac (pilihan)
  Makita工具箱可以添加并连接到拖运车，以方便搬运(选择性)

18V Lithium-ion

LXT®

Teknologi Ekstrim Litium-ion
锂离子技术

CORDLESS COMBO KIT

Pakej kombo peralatan tanpa kord 充电式工具套装

18V LITHIUM-ION
18V Litium-ion I 18V锂离子

CORDLESS COMBO KIT
Pakej kombo peralatan tanpa kord 充电式工具套装

DLX2248PT1









18V X2 36V

BL MOTOR
Motor tanpa berus 无碳刷马达

2 **1x DCL181F Cordless Cleaner**
Pembersih Vakum Tanpa Kord
充电式便携吸尘机

1x 5.0Ah Battery (BL1850B)
Bateri 5.0Ah (BL1850B)
5.0Ah 电池 (BL1850B)



3 **1x Makita Tool Bag**
Beg Alat Makita
Makita 工具袋

1 **1x DVC260Z**
Cordless Backpack Vacuum Cleaner
Pembersih Vakum Beg Galas Tanpa Kord
充电式背负吸尘机

2x 5.0Ah Battery (BL1850B)
Bateri 5.0Ah (BL1850B)
5.0Ah 电池 (BL1850B)





4 **1x Two Port Multi**
Rapid Charger (DC18RD)
Pengecas Pantas Dua Port (DC18RD)
两端快速充电器 (DC18RD)





1x Round Brush (198877-6)
Berus Bulat 圆刷
1x Flexible Rubber Nozzle (197900-4)
Muncung Getah Fleksibel 弹性吸嘴
1x Nozzle Assembly (199037-3)
Komponen Muncung 吸嘴组件
1x Corner Nozzle (198918-8)
Muncung Sudut 角落吸嘴
1x Flexible Hose (198867-9)
Hos Fleksibel 软管



10pcs Paper Dust Bag
(197902-0)
Beg Habuk Kertas
纸制集尘袋



10pcs Filter
(198914-6)
Penapis 尘袋

CORDLESS COMBO KIT
Pakej kombo peralatan tanpa kord 充电式工具套装

DLX3131TX2

18V LITHIUM-ION
18V Litium-ion I 18V锂离子



BL MOTOR
Motor tanpa berus 无碳刷马达

XPT EXTREME PROTECTION TECHNOLOGY
Teknologi Perlindungan Ekstrim
防尘防水滴技术

1 1x DHR242 24mm (15/16")
Cordless Combination Hammer
Tukul Kombinasi Tanpa Kord 充电式冲击电钻电锤
1x 5.0Ah Battery (BL1850B)
Bateri 5.0Ah (BL1850B) 5.0Ah 电池 (BL1850B)



BL MOTOR
Motor tanpa berus 无碳刷马达

XPT EXTREME PROTECTION TECHNOLOGY
Teknologi Perlindungan Ekstrim
防尘防水滴技术

2 1x DTW285 12.7mm (1/2")
Cordless Impact Wrench
Perengkuh Impak Tanpa Kord 充电式冲击套筒扳手
1x 5.0Ah Battery (BL1850B)
Bateri 5.0Ah (BL1850B) 5.0Ah 电池 (BL1850B)



BL MOTOR
Motor tanpa berus 无碳刷马达

XPT EXTREME PROTECTION TECHNOLOGY
Teknologi Perlindungan Ekstrim
防尘防水滴技术

3 1x DGA404 100mm (4")
Cordless Angle Grinder
Pengisar Sudut Tanpa Kord 角向磨光机
1x 5.0Ah Battery (BL1850B)
Bateri 5.0Ah (BL1850B) 5.0Ah 电池 (BL1850B)
1x Depressed Centre Wheel (A-80852)
Cakera Abrasive 磨片



4 1x Two Port Multi
Rapid Charger (DC18RD)
Pengecas Pantas Dua Port (DC18RD)
两端快速充电器 (DC18RD)



5 1x Makita Tool Bag
(831271-6)
Beg Alat Makita
Makita 工具袋

CORDLESS COMBO KIT
Pakej kombo peralatan tanpa kord 充电式工具套装

DLX2218X



18V LITHIUM-ION
18V Litium-ion I 18V锂离子

1 1x Rapid Charger (DC18RC)
Pengecas Pantas (DC18RC)
快速充电器 (DC18RC)



XPT EXTREME PROTECTION TECHNOLOGY
Teknologi Perlindungan Ekstrim
防尘防水滴技术

2 1x DHR165 16mm (5/8")
Cordless Rotary Hammer
Tukul Berputar Tanpa Kord 充电式电锤
1x 3.0Ah Battery (BL1830B)
Bateri 3.0Ah (BL1830B) 3.0Ah 电池 (BL1830B)



3 1x DTW190 12.7mm (1/2")
Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手
1x 3.0Ah Battery (BL1830B)
Bateri 3.0Ah (BL1830B)
3.0Ah 电池 (BL1830B)



4 1x Makita Aluminium
Suitcase
Beg Bimbit Aluminium Makita
Makita 铝合金工具箱

CORDLESS COMBO KIT
Pakej kombo peralatan tanpa kord 充电式工具套装

DLX2220



18V LITHIUM-ION
18V Litium-ion I 18V锂离子

1 1x Rapid Charger (DC18RC)
Pengecas Pantas (DC18RC)
快速充电器 (DC18RC)



2 1x DTD155 Cordless
Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机
1x 3.0Ah Battery (BL1830B)
Bateri 3.0Ah (BL1830B)
3.0Ah 电池 (BL1830B)

BL MOTOR
Motor tanpa berus 无碳刷马达

XPT EXTREME PROTECTION TECHNOLOGY
Teknologi Perlindungan Ekstrim
防尘防水滴技术



3 1x DDF483 13mm (1/2")
Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻
1x 3.0Ah Battery (BL1830B)
Bateri 3.0Ah (BL1830B)
3.0Ah 电池 (BL1830B)

BL MOTOR
Motor tanpa berus 无碳刷马达

XPT EXTREME PROTECTION TECHNOLOGY
Teknologi Perlindungan Ekstrim
防尘防水滴技术



4 1x Makita Tool Bag
Beg Alat Makita
Makita 工具袋

CORDLESS COMBO KIT
Pakej kombo peralatan tanpa kord 充电式工具套装

DLX2424JX1

18V LITHIUM-ION
18V Litium-ion I 18V锂离子

BL MOTOR
Motor tanpa berus 无碳刷马达

XPT
EXTREME PROTECTION TECHNOLOGY
Teknologi Perlindungan Ekstrim
防尘防水满技术



1 **1x Rapid Charger** (DC18RC)
Pengecas Pantas (DC18RC)
快速充电器 (DC18RC)



2 **1x DMP180**
Cordless Inflator
Inflator Tanpa Kord 充电式打气机
1x 5.0Ah Battery (BL1850B)
Bateri 5.0Ah (BL1850B)
5.0Ah 电池 (BL1850B)



3 **1x DTW300**
Cordless Impact Wrench
Perengkuh Impak Tanpa Kord 充电式冲击套筒扳手
1x 5.0Ah Battery (BL1850B)
Bateri 5.0Ah (BL1850B) 5.0Ah 电池 (BL1850B)



4 **Makpac Connector Box**
Kotak Sambungan Makpac 工具连接箱

CORDLESS COMBO KIT
Pakej kombo peralatan tanpa kord 充电式工具套装

DLX2417JX1

18V LITHIUM-ION
18V Litium-ion I 18V锂离子



1 **1x Rapid Charger** (DC18RC)
Pengecas Pantas (DC18RC)
快速充电器 (DC18RC)



BL MOTOR
Motor tanpa berus 无碳刷马达

XPT
EXTREME PROTECTION TECHNOLOGY
Teknologi Perlindungan Ekstrim
防尘防水满技术

2 **1x DHP484**
Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi 冲击螺丝起子电钻
1x 3.0Ah Battery (BL1830B)
Bateri 3.0Ah (BL1830B)
3.0Ah 电池 (BL1830B)



3 **1x DTD156**
Cordless Impact Driver
Pemutar Skru Impak 冲击螺丝起子机
1x 3.0Ah Battery (BL1830B)
Bateri 3.0Ah (BL1830B) 3.0Ah 电池 (BL1830B)

4 **1x Double Ended Twist Torsion Screw Bit**
Skru Kilasan Pintal Dua Mata
双头扭曲扭力螺丝批头
1x (+)(-) Bit
Mata Skru 螺丝批头





5 **Makpac Connector Box**
Kotak Sambungan Makpac 工具连接箱

CORDLESS COMBO KIT
Pakej kombo peralatan tanpa kord 充电式工具套装

DLX2414JX2

18V LITHIUM-ION
18V Litium-ion I 18V锂离子



1 **1x Rapid Charger** (DC18RC)
Pengecas Pantas (DC18RC)
快速充电器 (DC18RC)



BL MOTOR
Motor tanpa berus 无碳刷马达

XPT
EXTREME PROTECTION TECHNOLOGY
Teknologi Perlindungan Ekstrim
防尘防水满技术

2 **1x DTD157**
Cordless Impact Driver
Pemutar Skru Impak 冲击螺丝起子机
1x 2.0Ah Battery (BL1820B)
Bateri 2.0Ah (BL1820B)
2.0Ah 电池 (BL1820B)



3
1x DHP487
Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi 冲击螺丝起子电钻
1x 2.0Ah Battery (BL1820B)
Bateri 2.0Ah (BL1820B) 2.0Ah 电池 (BL1820B)

4 **1x Double Ended Twist Torsion Screw Bit**
Skru Kilasan Pintal Dua Mata
双头扭曲扭力螺丝批头
1x (+)(-) Bit
Mata Skru 螺丝批头





5 **Makpac Connector Box**
Kotak Sambungan Makpac 工具连接箱

CORDLESS COMBO KIT
Pakej kombo peralatan tanpa kord 充电式工具套装

DLX2423JX2

18V LITHIUM-ION
18V Litium-ion I 18V锂离子



1 **1x Rapid Charger** (DC18RC)
Pengecas Pantas (DC18RC)
快速充电器 (DC18RC)



BL MOTOR
Motor tanpa berus 无碳刷马达

XPT
EXTREME PROTECTION TECHNOLOGY
Teknologi Perlindungan Ekstrim
防尘防水满技术

2 **1x DTD157**
Cordless Impact Driver
Pemutar Skru Impak 冲击螺丝起子机
1x 2.0Ah Battery (BL1820B)
Bateri 2.0Ah (BL1820B)
2.0Ah 电池 (BL1820B)



3
1x DDF487
Cordless Driver Drill
Gerudi Pemutar Skru 螺丝起子电钻
1x 2.0Ah Battery (BL1820B)
Bateri 2.0Ah (BL1820B) 2.0Ah 电池 (BL1820B)

4 **1x Double Ended Twist Torsion Screw Bit**
Skru Kilasan Pintal Dua Mata
双头扭曲扭力螺丝批头
1x (+)(-) Bit
Mata Skru 螺丝批头





5 **Makpac Connector Box**
Kotak Sambungan Makpac 工具连接箱

CORDLESS COMBO KIT
Pakej kombo peralatan tanpa kord 充电式工具套装

DK0090SWX1



1 1x Standard Charger (DC18SD)
Pengecas Standard (DC18SD)
标准充电器 (DC18SD)

2 1x 1.5Ah Battery (BL1815N)
Bateri 1.5Ah (BL1815B)
1.5Ah 电池 (BL1815B)

3 1x DCL180 Cordless Cleaner (White)
Pembersih Vakum Tanpa Kord (Putih)
充电式便携吸尘机 (白)

1x Filter (443060-3)
Penapis 过滤器
1x Pre Filter (451208-3)
Penapis Depan 前置过滤器

1x Flexible Hose (198867-9)
Hos Fleksibel 软管
1x Round Brush (198877-6)
Berus Bulat 圆刷
1x Shelf Brush (198872-6)
Berus Rata 扁毛刷

4 1x DF001D 3.6V Cordless Screwdriver (Built-in Battery)
Pemutar Skru Tanpa Kord (Bateri terbina dalam)
充电式螺丝起子机 (内置电池)

5 1x ADP07 Adapter for USB
Pengecas 充电器

6 1x Makita Tool Bag (831271-6)
Beg Alat Makita
Makita 工具袋

18V LITHIUM-ION
18V Lithium-ion | 18V锂离子

CORDLESS COMBO KIT
Pakej kombo peralatan tanpa kord 充电式工具套装

DK0089WX1



1 1x Standard Charger (DC10WD)
Pengecas Standard (DC10WD)
标准充电器 (DC10WD)

2 1x 1.5Ah Battery (BL1016)
Bateri 1.5Ah (BL1016)
1.5Ah 电池 (BL1016)

3 1x CL107FD Cordless Cleaner (White)
Pembersih Vakum Tanpa Kord (Putih)
充电式便携吸尘机 (白)

5pcs Paper Filter (194566-1)
Penapis Kertas 纸制尘袋

1x Flexible Hose (198867-9)
Hos Fleksibel 软管
1x Round Brush (198877-6)
Berus Bulat 圆刷
1x Shelf Brush (198872-6)
Berus Rata 扁毛刷

4 1x DF001D 3.6V Cordless Screwdriver (Built-in Battery)
Pemutar Skru Tanpa Kord (Bateri terbina dalam)
充电式螺丝起子机 (内置电池)

5 1x ADP07 Adapter for USB
Pengecas 充电器

6 1x Makita Tool Bag (831271-6)
Beg Alat Makita
Makita 工具袋

12Vmax LITHIUM-ION
12V Lithium-ion | 12V锂离子

CORDLESS COMBO KIT
Pakej kombo peralatan tanpa kord 充电式工具套装

CLX224



1 1x Standard Charger (DC10WD)
Pengecas Standard (DC10WD)
标准充电器 (DC10WD)

2 1x TD110D Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机
1x 1.5Ah Battery (BL1016)
Bateri 1.5Ah (BL1016)
1.5Ah 电池 (BL1016)

3 1x DF333D Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻
1x 1.5Ah Battery (BL1016)
Bateri 1.5Ah (BL1016)
1.5Ah 电池 (BL1016)

4 1x Makita Tool Bag
Beg Alat Makita
Makita 工具袋

12Vmax LITHIUM-ION
12V Lithium-ion | 12V锂离子

CORDLESS COMBO KIT
Pakej kombo peralatan tanpa kord 充电式工具套装

CLX224X1

WHILE STOCK LAST
Sementara stok masih ada 售完即止



1 1x Standard Charger (DC10WD)
Pengecas Standard (DC10WD)
标准充电器 (DC10WD)

2 1x TD110D Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机
1x 1.5Ah Battery (BL1016)
Bateri 1.5Ah (BL1016)
1.5Ah 电池 (BL1016)

3 1x DF333D Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻
1x 1.5Ah Battery (BL1016)
Bateri 1.5Ah (BL1016)
1.5Ah 电池 (BL1016)

4 1x Makita Aluminium Suitcase
Beg Bimbit Aluminium Makita
Makita 铝合金工具箱

12Vmax LITHIUM-ION
12V Lithium-ion | 12V锂离子

CORDLESS COMBO KIT
Pakej kombo peralatan tanpa kord 充电式工具套装

CLX206AX2



1 1x Standard Charger (DC10WD)
Pengecas Standard (DC10WD)
标准充电器 (DC10WD)

2 1x TM30D Cordless Multi Tool
Mesin Pemotong Pelbagai Guna Tanpa Kord
充电式多功能切磨机
1x 2.0Ah Battery (BL1021B)
Bateri 2.0Ah (BL1021B)
2.0Ah 电池 (BL1021B)
1x Accessories Set
Set Aksesori 配件套装

3 1x DF331D Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻
1x 2.0Ah Battery (BL1021B)
Bateri 2.0Ah (BL1021B)
2.0Ah 电池 (BL1021B)
1x Phillips Bit
Mata Skru 螺丝批头

4 1x Makita Tool Bag (831253-8)
Beg Alat Makita
Makita 工具袋

12Vmax LITHIUM-ION
12V Lithium-ion | 12V锂离子

XGT

40V max Li-ion

XGT X2 80V max



High Power
Kuasa Tinggi 高马力

Durability
Ketahanan 超耐用

Digital Communication
Sistem Pintar 智能系统

Battery

BL4020 (2.0Ah)
BL4025 (2.5Ah)
BL4040 (4.0Ah)
BL4050F (5.0Ah)

Charger

DC40RA
DC40RB
DC40RC
ADP10
Adapter for LXT Battery

XGT X2 80Vmax | 40Vmax Li-ion | XGT

Li-ion Ah 5.0 | 4.0 | 2.5 | 2.0

*Compatible batteries

HM002GZ03
RM 5,575

Cordless Demolition Hammer
Pemahat Tukul Tanpa Kord
充电式电动槌



*Recommended batteries 4.0Ah, 5.0Ah



- **Anti-Vibration Technology (AVT) ensures extra-low vibration performance**

Standard Equipment: Bull Point (A-80787), Bit Grease (194683-7), Side Handle, Cloth

- GZ03: Without Charger & Battery

Impact Energy Kekuatan Impak 单次最大锤击力	EPTA-Procedure 05/2009: 20.9J
Impacts Per Minute (IPM) Impak Per Minit 冲击数	950 - 1,900
Shank Diameter Diameter Shank 柄直径	18mm (11/16")
Dimensions (L x W x H) Dimensi 体积	574x146x324mm (22-5/8x5-3/4x12-3/4")
Net Weight Berat Bersih 淨重	12.0 - 13.3kg (26.5 - 29.3lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	28.3 kg with BL4040 x2 Concrete Grade 40N/mm²

XGT | BL MOTOR | XPT | AVT | SOFT NO LOAD | AWS

HR006GZ 52mm (2-1/16")
RM 8,002

Cordless Rotary Hammer
Tukul Putar Tanpa Kord
充电式电钻



*Recommended batteries 4.0Ah, 5.0Ah



- **Powerful BL motor delivers 21.4J of impact energy to handle the most demanding applications**

Standard Equipment: Side Handle, Side Grip, Depth Gauge, Bit Grease, Cloth

- GZ: Without Charger & Battery

Impact Energy Kekuatan Impak 单次最大锤击力	EPTA-Procedure 05/2009: 21.4J
Capacity Kapasiti 能力	Concrete (TCT Bit): 52mm (2-1/16") Concrete (Core Bit): 160mm (6-5/16")
Impacts Per Minute (IPM) Impak Per Minit 冲击数	1,100 - 2,250
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	150 - 310
Dimensions (L x W x H) Dimensi 体积	610x140x337mm (24x5-1/2x13-1/4")
Net Weight Berat Bersih 淨重	12.9 - 14.3kg (28.4 - 31.5lbs.)

XGT | BL MOTOR | XPT | AVT | SOFT NO LOAD | AWS | AFT

HM001GM202 | HM001GZ
RM 6,070 | RM 2,898

Cordless Demolition Hammer
Pemahat Tukul Tanpa Kord
充电式电动槌



*Recommended batteries 4.0Ah, 5.0Ah



- **Anti-Vibration Technology (AVT) ensures extra-low vibration performance**

Standard Equipment: Bit Grease (194683-7), Side Grip, Cloth

- GM202: 1x Fast Charger, 2x 4.0Ah Battery
- GZ: Without Charger & Battery

Impact Energy Kekuatan Impak 单次最大锤击力	EPTA-Procedure 05/2009: 9.4J
Impacts Per Minute (IPM) Impak Per Minit 冲击数	0 - 2,650
Shank Diameter Diameter Shank 柄直径	18mm (11/16")
Dimensions (L x W x H) Dimensi 体积	481x113x258mm (19x4-7/16x10-1/8")
Net Weight Berat Bersih 淨重	6.3 - 7.1kg (13.9 - 15.7lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	13.6 kg with BL4040 Concrete Grade 40N/mm²

HM001G VIDEO CLIP Models and specs may vary by country

XGT | BL MOTOR | XPT | AVT | SOFT NO LOAD | AWS

HR005GM201 | HR005GZ 40mm (1-9/16")
RM 8,258 | RM 5,085

Cordless Rotary Hammer
Tukul Putar Tanpa Kord
充电式电钻



*Recommended batteries 2.0Ah, 2.5Ah, 4.0Ah, 5.0Ah



- **Auto-start Wireless System (AWS) connects to compatible vacuum cleaners with Bluetooth**

Standard Equipment: Side Handle, Side Grip, Depth Gauge, Bit Grease, Cloth

- GM201: 1x Fast Charger, 2x 4.0Ah Battery
- GZ: Without Charger & Battery

Impact Energy Kekuatan Impak 单次最大锤击力	EPTA-Procedure 05/2009: 8J
Capacity Kapasiti 能力	Concrete (w/ TCT Bit): 40mm (1-9/16")
Impacts Per Minute (IPM) Impak Per Minit 冲击数	1,450 - 2,900
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	250 - 500
Dimensions (L x W x H) Dimensi 体积	484x117x285mm (19x4-5/8x11-1/4")
Net Weight Berat Bersih 淨重	7.5 - 8.0kg (16.5 - 17.6lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	16 holes with BL4040 Concrete Grade 40N/mm² ø20mm x 140mm depth

XGT | BL MOTOR | XPT | AVT | SOFT NO LOAD | AWS | AFT

HR001GM201 28mm (1-1/8")
RM 5,833

Cordless Combination Hammer
Tukul Kombinasi Tanpa Kord
充电式冲击钻锤



3 modes | *Recommended batteries 2.0Ah, 2.5Ah, 4.0Ah



- **Auto-start Wireless System (AWS) connects to vacuum cleaner with Bluetooth**

HR001G VIDEO CLIP Models and specs may vary by country

Standard Equipment: Side Grip, Depth Gauge, Cloth, Grease Vessel (194683-7)

- GM201: 1x Fast Charger, 2x 4.0Ah Battery, 1x Makpac Connector Box

Impact Energy Kekuatan Impak 单次最大锤击力	EPTA-Procedure 05/2009: 2.8J Our experimental conditions: 3.2J
Capacity Kapasiti 能力	Concrete: 28mm(1-1/8") | Steel: 13mm(1/2") | Wood: 32mm(1-1/4") | Core Bit: 54mm(2-1/8") | Diamond Core Bit (Dry Type): 65mm (2-9/16")
Impact Per Minute (IPM) Impak Per Minit 冲击数	0 - 5,000
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	0 - 980
Dimensions (L x W x H) Dimensi 体积	358x102x232mm (14-1/8"x4"x9-1/8")
Net Weight Berat Bersih 淨重	3.9 - 4.6kg (8.6 - 10.1lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	138 holes with BL4040 Concrete Grade 40N/mm² ø10.5mm x 60mm depth

XGT | BL MOTOR | XPT | AVT | SOFT NO LOAD | AFT | AWS

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。


40V max Li-ion XGT

Li-ion Ah 5.0 | 4.0 | 2.5 | 2.0

*Compatible batteries

HR002GM201 28mm (1-1/8")
RM 6,180

Cordless Combination Hammer
Tukul Kombinasi Tanpa Kord
充电式冲击钻锤



3 modes | T | T | T *Recommended batteries 2.0Ah, 2.5Ah, 4.0Ah



- **Quick change chuck for SDS-plus can be easily exchanged for Quick change drill chuck**

Standard Equipment: Side Grip, Depth Gauge, Cloth, Grease Vessel (194683-7), Drill Chuck (199139-5)


- GM201: 1x Fast Charger, 2x 4.0Ah Battery, 1x Makpac Connector Box

XGT BL MOTOR XPT AVT SOFT NO LOAD AFT AWS

Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 2.9J**
Capacity Kapasiti 能力	**Concrete: 28mm(1-1/8") | Steel: 13mm(1/2") | Wood: 32mm(1-1/4") | Core Bit: 54mm(2-1/8") | Diamond Core Bit (Dry Type): 65mm (2-9/16")**
Impact Per Minute (IPM) Impak Per Minit 冲击数	**0 - 5,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 980**
Dimensions (L x W x H) Dimensi 体积	**389x102x232mm (15-1/4"x4"x9-1/8")**
Net Weight Berat Bersih 淨重	**4.1 - 4.6kg (9.0 - 10.1lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**138 holes with BL4040 Concrete Grade 40N/mm² ø10.5mm x 60mm depth**

HR003GM201 | HR003GZ 28mm (1-1/8")
HR003GM201 RM 5,397 | HR003GZ RM 2,223

Cordless Combination Hammer
Tukul Kombinasi Tanpa Kord
充电式冲击钻锤



3 modes | T | T | T *Recommended batteries 2.0Ah, 2.5Ah, 4.0Ah



- **3-mode operation for "Rotation Only", "Hammering with Rotation" or "Hammering Only"**

Standard Equipment: Side Grip, Depth Gauge

- GM201: 1x Fast Charger, 2x 4.0Ah Battery
- GZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

XGT BL MOTOR XPT AVT

Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 2.8J Our experimental conditions: 3.2J**
Capacity Kapasiti 能力	**Concrete: 28mm(1-1/8") | Steel: 13mm(1/2") | Wood: 32mm(1-1/4") | Core Bit: 54mm(2-1/8") | Diamond Core Bit (Dry Type): 65mm (2-9/16")**
Impact Per Minute (IPM) Impak Per Minit 冲击数	**0 - 5,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 980**
Dimensions (L x W x H) Dimensi 体积	**358x121x232mm (14-1/8"x4-3/4"x9-1/8")**
Net Weight Berat Bersih 淨重	**3.9 - 4.6kg (8.6 - 10.1lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**138 holes with BL4040 Concrete Grade 40N/mm² ø10.5mm x 60mm depth**

HR007GM201 | HR007GZ 28mm (1-1/8")
HR007GM201 RM 5,502 | HR007GZ RM 2,330

Cordless Combination Hammer
Tukul Kombinasi Tanpa Kord
充电式冲击电钻电锤



3 modes | T | T | T *Recommended batteries 2.0Ah, 2.5Ah, 4.0Ah



- **3-mode operation;"rotation only", "hammering with rotation" and "hammering only"**

NEW BARU 新

ACCESSORIES (Optional)

DX15 Dust Extraction System Part No. 191X39-9

Standard Equipment: Side Grip, Depth Gauge, Cloth, Grease vessel, Air Duct Cap

- GM201: 1x Fast Charger, 2x 4.0Ah Battery
- GZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

XGT BL MOTOR XPT AVT AWS AFT

Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 3.0J**
Capacity Kapasiti 能力	**Masonry: 28mm (1-1/8") | Steel: 13mm (1/2") | Wood: 32mm (1-1/4") | Core Bit: 54mm (2-1/8") | Diamond Core Bit: 65mm (2-9/16")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 5,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 980**
Dimensions (L x W x H) Dimensi 体积	**458x101x234mm (18x4x9-1/4")**
Net Weight Berat Bersih 淨重	**3.8 - 4.8kg (8.4 - 10.6lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**118 holes with BL4040 Concrete Grade 40N/mm² ø10.5mm x 60mm depth**

DF001GD201 | DF001GZ 13mm (1/2")
DF001GD201 RM 4,557 | DF001GZ RM 1,750

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



*Recommended batteries 2.0Ah, 2.5Ah, 4.0Ah, 5.0Ah



DF001G

VIDEO CLIP Models and specs may vary by country

- **Excellent performance in continuous heavy duty applications**

Standard Equipment: Side Grip, Belt Clip, (+)(-) Bit, Bit Holder

- GD201: 1x Fast Charger, 2x 2.5Ah Battery, 1x Makpac Connector Box
- GZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

XGT BL MOTOR XPT AFT

Capacity Kapasiti 能力	**Steel: 20mm (13/16") | Wood (Auger-Bit): 50mm (2") | Wood (Self-Feed Bit): 76mm (3") | Wood (Hole Saw): 152mm (6") | Siding Board: 220mm (8-5/8")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16" - 1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 2,600 | Low: 0 - 650**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**Hard: 140N·m (1,240in.lbs.) | Soft: 68N·m (600 in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**125N·m (1,100in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**181x86x275mm (7-1/8"x3-3/8"x10-7/8")**
Net Weight Berat Bersih 淨重	**2.7 - 3.0kg (5.9 - 6.6lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**480 holes with BL4025 Drilled 38mm SPF with 7/8" Auger Bit (High Speed)**

DF002GD201 | DF002GA201 | DF002GZ 13mm (1/2")
DF002GD201 RM 3,892 | DF002GA201 RM 3,035 | DF002GZ RM 1,085

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



*Recommended batteries 2.0Ah, 2.5Ah, 4.0Ah



- **BL motor is electronically controlled to optimize battery energy use for longer run time per charge**

Standard Equipment: (+)(-) Bit, Belt Clip

- GD201: 1x Fast Charger, 2x 2.5Ah Battery, 1x Makpac Connector Box
- GA201: 1x Standard Charger, 2x 2.0Ah Battery, 1x Makpac Connector Box
- GZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

XGT BL MOTOR XPT

Capacity Kapasiti 能力	**Steel: 13mm (1/2") Wood (Auger Bit): 38mm (1-1/2") Wood (Hole Saw): 51mm (2")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16" - 1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 2,200 | Low: 0 - 600**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**Hard: 64N·m (570in.lbs.) | Soft: 30N·m (270in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**65N·m (580in.lbs.)**
Clutch Torque Setting Tetapan Pemutaran 扭转设置	**1.0 - 5.0N·m (9 - 44in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**164x86x272mm (6-1/2x3-3/8x10-3/4")**
Net Weight Berat Bersih 淨重	**1.9 - 2.5kg (4.2 - 5.5lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**990 holes with BL4025 30mm thick melapi with ø15mm Auger Bit (High Speed)**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

40Vmax Li-ion XGT

Li-ion Ah 5.0 | 4.0 | 2.5 | 2.0

*Compatible batteries

HP001GD201 | HP001GZ 13mm (1/2")

HP001GD201 RM 4,612 | HP001GZ RM 1,805

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



*Recommended batteries 2.0Ah, 2.5Ah, 4.0Ah, 5.0Ah



HP001G

VIDEO CLIP
Models and specs may vary by country

- **Excellent performance in continuous heavy duty applications**

Standard Equipment: Depth Gauge, Side Grip, Belt Clip, (+)(-) Bit, Bit Holder

- GD201: 1x Fast Charger, 2x 2.5Ah Battery, 1x Makpac Connector Box
- GZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model


XGT BL MOTOR XPT AFT

Capacity Kapasiti 能力	**Steel: 20mm (13/16") | Wood (Auger-Bit): 50mm (2") | Wood (Self-Feed Bit): 76mm (3") | Wood (Hole Saw): 152mm (6") | Siding Board: 220mm (8-5/8") | Masonry: 20mm (13/16")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16" - 1/2")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High: 0 - 39,000 | Low: 0 - 9,750**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 2,600 | Low: 0 - 650**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**Hard: 140N·m (1,240in.lbs.) | Soft: 68N·m (600 in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**125N·m (1,100in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**182x86x275mm (7-1/8"x3-3/8"x10-7/8")**
Net Weight Berat Bersih 淨重	**2.7 - 3.0kg (6.0 - 6.6lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**480 holes with BL4025 Drilled 38mm SPF with 7/8" Auger Bit (High Speed)**

HP002GD201 | HP002GA201 | HP002GZ 13mm (1/2")

HP002GD201 RM 3,947 | HP002GA201 RM 3,090 | HP002GZ RM 1,140

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



*Recommended batteries 2.0Ah, 2.5Ah, 4.0Ah, 5.0Ah



- **Variable 2-speed (0-600 & 0-2,200 RPM) for a wide range of drilling, fastening and hammer drilling applications**

Standard Equipment: (+)(-) Bit, Belt Clip

- GD201: 1x Fast Charger, 2x 2.5Ah Battery, 1x Makpac Connector Box
- GA201: 1x Standard Charger, 2x 2.0Ah Battery, 1x Makpac Connector Box
- GZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

XGT BL MOTOR XPT

Capacity Kapasiti 能力	**Steel: 13mm (1/2") | Wood (Auger Bit): 38mm (1-1/2") Wood (Hole Saw): 51mm (2") | Masonry: 13mm (1/2")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16" - 1/2")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High: 0 - 33,000 | Low: 0 - 9,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 2,200 | Low: 0 - 600**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**Hard: 64N·m (570in.lbs.) | Soft: 30N·m (270in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**65N·m (580in.lbs.)**
Clutch Torque Setting Tetapan Pemutaran 扭转设置	**1.0 - 5.0N·m (9 - 44in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**174x86x272mm (6-7/8x3-3/8x10-3/4")**
Net Weight Berat Bersih 淨重	**2.0 - 2.6kg (4.4 - 5.7lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**990 holes with BL4025 30mm thick melapi with ø15mm Auger Bit (High Speed)**

Cordless Angle Drill
Gerudi Sudut Tanpa Kord 充电式角向电钻



Net Weight
Berat Bersih 淨重
5.9kg
with BL4040 4.0Ah Battery

Front handle
Pemegang hadapan
前手柄

Keyed Drill Chuck
Capacity of drill chuck: 2-13mm (1/16" - 1/2")

Key holder
Pemegang kunci chuck
卡盘键固定座

*Jumlah Kerja 工作量
Work Amount with BL4040
four layers of SPF2x10 plate, ø7/8" Auger bit, high speed mode
100pcs
(approx.)

Mechanical 2-speed
1 Low speed (0- 400 min⁻¹)
2 High speed (0- 1,500 min⁻¹)

Twin LED job light with preglow and afterglow functions
Lampu kerja dual LED dengan fungsi pre-glow dan afterglow
双LED工作灯具有预辉光和余辉功能

DA001GZ 13mm (1/2")

RM 3,790

Cordless Angle Drill
Gerudi Sudut Tanpa Kord
充电式角向电钻



*Recommended batteries 2.5Ah, 4.0Ah, 5.0Ah



- **Powerful drilling even large diameter holes**

Standard Equipment:
Chuck Key, Chuck Key Holder, Handle Set (191R81-4), Hex Wrench, Hook

- GZ: Without Charger & Battery

XGT BL MOTOR XPT ADT

Capacity Kapasiti 能力	**Steel: 13mm (1/2") Wood (Self-Feed Bit) Hi: 65mm (2-9/16") Wood (Self-Feed Bit) Lo: 118mm (4-5/8") Wood (Hole Saw) Hi: 105mm (4-1/8") Wood (Hole Saw) Lo: 159mm (6-1/4") Wood (Auger-Bit): 50mm (2")**
Chuck Capacity Kapasiti Chuck 夹头能力	**2 - 13mm (1/16 - 1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,500 | Low: 0 - 400**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**High: 55N·m (487in.lbs.) | Low: 136N·m (1,210in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**539x128x199mm (21-1/4x5x7-7/8")**
Net Weight Berat Bersih 淨重	**5.3 - 6.2kg (11.7 - 13.7lbs.)**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

40Vmax Li-ion XGT

Li-ion Ah 5.0 | 4.0 | 2.5 | 2.0

*Compatible batteries

TD001GD201 | TD001GZ

RM 4,303 | RM 1,495

Cordless Impact Driver

Pemutar Skru Impak Tanpa Kord

充电式冲击螺丝起子机



*Recommended batteries 2.0Ah, 2.5Ah, 4.0Ah



TD001G

VIDEO CLIP

Models and specs may vary by country

- 4-speed power selection plus 6 Assist modes (2 T-modes, 1 Wood mode, 3 Bolt modes)

Standard Equipment: Belt Clip

- GD201: 1x Fast Charger, 2x 2.5Ah Battery, 1x Makpac Connector Box
- GZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

XGT BL MOTOR XPT

Capacity Kapasiti 能力	**Machine Screw: M4 - M8 (5/32" - 5/16") Standard Bolt: M5 - M16 (3/16" - 5/8") High Strength Bolt: M5 - M14 (3/16" - 9/16") Coarse thread (in length): 22 - 125 mm (7/8" - 4-7/8")**
Hex Shank Batang Heksagon 六角柄	**6.35 mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Max / Hard / Med / Soft / Wood / Bolt (1) / Bolt (2) / Bolt (3) / T (1) / T (2) mode: 0 - 3,700 / 3,200 / 2,100 / 1,100 / 1,800 / 2,500 / 3,700 / 3,700 / 2,400 / 3,700**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Max / Hard / Med / Soft / Wood / Bolt (1) / Bolt (2) / Bolt (3) / T (1) / T (2) mode: 0 - 4,400 / 3,600 / 2,600 / 1,100 / 4,400 / N/A / 4,400 / 4,400 / N/A / 2,600**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**220N·m (1,950in.lbs.)**
Fastening Torque Tenaga Pemutaran Pengancing 扭力	**Hard: 170N·m(1,510in.lbs.) | Med: 50N·m(440in.lbs.) | Soft: 20N·m (180in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**120x86x245mm (4-3/4"x3-3/8"x9-5/8")**
Net Weight Berat Bersih 净重	**1.7 - 2.0kg (3.7 - 4.4lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**800 pcs with BL4025 Coarse thread screws 65mm**

TW001GM201 | TW001GZ 19mm (3/4")

RM 5,907 | RM 2,735

Cordless Impact Wrench

Perengkuh Impak Tanpa Kord

充电式冲击套筒扳手



*Recommended batteries 2.0Ah, 2.5Ah, 4.0Ah



C ring

- Higher torque but compact overall length for easy handling and control

ACCESSORIES (Optional)



Extension Handle Set Part No. 191G67-2

TW001G

VIDEO CLIP

Models and specs may vary by country

Standard Equipment: Belt Clip

- GM201: 1x Fast Charger, 2x 4.0Ah Battery
- GZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

XGT BL MOTOR XPT

Fastening Capacities Kapasiti 紧固能力	**Standard Bolt: M12 - M36 (1/2" - 1-7/16") High Strength Bolt: M10 - M27 (3/8" - 1-1/16")**
Square Drive Batang Segi Empat 四方头	**19mm (3/4"), C-ring**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Max: 0 - 1,800 | Hard: 1,400 | Mid: 1,150 | Soft: 950**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Max: 0 - 2,500 | Hard: 2,400 | Mid: 2,200 | Soft: 1,900**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**1,800N·m (1,330ft.lbs.)**
Nut-Busting Torque Tork Pembongkaran Maksimum 最大拆卸扭力	**2,050N·m (1,510ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**217x94x297mm (8-1/2"x3-11/16"x11-3/4")**
Net Weight Berat Bersih 净重	**3.9 - 4.2kg (8.6 - 9.3lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**870pcs with BL4040 x2 Tightening of M24 bolts**

TW007GM204 | TW007GD202 | TW007GZ02 12.7mm (1/2")

RM 5,123 | RM 4,758 | RM 1,950


Cordless Impact Wrench

Perengkuh Impak Tanpa Kord

充电式冲击套筒扳手



*Recommended batteries 2.0Ah, 2.5Ah, 4.0Ah



C ring

- 3 modes of reaction time for automatic stop available both in forward and reverse rotation modes

Standard Equipment:
Belt Clip, Ring Set with Shoulder Belt

- GM204 : 1x Fast Charger, 2x 4.0Ah Battery, 1x Makpac Connector Box
- GD202 : 1x Fast Charger, 2x 2.5Ah Battery, 1x Makpac Connector Box
- GZ02 : Without Charger & Battery

NEW BARU 新

ACCESSORIES (Optional)



Extension Handle Set Part No. 191G67-2

*Not applicable for Z model

XGT BL MOTOR XPT

Fastening Capacities Keupayaan Pengancing 紧固能力	**Standard Bolt: M10 - M24 (3/8 - 1") High Strength Bolt (Grade 10.9): M10 - M16 (3/8 - 5/8") High Strength Bolt (Grade F10T): M12, M16 (7/16, 5/8")**
Square Drive Skru Persegi 方形螺杆	**12.7mm (1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Max: 0 - 2,300 | Hard: 0 - 1,900 | Mid: 0 - 1,200 | Soft: 0 - 600**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Max: 0 - 2,900 | Hard: 0 - 2,700 | Mid: 0 - 1,900 | Soft: 0 - 1,200**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**760N·m (560ft.lbs.)**
Nut-Busting Torque Tork Pembongkaran Maksimum 最大拆卸扭力	**1,100N·m (810ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**170x86x285mm (6-11/16x3-3/8x11-1/4")**
Net Weight Berat Bersih 净重	**2.7 - 3.3kg (6.0 - 7.3lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**460pcs with BL4040 x2 Tightening of M16 bolts**

TW008GZ 12.7mm (1/2")

RM 1,950

Cordless Impact Wrench

Perengkuh Impak Tanpa Kord

充电式冲击套筒扳手



*Recommended batteries 2.0Ah, 2.5Ah, 4.0Ah



Pin detent

- 3 modes of reaction time for automatic stop available both in forward and reverse rotation modes

NEW BARU 新

ACCESSORIES (Optional)



Extension Handle Set Part No. 191G67-2

Standard Equipment: Belt Clip

- GZ: Without Charger & Battery

XGT BL MOTOR XPT

Fastening Capacities Keupayaan Pengancing 紧固能力	**Standard Bolt: M10 - M24 (3/8 - 1") High Strength Bolt (Grade 10.9): M10 - M16 (3/8 - 5/8") High Strength Bolt (Grade F10T): M12, M16 (7/16, 5/8")**
Square Drive Skru Persegi 方形螺杆	**12.7mm (1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Max: 0 - 2,300 | Hard: 0 - 1,900 | Mid: 0 - 1,200 | Soft: 0 - 600**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Max: 0 - 2,900 | Hard: 0 - 2,700 | Mid: 0 - 1,900 | Soft: 0 - 1,200**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**760N·m (560ft.lbs.)**
Nut-Busting Torque Tork Pembongkaran Maksimum 最大拆卸扭力	**1,100N·m (810ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**170x86x285mm (6-11/16x3-3/8x11-1/4")**
Net Weight Berat Bersih 净重	**2.7 - 3.3kg (6.0 - 7.3lbs.)**

TW005GD201 | TW005GZ 12.7mm (1/2")

RM 4,463 | RM 1,655

Cordless Impact Wrench

Perengkuh Impak Tanpa Kord

充电式冲击套筒扳手



*Recommended batteries 2.0Ah, 2.5Ah, 4.0Ah



Pin detent

- 3 modes of reaction time for automatic stop available both in forward and reverse rotation modes

Standard Equipment: Belt Clip, Tool Hanger Set (191K57-9)

- GD201: 1x Fast Charger, 2x 2.5Ah Battery, 1x Makpac Connector Box
- GZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

XGT BL MOTOR XPT

Fastening Capacities Keupayaan Pengancing 紧固能力	**Standard Bolt: M10 - M20 (3/8 - 3/4") High Strength Bolt: M10 - M16 (3/8 - 5/8")**
Square Drive Skru Persegi 方形螺杆	**12.7mm (1/2"), Pin detent**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Max: 0 - 3,200 | Hard: 2,600 | Medium: 1,800 | Soft: 1,000**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Max: 0 - 4,000 | Hard: 3,400 | Medium: 2,600 | Soft: 1,800**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**350N·m (260ft.lbs.)**
Nut-Busting Torque Tork Pembongkaran Maksimum 最大拆卸扭力	**630N·m (465ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**144x86x248mm (5-5/8x3-3/8x9-3/4")**
Net Weight Berat Bersih 净重	**1.9 - 2.2kg (4.2 - 4.9lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**560pcs with BL4025 x2 Tightening of M16 bolts**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

40V max Li-ion XGT

Li-ion Ah 5.0 4.0 2.5 2.0

*Compatible batteries

Cordless Angle Grinder

Pengisar Sudut Tanpa Kord 充电式角向磨光机



Delivers same power as 1,000W corded grinders

Memberi kuasa yang sama dengan Pengisar Sudut 1,000W

提供与1,000W有线打磨机相同的功率



Shuts down the tool to protect the user, if the rotation speed suddenly slows down

Alat kuasa akan berhenti secara automatic untuk melindungi pengguna jika kelajuan putaran tiba-tiba melambat

若旋转速度突然降低，工具将自动关闭以保护使用者

AFT

Active Feedback Sensing Technology

Teknologi Sensor Maklum Balas Automatik

自动回顾感应科技

Model No. 型号			No Load Speed (rpm) Kelajuan Tanpa Beban 回转数	Switch Suis 开关	BL MOTOR	XPT	AFT	BRAKE	AWS	Anti-restart function Fungsi restart semula 防重启功能
100mm	125mm	150mm								
GA003G	GA005G	GA035G	8,500	Slide	●	●	●	●		●
GA011G	GA013G	GA036G	8,500	Paddle	●	●	●	●		●
GA021G	GA023G	-	3,000 - 8,500	Slide	●	●	●	●	●	●
GA027G	GA029G	-	3,000 - 8,500	Paddle	●	●	●	●	●	●

GA003GM201 | GA003GD201 | GA003GZ 100mm (4")

RM 4,557 | RM 4,193 | RM 1,387

Cordless Angle Grinder

Pengisar Sudut Tanpa Kord

充电式角向磨光机



Top Slide Switch

Suis Gelangsar Atas 顶部滑动开关

Convenient for left & right handed

Mudah diguna dengan tangan kiri atau kanan 方便左右握手

*Recommended batteries 2.5Ah, 4.0Ah, 5.0Ah



- **Excellent in continuous heavy-duty work**

Standard Equipment: Grinding Wheel (A-80852), Wheel Cover, Side Grip, Lock Nut Wrench

- GM201: 1x Fast Charger, 2x 4.0Ah Battery
- GD201: 1x Fast Charger, 2x 2.5Ah Battery
- GZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

XGT BL MOTOR XPT AFT BRAKE

Wheel Diameter Diameter Roda 轮片直径	100mm (4")
Hole Diameter Diameter Lubang 孔直径	16mm (5/8")
Max Wheel Thickness Ketebalan Roda Maksimum 最大轮片厚度	6.4mm (1/4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	8,500
Dimensions (L x W x H) Dimensi 体积	398x117x150mm (15-5/8"x4-5/8"x5-7/8")
Net Weight Berat Bersih 淨重	2.8 - 3.3kg (6.2 - 7.3lbs.)

GA011GM201 | GA011GD201 | GA011GZ 100mm (4")

RM 4,648 | RM 4,283 | RM 1,477

Cordless Angle Grinder

Pengisar Sudut Tanpa Kord

充电式角向磨光机

Paddle Switch

Suis Pemicu 扳机开关

*Recommended batteries 2.5Ah, 4.0Ah, 5.0Ah



- **Genuine solution for high demand industrial applications**

Standard Equipment: Grinding Wheel (A-80852), Wheel Cover, Side Grip, Lock Nut Wrench

- GM201: 1x Fast Charger, 2x 4.0Ah Battery
- GD201: 1x Fast Charger, 2x 2.5Ah Battery
- GZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

XGT BL MOTOR XPT AFT BRAKE

Wheel Diameter Diameter Roda 轮片直径	100mm (4")
Hole Diameter Diameter Lubang 孔直径	16mm (5/8")
Max Wheel Thickness Ketebalan Roda Maksimum 最大轮片厚度	6.4mm (1/4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	8,500
Dimensions (L x W x H) Dimensi 体积	398x117x150mm (15-5/8"x4-5/8"x5-7/8")
Net Weight Berat Bersih 淨重	2.8 - 3.4kg (6.2 - 7.5lbs.)

GA021GM201 | GA021GD201 | GA021GZ 100mm (4")

RM 4,740 | RM 4,375 | RM 1,568

Cordless Angle Grinder

Pengisar Sudut Tanpa Kord

充电式角向磨光机



Top Slide Switch

Suis Gelangsar Atas 顶部滑动开关

Convenient for left & right handed

Mudah diguna dengan tangan kiri atau kanan 方便左右握手

*Recommended batteries 2.5Ah, 4.0Ah, 5.0Ah



- **Auto-start Wireless System (AWS) connects to compatible vacuum cleaners with Bluetooth**

Standard Equipment: Grinding Wheel (A-80852), Wheel Cover, Side Grip, Lock Nut Wrench

- GM201: 1x Fast Charger, 2x 4.0Ah Battery
- GD201: 1x Fast Charger, 2x 2.5Ah Battery
- GZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

XGT BL MOTOR XPT AFT AWS BRAKE

Wheel Diameter Diameter Roda 轮片直径	100mm (4")
Hole Diameter Diameter Lubang 孔直径	16mm (5/8")
Max Wheel Thickness Ketebalan Roda Maksimum 最大轮片厚度	6.4mm (1/4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	3,000 - 8,500
Dimensions (L x W x H) Dimensi 体积	413x117x150mm (16-1/4"x4-5/8"x5-7/8")
Net Weight Berat Bersih 淨重	2.8 - 3.4kg (6.2 - 7.5lbs.)

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

40Vmax Li-ion XGT

Li-ion Ah 5.0 | 4.0 | 2.5 | 2.0

*Compatible batteries

GA027GM201 | GA027GD201 | GA027GZ 100mm (4")

RM 4,832 | RM 4,467 | RM 1,658

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机

Paddle Switch
Suis Pemicu 扳机开关

*Recommended batteries 2.5Ah, 4.0Ah, 5.0Ah



- **Auto-start Wireless System (AWS) connects to compatible vacuum cleaners with Bluetooth**

Standard Equipment: Grinding Wheel (A-80852), Wheel Cover, Side Grip, Lock Nut Wrench

- GM201: 1x Fast Charger, 2x 4.0Ah Battery
- GD201: 1x Fast Charger, 2x 2.5Ah Battery
- GZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

XGT BL MOTOR XPT AFT AWS BRAKE

Wheel Diameter Diameter Roda 轮片直径	100mm (4")
Hole Diameter Diameter Lubang 孔直径	16mm (5/8")
Max Wheel Thickness Ketebalan Roda Maksimum 最大轮片厚度	6.4mm (1/4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	3,000 - 8,500
Dimensions (L x W x H) Dimensi 体积	413x117x150mm (16-1/4"x4-5/8"x5-7/8")
Net Weight Berat Bersih 净重	2.9 - 3.4kg (6.4 - 7.5lbs.)

GA005GM201 | GA005GD201 | GA005GZ 125mm (5")

RM 4,595 | RM 4,230 | RM 1,422

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



Top Slide Switch
Suis Gelangsar Atas 顶部滑动开关
Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan 方便左右握手

*Recommended batteries 2.5Ah, 4.0Ah, 5.0Ah



- **Genuine solution for high demand industrial applications**

Standard Equipment: Grinding Wheel (A-80656), Wheel Cover, Side Grip, Lock Nut Wrench

- GM201: 1x Fast Charger, 2x 4.0Ah Battery
- GD201: 1x Fast Charger, 2x 2.5Ah Battery
- GZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

XGT BL MOTOR XPT AFT BRAKE

Wheel Diameter Diameter Roda 轮片直径	125mm (5")
Hole Diameter Diameter Lubang 孔直径	22.23mm (7/8")
Max Wheel Thickness Ketebalan Roda Maksimum 最大轮片厚度	7.2mm (9/32")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	8,500
Dimensions (L x W x H) Dimensi 体积	398x140x156mm (15-5/8"x5-1/2"x6-1/8")
Net Weight Berat Bersih 净重	2.9 - 3.6kg (6.4 - 7.9lbs.)

GA013GM201 | GA013GD201 | GA013GZ 125mm (5")

RM 4,685 | RM 4,320 | RM 1,513

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



Paddle Switch
Suis Pemicu 扳机开关

*Recommended batteries 2.5Ah, 4.0Ah, 5.0Ah



- **BL motor to run cooler and more efficiently for longer life**

Standard Equipment: Grinding Wheel (A-80656), Wheel Cover, Side Grip, Lock Nut Wrench

- GM201: 1x Fast Charger, 2x 4.0Ah Battery
- GD201: 1x Fast Charger, 2x 2.5Ah Battery
- GZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

XGT BL MOTOR XPT AFT BRAKE

Wheel Diameter Diameter Roda 轮片直径	125mm (5")
Hole Diameter Diameter Lubang 孔直径	22.23mm (7/8")
Max Wheel Thickness Ketebalan Roda Maksimum 最大轮片厚度	7.2mm (9/32")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	8,500
Dimensions (L x W x H) Dimensi 体积	398x140x156mm (15-5/8"x5-1/2"x6-1/8")
Net Weight Berat Bersih 净重	3.0 - 3.6kg (6.6 - 7.9lbs.)

GA013G

VIDEO CLIP
Models and specs may vary by country

GA023GM201 | GA023GD201 | GA023GZ 125mm (5")

RM 4,777 | RM 4,412 | RM 1,605

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



Top Slide Switch
Suis Gelangsar Atas 顶部滑动开关
Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan 方便左右握手

*Recommended batteries 2.5Ah, 4.0Ah, 5.0Ah



- **Auto-start Wireless System (AWS) connects to compatible vacuum cleaners with Bluetooth**

Standard Equipment: Grinding Wheel (A-80656), Wheel Cover, Side Grip, Lock Nut Wrench

- GM201: 1x Fast Charger, 2x 4.0Ah Battery, 1x Makpac Connector Box
- GD201: 1x Fast Charger, 2x 2.5Ah Battery, 1x Makpac Connector Box
- GZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

XGT BL MOTOR XPT AFT AWS BRAKE

Wheel Diameter Diameter Roda 轮片直径	125mm (5")
Hole Diameter Diameter Lubang 孔直径	22.23mm (7/8")
Max Wheel Thickness Ketebalan Roda Maksimum 最大轮片厚度	7.2mm (9/32")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	3,000 - 8,500
Dimensions (L x W x H) Dimensi 体积	413x140x156mm (16-1/4"x5-1/2"x6-1/8")
Net Weight Berat Bersih 净重	3.0 - 4.4kg (6.6 - 9.7lbs.)

GA029GM201 | GA029GD201 | GA029GZ 125mm (5")

RM 4,867 | RM 4,502 | RM 1,695

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



Paddle Switch
Suis Pemicu 扳机开关

*Recommended batteries 2.5Ah, 4.0Ah, 5.0Ah



- **Auto-start Wireless System (AWS) connects to compatible vacuum cleaners with Bluetooth**

Standard Equipment: Grinding Wheel (A-80656), Wheel Cover, Side Grip, Lock Nut Wrench

- GM201: 1x Fast Charger, 2x 4.0Ah Battery
- GD201: 1x Fast Charger, 2x 2.5Ah Battery
- GZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

XGT BL MOTOR XPT AFT AWS BRAKE

Wheel Diameter Diameter Roda 轮片直径	125mm (5")
Hole Diameter Diameter Lubang 孔直径	22.23mm (7/8")
Max Wheel Thickness Ketebalan Roda Maksimum 最大轮片厚度	7.2mm (9/32")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	3,000 - 8,500
Dimensions (L x W x H) Dimensi 体积	413x140x156mm (16-1/4"x5-1/2"x6-1/8")
Net Weight Berat Bersih 净重	3.0 - 4.5kg (6.6 - 9.9lbs.)

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

40V max Li-ion XGT

Li-ion Ah 5.0 4.0 2.5 2.0

*Compatible batteries

GA035GZ 150mm (6")
RM 1,458

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



Top Slide Switch
Suis Gelangsar Atas 顶部滑动开关
Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan 方便左右握手

*Recommended batteries 2.5Ah, 4.0Ah, 5.0Ah



- **Improved heat dissipation capacity of the controller allows for continuous heavy-duty applications**

Standard Equipment: Grinding Wheel (A-80846), Toolless Wheel Cover, Side Grip, Lock Nut Wrench

- GZ: Without Charger & Battery


Wheel Diameter Diameter Roda Pengisar 砂轮片直径	150mm (6")
Hole Diameter Diameter Lubang 孔直径	22.23mm (7/8")
Max Wheel Thickness Ketebalan Roda Maksimum 最大轮片厚度	6.4mm (1/4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	8,500
Dimensions (L x W x H) Dimensi 体积	398x171x156mm (15-5/8x6-3/4x6-1/8")
Net Weight Berat Bersih 淨重	3.0-4.0kg (6.6-8.8lbs.)

GA035G/GA036G

VIDEO CLIP
Models and specs may vary by country

GA036GZ 150mm (6")
RM 1,550

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



Paddle Switch
Suis Pemicu 扳机开关

*Recommended batteries 2.5Ah, 4.0Ah, 5.0Ah



- **Improved heat dissipation capacity of the controller allows for continuous heavy-duty applications**

Standard Equipment: Grinding Wheel (A-80846), Toolless Wheel Cover, Side Grip, Lock Nut Wrench

- GZ: Without Charger & Battery

Wheel Diameter Diameter Roda Pengisar 砂轮片直径	150mm (6")
Hole Diameter Diameter Lubang 孔直径	22.23mm (7/8")
Max Wheel Thickness Ketebalan Roda Maksimum 最大轮片厚度	6.4mm (1/4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	8,500
Dimensions (L x W x H) Dimensi 体积	398x171x156mm (15-5/8x6-3/4x6-1/8")
Net Weight Berat Bersih 淨重	3.0-4.0kg (6.6-8.8lbs.)

GA035G/GA036G

VIDEO CLIP
Models and specs may vary by country

GA037GT201 | GA037GM201 | GA037GZ 180mm (7")
GA037GT201 RM 5,642 | GA037GM201 RM 5,023 | GA037GZ RM 1,850

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



Paddle Switch
Suis Pemicu 扳机开关

*Recommended batteries 5.0Ah



- **Auto-start Wireless System (AWS) Connects to Compatible Vacuum Cleaners with Bluetooth**

Standard Equipment: Toolless Wheel Cover, Side Grip, Lock Nut Wrench

- GT201: 1x Fast Charger, 2x 5.0Ah Battery
- GM201: 1x Fast Charger, 2x 4.0Ah Battery
- GZ: Without Charger & Battery

*Not applicable for Z model

Wheel Diameter Diameter Roda Pengisar 砂轮片直径	180mm (7")
Hole Diameter Diameter Lubang 孔直径	22.23mm (7/8")
Max Wheel Thickness Ketebalan Roda Maksimum 最大轮片厚度	7.2mm (1/4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	7,800
Dimensions (L x W x H) Dimensi 体积	499x200x180mm (19-5/8x7-7/8x7-1/8")
Net Weight Berat Bersih 淨重	4.4 - 5.2kg (9.7 - 11.0lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	8.0 m with BL4050F Concrete cutting 30mm depth with Diamond Wheel

GA038GT201 | GA038GM201 | GA038GZ 230mm (9")
GA038GT201 RM 5,660 | GA038GM201 RM 5,040 | GA038GZ RM 1,868

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



Paddle Switch
Suis Pemicu 扳机开关

*Recommended batteries 5.0Ah



- **Auto-start Wireless System (AWS) Connects to Compatible Vacuum Cleaners with Bluetooth**

Standard Equipment: Toolless Wheel Cover, Side Grip, Lock Nut Wrench

- GT201: 1x Fast Charger, 2x 5.0Ah Battery
- GM201: 1x Fast Charger, 2x 4.0Ah Battery
- GZ: Without Charger & Battery

*Not applicable for Z model

Wheel Diameter Diameter Roda Pengisar 砂轮片直径	230mm (9")
Hole Diameter Diameter Lubang 孔直径	22.23mm (7/8")
Max Wheel Thickness Ketebalan Roda Maksimum 最大轮片厚度	6.5mm (1/4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	6,600
Dimensions (L x W x H) Dimensi 体积	509x250x164mm (20x9-7/8x6-1/2")
Net Weight Berat Bersih 淨重	4.6 - 7.4kg (10.1 - 16.3lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	5.0 m with BL4050F Concrete cutting 30mm depth with Diamond Wheel

SP001GZ02 165mm (6-1/2")
RM 3,273

Cordless Plunge Cut Saw
Gergaji Piring Tanpa Kord
充电式圆锯



*Recommended batteries 2.5Ah, 4.0Ah, 5.0Ah



NEW 新 BARU

- **High power for fast cutting and ripping**
- **Optional guide rail is attachable without adapter for increased maneuverability**

Standard Equipment: TCT Saw Blade (B-57364), Hex Wrench

- GZ02: With 1x Makpac Connector Box, Without Charger & Battery

Blade Diameter Diameter Bilah 锯片直径	165mm (6-1/2")
Hole Diameter Diameter Lubang 孔直径	20mm (13/16")
Bevel Capacity Kapasiti Bevel 斜角容量	-1 - 48°
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	0°: 56mm (2-3/16") | 45°: 40mm (1-9/16") 48°: 38mm (1-1/2")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	2,500 - 4,900
Dimensions (L x W x H) Dimensi 体积	347x221x271mm (13-5/8x8-3/4x10-5/8")
Net Weight Berat Bersih 淨重	4.4 - 5.0kg (9.7 - 11.0lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	150 cuts Kitchen board (Laminate wood) thickness 40mm x width 600mm 0° cutting

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。


40V max Li-ion XGT

Li-ion Ah 5.0 | 4.0 | 2.5 | 2.0

*Compatible batteries

Cordless Circular Saw

Gergaji Piring Tanpa Kord 充电式圆锯

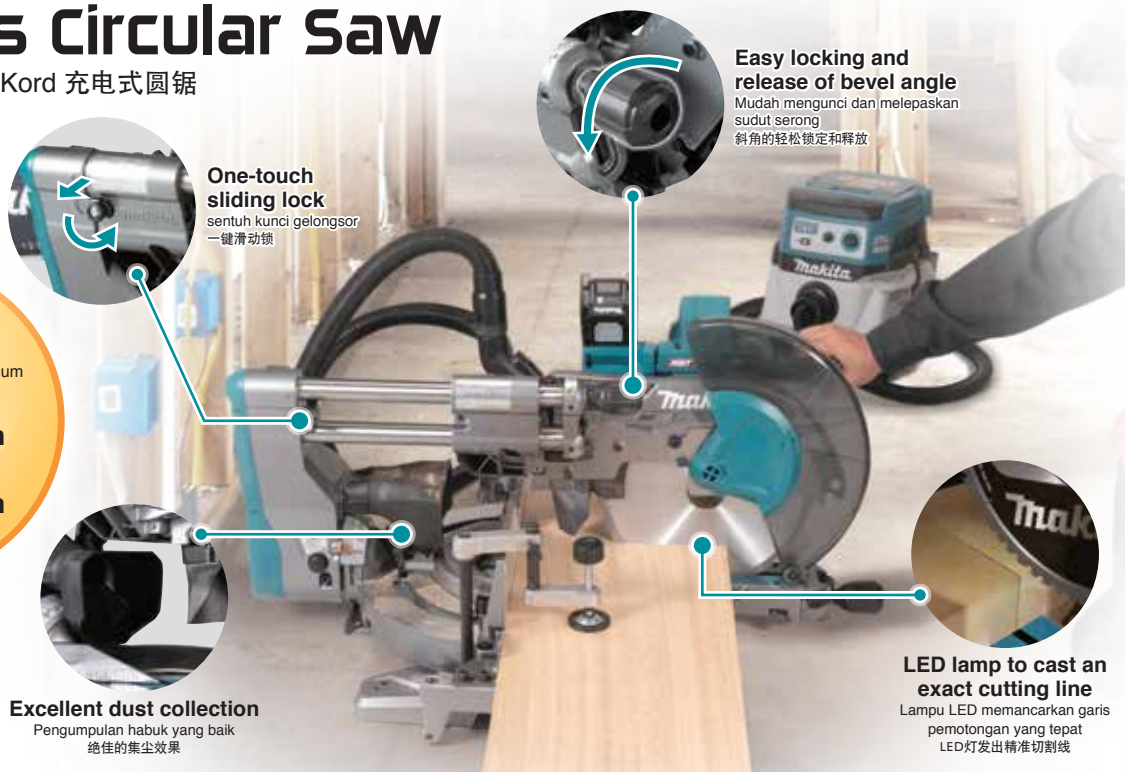

Easy locking and release of bevel angle
Mudah mengunci dan melepaskan sudut serong
斜角的轻松锁定和释放

One-touch sliding lock
sentuh kunci gelongsor
一键滑动锁

Max Cutting Capacity
Kapasiti Pemotongan Maksimum
最大切割能力

92 x 382mm
LS003G

68 x 310mm
LS004G
(height x width)

Excellent dust collection
Pengumpulan habuk yang baik
绝佳的集尘效果

LED lamp to cast an exact cutting line
Lampu LED memancarkan garis pemotongan yang tepat
LED灯发出精准切割线

LS003GZ 305mm (12")

RM 6,252

Cordless Slide Compound Miter Saw
Gergaji Kompaun Miter Tanpa Kord
充电式斜断锯



*Recommended batteries 4.0Ah, 5.0Ah



- **Auto-start Wireless System (AWS) connects to compatible vacuum cleaners with Bluetooth**

NEW BARU 新

Standard Equipment: TCT Saw Blade (B-67452), Dust Bag, Triangular Rule, Vertical Vise, Hex Wrench

- GZ: Without Charger & Battery

XGT BL MOTOR DXT AWS

Blade Diameter Diameter Bilah 锯片直径	305mm (12")
Hole Diameter Diameter Lubang 孔直径	25.4mm (1")
Angle Sudut 角度	Miter: 60°L / 60°R | Bevel: 48°L / 48°R
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	0° Miter: 107x363mm (4-1/4x14-1/4") 45° Miter, L/R: 107x255mm (4-1/4x10")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	3,600
Dimensions (L x W x H) Dimensi 体积	898x690x725mm (35-1/4x27-1/4x28-1/2")
Net Weight Berat Bersih 净重	30.5 - 31.1kg (67.2 - 68.6lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	70 cuts with BL4040 Melapi thickness 90mm x width 300mm at 90° slide cutting

LS004GZ 260mm (10-1/4")

RM 5,450

Cordless Slide Compound Miter Saw
Gergaji Kompaun Miter Tanpa Kord
充电式斜断锯



*Recommended batteries 4.0Ah, 5.0Ah



- **Auto-start Wireless System (AWS) connects to compatible vacuum cleaners with Bluetooth**

NEW BARU 新

Standard Equipment: TCT Saw Blade, Dust Bag, Triangular Rule, Vertical Vise, Hex Wrench

- GZ: Without Charger & Battery

XGT BL MOTOR DXT AWS

Blade Diameter Diameter Bilah 锯片直径	260mm (10-1/4")
Hole Diameter Diameter Lubang 孔直径	25.4mm (1")
Angle Sudut 角度	Miter: 60°L / 60°R | Bevel: 48°L / 48°R
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	0° Miter: 91x279mm (3-5/8x11") 45° Miter, L/R: 91x197mm (3-5/8x7-3/4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	3,600
Dimensions (L x W x H) Dimensi 体积	805x644x660mm (35-1/4x25-3/8x26")
Net Weight Berat Bersih 净重	26.6 - 27.2kg (58.6 - 60.0lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	110 cuts with BL4040 Melapi thickness 60mm x width 300mm at 90° slide cutting

LS002GZ 216mm (8-1/2")

RM 4,903

Cordless Slide Compound Miter Saw
Gergaji Kompaun Miter Tanpa Kord
充电式斜断锯



*Recommended batteries 2.5Ah, 4.0Ah, 5.0Ah



- **Auto-start Wireless System (AWS) connects to compatible vacuum cleaners with Bluetooth**

Standard Equipment: Efficut TCT Saw Blade (E-07010), Dust Bag, Triangular Rule, Vertical Vise, Hex Wrench

- GZ: Without Charger & Battery

XGT BL MOTOR DXT AWS

Blade Diameter Diameter Bilah 锯片直径	216mm (8-1/2")
Hole Diameter Diameter Lubang 孔直径	25.4mm (1")
Angle Sudut 角度	Miter: 60°L / 60°R | Bevel: 48°L / 48°R
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	(Bevel 45°L / Miter 45°LR) 50x220mm (2x8-5/8") (Bevel 45°L / Miter 0°) 50x312mm (2x12-1/4") (Bevel 45°R / Miter 45°LR) 30x220mm (1-3/16x8-5/8") (Bevel 45°R / Miter 0°) 30x312mm (1-3/16x12-1/4") (Bevel 0° / Miter 45°LR) 70x220mm (2-3/4x8-5/8") (Bevel 0° / Miter 0°) 70x312mm (2-3/4x12-1/4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	4,800
Dimensions (L x W x H) Dimensi 体积	702x551x557mm (27-5/8x21-3/4x22")
Net Weight Berat Bersih 净重	16.4 - 17.0kg (36.2 - 37.6lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	170 cuts with BL4040 Melapi thickness 60mm x width 250mmat 90° slide cutting

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

40V max Li-ion XGT

Li-ion Ah 5.0 | 4.0 | 2.5 | 2.0

*Compatible batteries





HS009GT201 | HS009GZ 235mm (9-1/4")

RM 6,855 | RM 3,063

Cordless Circular Saw
Gergaji Piring Tanpa Kord
充电式圆锯



*Recommended batteries 5.0Ah



- **Lightweight & High Power**
- **Directly compatible with guide rail**

NEW BARU 新

Standard Equipment:
TCT Saw Blade (E-01959), Sub Base, Hex Wrench

- GT201: 1x Fast Charger, 2x 5.0Ah Battery
- GZ: Without Charger & Battery

*Not applicable for Z model

XGT BL MOTOR XPT BRAKE AWS

Blade Diameter Diameter Bilah 锯片直径	**235mm (9-1/4")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**0°: 85mm (3-3/8") | 45°: 61mm (2-3/8") | 60°: 44mm (1-3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**4,000**
Dimensions (L x W x H) Dimensi 体积	**413x196x316mm (16-1/4x7-3/4x12-1/2")**
Net Weight Berat Bersih 净重	**5.1 - 5.7kg (11.2 - 12.6lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**120 pcs with BL4050F Sawing with EFFICUT blade 0° cut Oak Wood (thickness 80mm, width 300mm)**

HS004GM201 | HS004GZ 190 / 185mm (7-1/2" / 7-1/4")

RM 5,723 | RM 2,553

Cordless Circular Saw
Gergaji Piring Tanpa Kord
充电式圆锯



*Recommended batteries 4.0Ah, 5.0Ah



- **Lightweight & High Power**

Standard Equipment: TCT Saw Blade (B-62022), Dust Nozzle, Hex Wrench, Guide Rule

- GM201: 1x Fast Charger, 2x 4.0Ah Battery
- GZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model


XGT BL MOTOR XPT ADT AWS BRAKE

Blade Diameter Diameter Bilah 锯片直径	**190mm (7-1/2") | 185mm (7-1/4")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 62.5 / 60 mm (2-7/16" / 2-3/8") 45°: 44.5 / 43 mm (1-3/4" / 1-11/16") 48°: 42 / 41 mm (1-5/8" / 1-5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**6,000**
Dimensions (L x W x H) Dimensi 体积	**322x210x290mm (12-5/8"x8-1/4"x11-3/8")**
Net Weight Berat Bersih 净重	**4.4 - 4.7kg (9.7 - 10.4lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**145pcs Melapi thickness: 60mm, width: 300mm 31pcs SPF 2 x 10 with BL4040**

JR001GM201 | JR001GZ

RM 4,922 | RM 1,750

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯



*Recommended batteries 2.0Ah, 2.5Ah, 4.0Ah



- **Compact & High Power**

Standard Equipment:
Recipro Saw Blades 3pcs (B-05038, B-05044, B-05153)

- GM201: 1x Fast Charger, 2x 4.0Ah Battery
- GZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

XGT BL MOTOR XPT

Length of Stroke Panjang Strok 冲程长度	**32mm (1-1/4")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**High: 0 - 3,000 | Low: 0 - 2,300**
Capacity Kapasiti 能力	**Pipe: 130mm (5-1/8") Wood: 255mm (10")**
Dimensions (L x W x H) Dimensi 体积	**457x88x233mm (18"x3-1/2"x9-1/8")**
Net Weight Berat Bersih 净重	**4.2 - 4.5kg (9.3 - 9.9lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**155cuts with BL4040 SPF 2 x 10**

VIDEO CLIP
Models and specs may vary by country
JR001G

FN001GD101 | FN001GZ

RM 5,577 | RM 3,827

Cordless Brad Nailer
Mesin Pemaku Tanpa Kord
充电式打钉机



*Recommended batteries 2.0Ah, 2.5Ah





- **High power to drive brad nails up to 40mm; 35mm into hard materials such as red oak**

Standard Equipment: Safety Goggles, Nose Adapter, Hex Wrench, Belt Clip

- GD101: 1x Fast Charger, 1x 2.5Ah Battery
- GZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

XGT BL MOTOR XPT

Capacity Kapasiti 能力	**Length: 15 - 40mm (5/8" - 1-5/8") Gauge: 18Ga**
Magazine Capacity Bilangan Staples 装钉个数	**100**
Dimensions (L x W x H) Dimensi 体积	**265x86x243mm (10-3/8x3-3/8x9-9/16")**
Net Weight Berat Bersih 净重	**2.6 - 3.2kg (5.7 - 7.1lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**5000pcs with BL4025 Nail: Length 15-40mm, Gauge 18Ga**

Accessories (optional)

Description	Size	Pcs/ Box	Part No.
Brad Nail 15mm (5/8")	F15	5,000	B-04307
Brad Nail 20mm (3/4")	F20	5,000	B-04313
Brad Nail 25mm (1")	F25	5,000	B-04329
Brad Nail 30mm (1-3/16")	F30	5,000	B-04335
Brad Nail 35mm (1-3/8")	F35	5,000	B-04357

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

40V max Li-ion XGT

Li-ion Ah 5.0 | 4.0 | 2.5 | 2.0

*Compatible batteries

Cordless Dust Blower

Mesin Penghembus Habuk Tanpa Kord 充电式除尘器



Nozzle 13 set
Part No. 191X15-3
• For blow-off works
• For inflating large play pools, etcreach



Nozzle 7 set
Part No. 191X13-7
• For filter cleaningreach



Nozzle 3 set
Part No. 191X11-1
• For cleaning narrow spaces (can be used like an air spray can)



Wide range nozzle set
Part No. 191X19-5
• For wide range blow-off



Easy nozzle replacement without tool
Penggantian muncung mudah tanpa alat
无需工具即可轻松更换喷嘴





Flexible nozzle complete set (Optional)
Part No. 191X21-8
• For blowing dust away from OA equipment or narrow spaces where this machine cannot enter



Long nozzle set (Optional)
Part No. 191X78-9
• For cleaning anchor holes
• For cleaning narrow spaces that are out of reach

Filter C complete set
Part No. 191X29-2
• For use of the machine in a dusty environment



Pinch valve nozzle set
Part No. 191X17-9
• For inflating/deflating inner tubes and beach balls



Rubber attachment 20-30 set (Optional)
Part No. 191X25-0
• For deflation large play pools and inflatable beds etc



Rubber attachment 65 set (Optional)
Part No. 191X27-6
• For deflating futon (bedding) compression bag



Air vent hose complete set (Optional)
Part No. 191X23-4
• For inflating/deflating inner tubes and beach balls

AS001GA105 | AS001GZ03

RM 2,223 | RM 1,022

Cordless Dust Blower

Mesin Penghembus Habuk Tanpa Kord
充电式除尘器



*Recommended batteries 2.0Ah, 2.5Ah, 4.0Ah



NEW BARU 新

• **4 stage air volume; selectable according to your application**

Standard Equipment: Nozzle 3, Nozzle 7, Nozzle 13, Pinch Valve Nozzle, Wide Range Nozzle, Filter C

• GA105 : 1x Standard Charger, 1x 2.0Ah Battery, Accessory Bag, Makita Tool Bag (831253-8)
• GZ03 : Without Charger & Battery

*Not applicable for Z model

XGT BL MOTOR

Max Blowing Force Kekuatan Tiupan Maksimum 最大吹力	**Mode: 4: 2.8N | 3: 2.3N | 2: 1.7N | 1: 1.1N**
Max Air Volume Isipadu Angin Maksimum 最大风量	**Mode: 4: 1.1m³/min | 3: 1.0m³/min | 2: 0.8m³/min | 1: 0.6 m³/min**
Max Sealed Suction Sedutan Terkedap 最大密封吸力	**10.3kPa**
Dimensions (L x W x H) Dimensi 体积	**180x94x248mm (7-1/8x3-11/16x9-3/4")**
Net Weight Berat Bersih 淨重	**1.5 - 2.3kg (3.3 - 5.1 lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Mode: 4: 13 min | 3: 17 min | 2: 25 min | 1: 50 min with BL4025**

Cordless Inflator

Inflator Tanpa Kord 充電式打氣機



MP001G	Light Truck	Car	Tractor	Bicycle	Road Bike	Ball	Beach ball / Swim ring
Valve Shape							
Adapter	American			British	French	For Balls	For Swim rings/ Beach balls
Objects Conditions	Size: 205/70R16 0→600kPa High speed mode	Size: 215/60R16 0→250kPa High speed mode	Size: 7-14 0→180kPa High speed mode	Size: 26 inch 0→300kPa Low speed mode	Size: 700x23C 0→700kPa High speed mode	Size: 700x23C 0→90kPa Ball mode	Size: 30cm High speed mode
Work Speed (approx)	8 min 25 sec	2 min 45 sec	1 min 40 sec	9 sec	17 sec	39 sec	22 sec
Work Amount Battery BL4040	4 times	19 times	32 times	780 times	125 times	310 times	140 times

MP001GZ

RM 1,032

Cordless Inflator

Inflator Tanpa Kord
充电式打气机



*Recommended batteries 2.0Ah, 2.5Ah, 4.0Ah, 5.0Ah



NEW BARU 新

• **Ideal for inflating tires of cars and bicycles, sport balls, and more**

Standard Equipment:
British Adapter, French Adapter, Ball Adapter, Swim Ring Adapter

• GZ: Without Charger & Battery

XGT XPT

Max Air Pressure Udara Tekanan Maksimum 最大气压	**1,110kPa (161 PSI) [11.1 bar]**
Air Discharge Amount Pelepasan Udara 空气排放量	**200kPa: 24L/min | 700kPa: 12L/min**
Hose Length Panjang Hos 软管长度	**65cm (25-1/2")**
Dimensions (L x W x H) Dimensi 体积	**320x108x231mm (12-5/8x4-1/4x9-1/8")**
Net Weight Berat Bersih 淨重	**2.9 - 3.5kg (6.4 - 7.7lbs.)**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

XGT X2 80Vmax | 40Vmax Li-ion | XGT

Li-ion Ah 5.0 | 4.0 | 2.5 | 2.0

*Compatible batteries

UR012GZ02
RM 6,390

Cordless Grass Trimmer
Pemotong Rumput Tanpa Kord
充电式割草机



*Recommended batteries 5.0Ah



- Applicable to heavy-duty operation due to high output power similar to 40mL class engine grass trimmers

Standard Equipment: Safety Goggles, Metal Blade, Nylon Cutting Head, Plastic Blade, Accessory Bag, Hex Wrench, Box Wrench, Shoulder Belt


- GZ02: Without Charger & Battery

XGT | BL MOTOR | ADT AFT | WG WETGUARD

Max Output Keluaran Maksima 最大输出	2,000W
Cutting Width Lebar Keratan 切割宽度	Metal Blade: 305mm (12") Chisel Blade: 225mm (8-7/8") Shredder Blade: 270mm (10-5/8") TCT Saw Blade: 255mm (10") Nylon Cutting Head: 480mm (18-7/8") Plastic Blade: 305mm (12")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	Metal Blade / Plastic Blade (305mm): High: 0 - 6,800 | Mid: 0 - 5,000 | Low: 0 - 3,500 Nylon Cutting Head: High: 0 - 5,000 | Mid: 0 - 4,200 | Low: 0 - 3,500
Spindle Size Saiz Spinde 主轴尺寸	M10 x 1.25LH
Dimensions (L x W x H) Dimensi 体积	1,790x680x590mm (70-1/2x26-3/4x23-1/4")
Net Weight Berat Bersih 淨重	8.0 - 9.3kg (17.6 - 20.5lbs.)
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	Low: 126 min | Med: 84 min | High: 56 min with BL4050F x2 (Metal Blade)

UR007GM101 | UR007GZ01
RM 5,213 | RM 3,282

Cordless Grass Trimmer
Pemotong Rumput Tanpa Kord
充电式割草机



*Recommended batteries 2.5Ah, 4.0Ah, 5.0Ah



- Wet Guard/ IPX4-compatible; High water-resistance allows to operate the machine even if it is wet with water

Standard Equipment: Safety Goggles, Metal Blade, Nylon Cutting Head, Plastic Blade, Accessory Bag, Hex Wrench, Box Wrench, Shoulder Belt


- GM101: 1x Fast Charger, 1x 4.0Ah Battery
- GZ01: Without Charger & Battery

XGT | BL MOTOR | ADT AFT | WG WETGUARD

Max Output Keluaran Maksima 最大输出	1,000W
Cutting Width Lebar Keratan 切割宽度	Metal Blade: 255mm (10") Nylon Cutting Head: 430mm (17") Plastic Blade: 305mm (12")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	Metal Blade / Plastic Blade (305mm): High: 0 - 7,000 | Mid: 0 - 5,500 | Low: 0 - 4,600 Nylon Cutting Head / Plastic Blade (255mm): High: 0 - 5,500 | Mid: 0 - 5,000 | Low: 0 - 4,600
Spindle Size Saiz Spinde 主轴尺寸	M10 x 1.25LH
Dimensions (L x W x H) Dimensi 体积	1,815x396x266mm (71-1/2x15-5/8x10-1/2")
Net Weight Berat Bersih 淨重	5.3 - 5.9kg (11.7 - 13.0lbs.)
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	Low: 32 min | Med: 20 min | High: 16 min with BL4050F (2 tooth Metal Blade)

UR008GM101 | UR008GZ01
RM 4,667 | RM 2,735

Cordless Grass Trimmer
Pemotong Rumput Tanpa Kord
充电式割草机



*Recommended batteries 2.5Ah, 4.0Ah, 5.0Ah



- Wet Guard/ IPX4-compatible; High water-resistance allows to operate the machine even if it is wet with water

Standard Equipment: Safety Goggles, Nylon Cutting Head, Accessory Bag, Hex Wrench

- GM101: 1x Fast Charger, 1x 4.0Ah Battery
- GZ01: Without Charger & Battery

XGT | BL MOTOR | ADT AFT | WG WETGUARD

Max Output Keluaran Maksima 最大输出	1,000W
Cutting Width Lebar Keratan 切割宽度	Nylon Cutting Head: 430mm (17") Plastic Blade: 305mm (12")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	Nylon Cutting Head: High: 0 - 5,000 | Mid: 0 - 4,600 | Low: 0 - 4,000 Plastic Blade (305mm): High: 0 - 6,000 | Mid: 0 - 4,600 | Low: 0 - 4,000
Spindle Size Saiz Spinde 主轴尺寸	M10 x 1.25LH
Dimensions (L x W x H) Dimensi 体积	1,803x224x300mm (71x8-7/8x11-3/4")
Net Weight Berat Bersih 淨重	5.0 - 5.7kg (11.0 - 12.6lbs.)
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	Low: 31 min | Med: 19 min | High: 13 min with BL4050F (Plastic Blade 305mm 12")

UR003GZ
RM 2,533

Cordless Grass Trimmer
Pemotong Rumput Tanpa Kord
充电式割草机

*Recommended batteries 2.5Ah, 4.0Ah, 5.0Ah



- WetGuard; Excellent water-resistant performance

Standard Equipment: Safety Goggle, Blade Cover, Nylon Cutting Head (198892-0), Accessory Bag, Hex Wrench, Shoulder Belt

- GZ: Without Charger & Battery

XGT | BL MOTOR | XPT | ADT AFT | WG WETGUARD

Max Output Keluaran Maksima 最大输出	550W
Cutting Width Lebar Keratan 切割宽度	Metal Blade: 230mm (9") TCT Saw Blade: 255mm (10") Nylon Cutting Head: 350mm (13-3/4") Plastic Blade: 255mm (10")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	High: 0 - 6,500 | Mid: 5,300 | Low: 3,500
Spindle Size Saiz Spinde 主轴尺寸	M10 x 1.25LH
Net Weight Berat Bersih 淨重	3.9 - 4.5kg (8.6 - 9.8lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	290m² of area with BL4050F
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	Low: 92 min | Med: 53 min | High: 31 min with BL4050F (Nylon Cutting Head)

UC004GM101 | UC004GZ 350mm (14")
RM 4,303 | RM 2,370

Cordless Chain Saw
Gergaji Rantai Tanpa Kord
充电式链锯

*Recommended batteries 2.5Ah, 4.0Ah



- High operability similar to engine chain saw

Standard Equipment:
Saw Chain, Guide Bar, Guide Bar Cover, Oil supply, Round File, Box Wrench, Safety Goggles (195246-2)

- GM101: 1x Fast Charger, 1x 4.0Ah Battery
- GZ: Without Charger & Battery

XGT | BL MOTOR | WG WETGUARD

Guide Bar Length Panjang Bar Panduan 导板长度	350mm (14")
Chain Pitch Kerapatan Rantai 链条齿距	3/8"
Chain Gauge Ketebalan Rantai 链条厚度	1.1mm (0.043")
Chain Speed Kelajuan Rantai 链条速度	0 - 24.8m/s (0 - 1,490m/min) (0 - 4,880FPM)
Oil Tank Capacity Tangki Minyak Pelincir 链油箱	200mL
Dimensions (L x W x H) Dimensi 体积	266x194x227mm (10-1/2x7-5/8x8-15/16")
Net Weight Berat Bersih 淨重	3.8 - 4.7kg (8.4 - 10.4lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	160 cuts with BL4040 & 90PX chain Cutting 100 x 100mm Cedar square timber

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

40V max Li-ion XGT

Li-ion Ah 5.0 | 4.0 | 2.5 | 2.0

*Compatible batteries


UA004GM102 | UA004GZ01

RM 5,778 | RM 3,847

Cordless Telescopic Pole Saw

Gergaji Rantai Teleskopik Tanpa Kord

充电式无刷伸缩式高枝链锯



*Recommended batteries 4.0Ah, 5.0Ah



- **High power BL motor delivers the same or higher operation efficiency than 35 mL class engine models**

Standard Equipment:
Saw Chain, Guide Bar, Guide Bar Case, Wrench, Hex Wrench, Band Assembly, Round File & File Guide Set, Safety Goggles (195246-2), Chain Oil

- GM102: 1x Fast Charger, 1x 4.0Ah Battery
- GZ01: Without Charger & Battery

Max Output Keluaran Maksima 最大输出	**1,500W**
Guide Bar Length Panjang Bar Panduan 导板长度	**300mm (12")**
Saw Chain Rantai 链条	**Gauge: 1.1 - 1.3mm (0.043 - 0.050") Pitch: 3/8"**
Chain Speed Kelajuan Rantai 链条速度	**0 - 20m/s (0 - 1,200m/min) (3,940FPM)**
Oil Tank Capacity Tangki Minyak Pelincir 链油箱	**160mL**
Dimensions (L x W x H) Dimensi 体积	**2,516-3,748x156x187mm (99-147-1/2x6-1/8x7-3/8")**
Net Weight Berat Bersih 淨重	**7.8 - 9.1kg (17.2 - 20.1lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**153 cuts with BL4040 100 x 100mm Cedar square timber**


UA003GM102 | UA003GZ01

RM 4,995 | RM 3,063


Cordless Pole Saw

Gergaji Rantai Teleskopik Tanpa Kord

充电式无刷高枝链锯



*Recommended batteries 4.0Ah, 5.0Ah

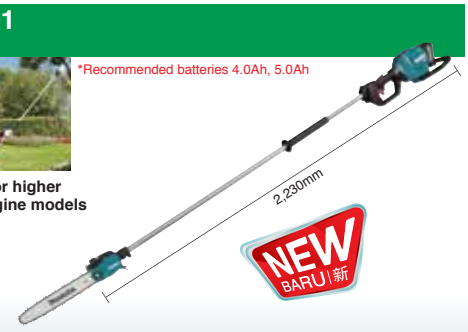

- **High power BL motor delivers the same or higher operation efficiency than 35 mL class engine models**

Standard Equipment:
Saw Chain, Guide Bar, Guide Bar Case, Wrench, Band Assembly, Round File & File Guide Set, Safety Goggles (195246-2), Chain Oil

- GM102: 1x Fast Charger, 1x 4.0Ah Battery
- GZ01: Without Charger & Battery

Max Output Keluaran Maksima 最大输出	**1,500W**
Guide Bar Length Panjang Bar Panduan 导板长度	**300mm (12")**
Saw Chain Rantai 链条	**Gauge: 1.1 - 1.3mm (0.043 - 0.050") Pitch: 3/8"**
Chain Speed Kelajuan Rantai 链条速度	**0 - 20m/s (0 - 1,200m/min) (3,940FPM)**
Oil Tank Capacity Tangki Minyak Pelincir 链油箱	**160mL**
Dimensions (L x W x H) Dimensi 体积	**2,230x156x187mm (88x6-1/8x7-3/8")**
Net Weight Berat Bersih 淨重	**6.1 - 7.4kg (13.4 - 16.3lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**153 cuts with BL4040 100 x 100mm Cedar square timber**

Cordless Multi Function Power Head


Powerhead Pelbagai Fungsi Tanpa Kord

充电式多功能动力机

BL MOTOR — Motor tanpa berus 无碳刷马达

XPT EXTREME PROTECTION TECHNOLOGY — Teknologi Perlindungan Ekstrim 防尘防水滴技术

AFT — Active Feedback Sensing Technology Teknologi Sensor Maklum Balas Automatik 自动回馈感应科技

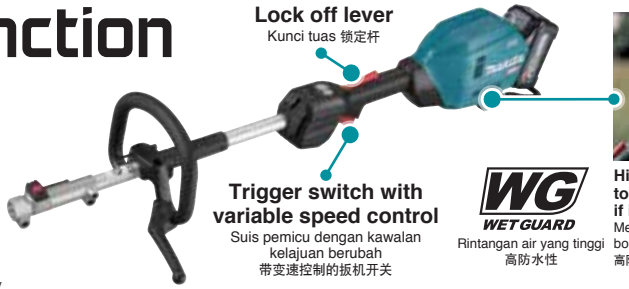



High water-resistance allows to operate the machine even if it is wet with water
Mesin dengan rintanga air yang tinggi boleh beroperasi walaupun basah
高防水性机器即使被水弄湿也能运行

WG WET GUARD — Rintangan air yang tinggi 高防水性

Brushcutter
Mesin potong rumput 割草器
EM400MP Part No. 195657-1
*EM403MP Part No. 198760-7
*UX01G / DUX60 only

Grass Trimmer
Mesin potong rumput 割草器
EM408MP Part No. 191N34-9
EM409MP Part No. 191N46-2

Power brush
Pembersih berus 毛刷清扫器
BR400MP
Part No. 199323-2

Power sweep
Penyapu lantai 地面扫除器
SW400MP
Part No. 199344-4

Coffee harvester
Penuai Kopi 咖啡豆采收器
EJ400MP
Part No. 197163-2

Pole saw
Batang gergaji 高枝链锯
EY401MP Part No. 199925-4
EY403MP Part No. 191T41-8

Edger
Kemasan tepi 草坪修边机具
EE400MP
Part No. 196752-0

Rotary scissors
Mesin potong rumput 割草器
EM407MP
Part No.191M57-1

Ground trimmer
Pemangkas tanaman 地面修剪器
EN420MP (Angle adjustable)
Part No. 198061-3

Blower
Penghembus angin 吹风机组
UB400MP Part No. 191F68-4
UB401MP Part No. 191P75-7

Hedge trimmer
Pemangkas tanaman 篱笆修剪器
EN410MP (Straight)
Part No. 197742-6

Pole hedge trimmer
Pemangkas tanaman 篱笆修剪器
EN401MP (Angle adjustable)
Part No. 196341-1

Shaft extension attachment
Penyambung alat 延伸杆
LE400MP Part No. 191E23-0
Length: 1,080mm (42-1/2")
for Pole saw, Pole hedge trimmer and Coffee harvester

Cultivator
Penggembur 耕耘器
KR400MP Part No. 195716-1
KR401MP Part No. 199185-8

UX01GZ

RM 2,023

Cordless Multi Function Power Head

Powerhead Pelbagai Fungsi Tanpa Kord

充电式多功能动力机



*Recommended batteries 2.5Ah, 4.0Ah, 5.0Ah



- **Multi-tool system consisting of power head and versatile optional attachments is ideal for a wide range of applications**

Standard Equipment: Shoulder Harness, Hex Wrench, Safety Goggles (195246-2), Accessory Bag

- GZ: Without Charger & Battery

Max Output Keluaran Maksima 最大输出	**1,000W**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 9,700 | Med: 0 - 8,200 | Low: 0 - 5,700**
Dimensions (L x W x H) Dimensi 体积	**1,001x320x209mm (39-1/2x12-5/8x8-1/4")**
Net Weight Berat Bersih 淨重	**4.2 - 4.8kg (9.3 - 10.6lbs.)**

UX01G

VIDEO CLIP
Models and specs may vary by country

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

40V max Li-ion XGT

Li-ion Ah 5.0 | 4.0 | 2.5 | 2.0

*Compatible batteries

Cordless Earth Auger

Mesin Gerudi Tanah Tanpa Kord 充电式弯角度地钻头



*Jumlah Kerja 工作量

Work Amount with BL4040

ø150mm, depth 600mm, low speed mode

100 holes (approx.)

Max Drilling Capacity

Kapasiti Penggerudian Maksimum
最大钻孔能力

ø200mm

Sandy Soil

ø100 mm — Part No. E-07294

ø150 mm — Part No. E-07303

ø200 mm — Part No. E-07319

DG001GZ05

RM 5,252

Cordless Earth Auger

Mesin Gerudi Tanah Tanpa Kord
充电式弯角度地钻头



*Recommended batteries 2.5Ah, 4.0Ah, 5.0Ah



- **High power similar to AC tool**

Come with



Standard Equipment:
Chuck Key S-13 (763251-3), Chuck Key Holder, Handle Set (191P11-3), Hex Wrench, Adapter A (327684-2), Adapter D (327687-6)

- GZ05: Without Charger & Battery

NEW BARU 新

XGT BL MOTOR XPT ADT

Capacity Kapasiti 能力	**Sandy Soil: 200mm Clay Soil: 150mm**
Chuck Capacity Kapasiti Chuck 夹头能力	**2 - 13mm (1/16 - 1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,500 | Low: 0 - 400**
Max Fastening Torque Pemutaran Tenaga Maksimum 最大扭力	**High: 55N·m (487in.lbs.) Low: 136N·m (1,210in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**836x605x199mm (33x23-3/4x7-7/8")**
Net Weight Berat Bersih 淨重	**7.2 - 8.1kg (15.9 - 17.9lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**100 holes with BL4040 ø150mm, 600mm depth (Low Speed)**

NEW UH006GM201 | UH006GZ 600mm (23-5/8")

UH006GM201: RM 5,742 | UH006GZ: RM 2,570

Cordless Hedge Trimmer

Pemangkas Tanaman Pagar Tanpa Kord
充电式篱笆树剪



*Recommended batteries 2.0Ah, 2.5Ah, 4.0Ah



- **Reliable cutting performance like engine/AC hedge trimmers**
- **Suitable for rough cutting**

Standard Equipment:
Blade Cover, Safety Goggles (195246-2)

- GM201: 1x Fast Charger, 2x 4.0Ah Battery
- GZ: Without Charger & Battery

XGT BL MOTOR WG WET GUARD

Blade Length Panjang Bilah 刀片长度	**600mm (23-5/8")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**High: 4,000 | Mid: 3,000 | Low: 2,000**
Tooth Spacing Selang Gigi 牙齿间隔	**38mm (1-1/2")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**25.0mm (1")**
Dimensions (L x W x H) Dimensi 体积	**1,123x223x191mm (44-1/2x8-3/4x7-1/2")**
Net Weight Berat Bersih 淨重	**4.4 - 5.0kg (9.7 - 11.0lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 195 min | Med: 110 min | High: 65 min with BL4040**

NEW UH004GM201 | UH004GZ 600mm (23-5/8")

UH004GM201: RM 5,742 | UH004GZ: RM 2,570

Cordless Hedge Trimmer

Pemangkas Tanaman Pagar Tanpa Kord
充电式篱笆树剪



*Recommended batteries 2.0Ah, 2.5Ah, 4.0Ah



- **Ideal for smoothly and efficiently trimming twigs, thin branches or dense hedges**
- **Suitable for trimming**

Standard Equipment:
Blade Cover, Safety Goggles (195246-2)

- GM201: 1x Fast Charger, 2x 4.0Ah Battery
- GZ: Without Charger & Battery

XGT BL MOTOR WG WET GUARD

Blade Length Panjang Bilah 刀片长度	**600mm (23-5/8")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**High: 5,000 | Mid: 3,600 | Low: 2,000**
Tooth Spacing Selang Gigi 牙齿间隔	**35mm (1-3/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**23.5mm (15/16")**
Dimensions (L x W x H) Dimensi 体积	**1,120x223x191mm (44x8-3/4x7-1/2")**
Net Weight Berat Bersih 淨重	**4.3 - 4.9kg (9.5 - 10.8lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 370 min | Med: 160 min | High: 85 min with BL4040**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

40Vmax Li-ion XGT


Li-ion Ah 5.0 | 4.0 | 2.5 | 2.0

*Compatible batteries

UH014GM101 | UH014GZ 750mm (29-1/2")

RM 5,397 | RM 3,463

Cordless Hedge Trimmer
Pemangkas Tanaman Pagar Tanpa Kord
充电式篱笆树剪



*Recommended batteries 2.0Ah, 2.5Ah, 4.0Ah



NEW BARU 新

- Increased cutting speed and torque for smooth and efficient cutting similar to those of engine hedge trimmers

Standard Equipment: Blade Cover, Chip Receiver

- GM101: 1x Fast Charger, 1x 4.0Ah Battery
- GZ: Without Charger & Battery

XGT BL MOTOR WG WET GUARD

Blade Length Panjang Bilah 刀片长度	**750mm (29-1/2")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**High: 5,000 | Mid: 3,600 | Low: 2,000**
Tooth Spacing Selang Gigi 牙齿间隔	**35mm (1-3/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**18mm (11/16")**
Dimensions (L x W x H) Dimensi 体积	**1,225x270x135mm (48-1/4x10-5/8x5-5/16")**
Net Weight Berat Bersih 净重	**4.0 - 4.7kg (8.8 - 10.4lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 390 min | Med: 160 min | High: 85 min with BL4040**

UB001GM101 | UB001GZ

RM 3,730 | RM 1,798

Cordless Blower
Mesin Penghembus Angin Tanpa Kord
充电式吹风机



*Recommended batteries 4.0Ah, 5.0Ah



- Compact and lightweight for single handed operation

Standard Equipment: Shoulder Belt (166094-6), End Nozzle (191P97-7), Adapter Pipe (191L96-5), Flat Nozzle (197889-6), Extension nozzle (197888-8)

- GM101: 1x Fast Charger, 1x 4.0Ah Battery
- GZ: Without Charger & Battery


XGT BL MOTOR WG WET GUARD

Max Air Volume Isipadu Angin Maksimum 最大风量	**Cruise Control Mode: 0 - 13.5 m³/min Boost Mode: 16.0 m³/min**
Max Air Velocity Velositi Angin Maksimum 最大风速	**Cruise Control Mode: 53 m/s Boost Mode: 64 m/s**
Blowing Force Kekuatan Tiupan 强大的吹力	**Cruise Control Mode: 0 - 12 N Boost Mode: 17 N**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Cruise Control Mode: 0 - 20,000 Boost Mode: 23,000**
Dimensions (L x W x H) Dimensi 体积	**850 - 950x167x297mm (33-1/2-37-1/2x6-9/16x11-3/4")**
Net Weight Berat Bersih 净重	**3.1 - 3.9kg (6.8 - 8.6lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Boost mode: 6 min with BL4040**

Cordless Cooler and Warmer Box

Kotak Penyejuk dan Panas Tanpa Kord
充电式保冷温箱

40Vmax Li-ion 18V LITHIUM-ION

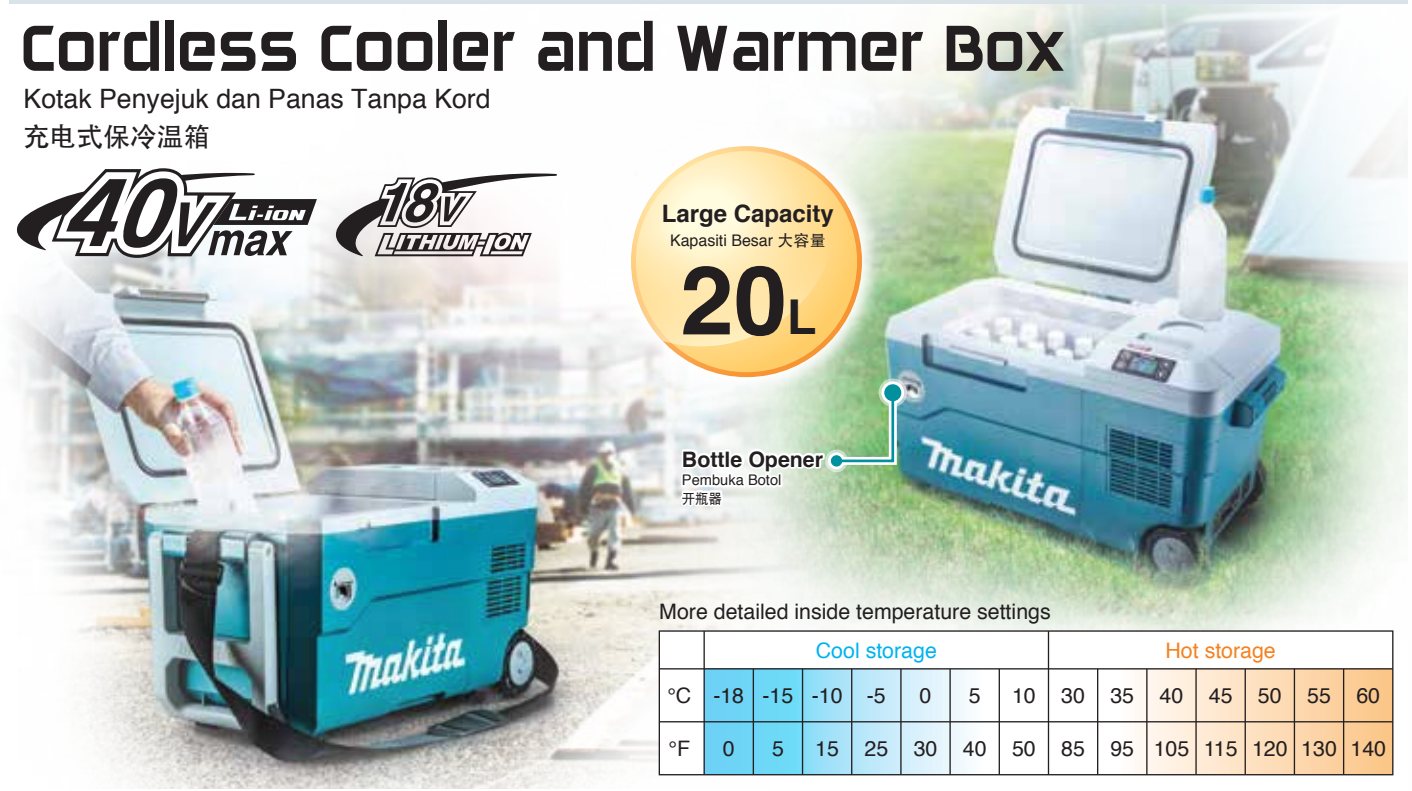

More detailed inside temperature settings

	Cool storage							Hot storage						
°C	-18	-15	-10	-5	0	5	10	30	35	40	45	50	55	60
°F	0	5	15	25	30	40	50	85	95	105	115	120	130	140

CW001GZ

RM 3,938

Cordless Cooler & Warmer Box
Kotak Penyejuk dan Panas Tanpa Kord
充电式保冷温箱



40Vmax 18V

- Compressor type cooling system provides excellent cooling capacity



NEW BARU 新

Standard Equipment: Shoulder Belt, Cigar Socket Cable

- GZ: Without Charger & Battery

XGT

Capacity Kapasiti 容量	**20L (5.3 gal)**
Cooling Capacity Kapasiti Penyejukan 冷却能力	**-18 / -15 / -10 / -5 / 0 / 5 / 10°C (0 / 5 / 15 / 25 / 30 / 40 / 50°F)**
Warming Capacity Kapasiti Pemanasan 加热能力	**30 / 35 / 40 / 45 / 50 / 55 / 60°C (85 / 95 / 105 / 115 / 120 / 130 / 140°F)**
Cord Length Panjang Kord 电源线长度	**AC Adapter: 2m (6.5ft) Cigar Socket Cable: 2.5m (8.2ft)**
Thermal Insulation Thickness Ketebalan Penebat Terma 保温厚度	**33mm**
Dimensions (L x W x H) Dimensi 体积	**663x341x372mm (26-1/8x13-3/8x14-5/8")**
Net Weight Berat Bersih 净重	**13.8 - 16.1kg (30.4 - 35.5lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**10 hrs with BL4050F x2 in cooling at -18°C 8.5 hrs with BL4050F x2 in warming at 60°C**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

XGT 40Vmax Li-ion Recommended Batteries Chart

◎ Excellent ○ Good ✕ Not Applicable

Model	 5.0Ah BL4050F	 4.0Ah BL4040	 2.5Ah BL4025	 2.0Ah BL4020
AS001G	○	◎	◎	◎
CL001G	○	◎	◎	◎
DA001G	◎	◎	◎	○
DF001G	◎	◎	◎	◎
DF002G	○	◎	◎	◎
DG001G	◎	◎	◎	○
FN001G	○	○	◎	◎
GA003G	◎	◎	◎	○
GA005G	◎	◎	◎	○
GA011G	◎	◎	◎	○
GA013G	◎	◎	◎	○
GA021G	◎	◎	◎	○
GA023G	◎	◎	◎	○
GA027G	◎	◎	◎	○
GA029G	◎	◎	◎	○
GA035G	◎	◎	◎	○
GA036G	◎	◎	◎	○
GA037G	◎	○	○	✕
GA038G	◎	○	○	✕
HM001G	◎	◎	○	○
HM002G	◎	◎	○	○
HP001G	◎	◎	◎	◎
HP002G	○	◎	◎	◎
HR001G	○	◎	◎	◎
HR002G	○	◎	◎	◎
HR003G	○	◎	◎	◎
HR005G	◎	◎	○	○
HR006G	◎	◎	○	○
HR007G	○	◎	◎	◎
HS004G	◎	◎	○	○
HS009G	◎	○	○	○
JR001G	○	◎	◎	◎
LS002G	◎	◎	◎	○
LS003G	◎	◎	○	○
LS004G	◎	◎	○	○
ML001G	◎	◎	◎	◎
ML002G	✕	◎	◎	◎
MP001G	◎	◎	◎	◎
SP001G	◎	◎	◎	○
TD001G	○	◎	◎	◎
TW001G	○	◎	◎	◎
TW005G	○	◎	◎	◎
TW007G	○	◎	◎	◎
TW008G	○	◎	◎	◎
UA004G	◎	◎	○	○
UA003G	◎	◎	○	○
UB001G	◎	◎	○	○
UC004G	○	◎	◎	○
UH004G	○	◎	◎	◎
UH006G	○	◎	◎	◎
UH014G	○	◎	◎	◎
UR003G	◎	◎	◎	○
UR007G	◎	◎	◎	○
UR008G	◎	◎	◎	○
UR012G	◎	○	○	○
UX01G	◎	◎	◎	○

Suitable for usage

*All list price shown are for reference only (exclude SST).

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

Comfortable For Long Hours Operation

Selesa untuk operasi masa panjang
舒适的长时间操作



ENERGY CAPACITY COMPARISON

PDC1200



1 : 11 Ratio

18V 6.0Ah Battery



Portable Power Pack

PDC1200
Equipped with built-in battery cells

IPX4
Water Resistance



PDC1200		
	Capacity Kapasiti 能力	33.5Ah
	Energy Capacity Keupayaan Tenaga 能量容量	1,206Wh
	Power Supply Cord Kord Bekalan Kuasa 能源线	Battery Side: 1.1m (3.6ft) Adapter Side: 0.6m (2.0ft)

Adapter set

PDC1200A01 included
- 18Vx2 Adapter (191J51-5)
- DC4001 Battery Charger Set (191L01-2)
- Harness Assembly (127668-8)



Optional **40Vmax Adapter Set (191N62-4)**



Portable Power Pack

PDC01
Powered by up to four 18V LXT batteries

IPX4
Water Resistance
*Without battery



PDC01		
	Capacity Kapasiti 能力	18V x2 : 12 Ah (with BL1860B x4) 18V : 24 Ah (with BL1860B x4)
	Energy Capacity Keupayaan Tenaga 能量容量	432Wh (BL1860Bx4)
	Power Supply Cord Kord Bekalan Kuasa 能源线	1.7m (5.6 ft)

Adapter set

1 **PDC01 (191A62-6)** included
- 18V Adapter (191J50-7)
- 18Vx2 Adapter (191J51-5)
- Harness Assembly



2 **PDC01 (191A67-6)** included
- 18Vx2 Adapter (191J51-5)
- Harness Assembly



Optional **40Vmax Adapter Set (191N62-4)**



UR201CZ
RM 3,282

Battery Powered Grass Trimmer
Pemotong Rumput Berkuasa Bateri
充电式割草机





- **1.0kW max output power similar to 30mL class engine grass trimmers**

Standard Equipment: Safety Goggles (195246-2), Metal Blade, Nylon Cutting Head, Plastic Blade, Blade Cover (for Metal Blade), Accessory Bag, Hex Wrench, Box Wrench, Band Assembly

- CZ: Without Charger & Battery

Max Output Keluaran Maksima 最大输出	**1,000W**
Cutting Width Lebar Keratan 切割宽度	**Metal Blade / Plastic Blade: 255mm (10")** **Nylon Cutting Head: 430mm (17")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Metal Blade (3 / 2 / 1):** **0 - 7,000 / 0 - 5,500 / 0 - 4,600**
	Nylon Cutting Head (3 / 2 / 1): **0 - 5,500 / 0 - 5,000 / 0 - 4,600**
	Plastic Blade (305mm) (3 / 2 / 1): **0 - 7,000 / 0 - 5,500 / 0 - 4,600**
	Plastic Blade (255mm) (3 / 2 / 1): **0 - 5,500 / 0 - 5,000 / 0 - 4,600**
Spindle Size Saiz Spindel 主轴尺寸	**M10 x 1.25LH**
Dimensions (L x W x H) Dimensi 体积	**1,795x400x269mm** **(70-1/2"x15-3/4"x10-5/8")**
Net Weight Berat Bersih 淨重	**4.7kg (10.4lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 76 min with PDC01 (BL1860B x4)** **Metal blade with load**

LM001CZ
RM 6,563

Battery Powered Lawn Mower
Mesin Pemotong Rumput Tanpa Kord
充电式手推割草机





- **Long continuous operation**


Standard Equipment: Blade, Mulch Plug, Side Discharge Mouth, Box Wrench, Rod

- CZ: Without Charger & Battery

Max Output Keluaran Maksima 最大输出	**1,600W**
Blade Hole Diameter Diameter lubang bilah 叶片孔直径	**10.0mm (3/8")**
Cutting Width Lebar Keratan 切割宽度	**534mm (21")**
Cutting Height Ketinggian Pemotongan 切割高度	**20 - 100mm (13/16" - 3-15/16")**
Grass box capacity Kapasiti Kotak Rumput 草箱容量	**70L**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,300 - 2,800**
Dimensions (L x W x H) Dimensi 体积	**1,630-1,715x590x990-1,095mm** **(64"-67-1/2"x23-1/4"x39"-43")**
Net Weight Berat Bersih 淨重	**39.0 - 42.8kg (86.0 - 94.4lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**40 min (self-propelled) | 50 min (push-drive) with PDC01 (BL1860B x4), 2-Tooth Blade** **120 min (self-propelled) | 150 min (push-drive) with PDC1200, 2-Tooth Blade**

UB001CZ
RM 2,292

Battery Powered Blower
Mesin Penghembus Angin Berkuasa Bateri
充电式吹风机





- **In Boost mode, 20N max blowing force is always available**

Standard Equipment: Shoulder Belt (191J48-4), End Nozzle (412758-3)

- CZ: Without Charger & Battery

Max Air Volume Isipadu Angin Maksimum 最大风量	**Boost Mode: 17.6m³/min** **Cruise Control Mode: 0 - 15.0m³/min**
Max Air Velocity Velositi Angin Maksimum 最大风速	**Boost Mode: 70m/s** **Cruise Control Mode: 0 - 60m/s**
Avg. Air Velocity Kelajuan Angin Purata 平均风速	**Boost Mode: 58m/s** **Cruise Control Mode: 0 - 50m/s**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Boost Mode: 24,000** **Cruise Control Mode: 0 - 21,000**
Dimensions (L x W x H) Dimensi 体积	**960 - 1,060 x 295 x 180mm** **(37-3/4-41-3/4x11-1/2x7")**
Net Weight Berat Bersih 淨重	**2.6 - 2.9kg (5.7 - 6.5lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Boost Mode: 17 min |** **Cruise Control Mode: 28 min with PDC01 BL1860B x4** **Boost Mode: 60 min |** **Cruise Control Mode: 90 min with PDC1200**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

64Vmax Li-ion Ah 4.0


Cordless Lawn Mower

Mesin Pemotong Rumput Tanpa Kord 充电式手推割草机

64Vmax Li-ion



Handle height adjustment
Mengendalikan pelarasan ketinggian
手柄高度调节



10 cutting height settings from 20mm to 100mm
10 tetapan ketinggian pemotongan dari 20mm hingga 100mm
从 20 毫米到 100 毫米的 10 种切割高度设置

Control Panel

3 cutting modes
(No load speed)
- Normal mode
  LM001J: 3,200
  LM002J: 2,800
- Soft no-load mode
  LM001J: 2,500 / 3,200
  LM002J: 2,300 / 2,800
- Noise reduction mode
  LM001J: 2,500
  LM002J: 2,300

Main switch



Grass level indicator
penunjuk kapasiti kotak rumput
草箱容量显示器






Tool-less foldable handle
Pemegang boleh lipat tanpa alat
免工具折叠手柄



Can be stored vertically
Boleh disimpan secara menegak 可垂直存放



Higher mowing performance



The blade is designed so that it tilts towards the front side of the mower when attached, preventing double-cutting for reduced current consumption



Optimum blade design for less rotational speed reduction of the blade


LM002J
Mowing area
1,600m²



LM002JM101 530mm (21")

RM 7,220

Cordless Lawn Mower
Mesin Pemotong Rumput
Tanpa Kord
充电式手推割草机



- **High power cordless lawn mower powered by 64Vmax Li-Ion battery**

Standard Equipment:
Blade, Mulching Plug, Socket Wrench, Rod

- JM101: 1x Charger, 1x 4.0Ah Battery

BL MOTOR XPT SOFT NO LOAD



Max Output Keluaran Maksima 最大输出	**2,300W**
Cutting Width Lebar Keratan 切割宽度	**534mm (21")**
Cutting Height Ketinggian Pemotongan 切割高度	**20 - 100mm (13/16 - 3-15/16")**
Grass Box Capacity Kapasiti Kotak Rumput 草箱容量	**70L**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Standard Mode: 2,800** **Low Noise Mode: 2,300**
Dimensions (L x W x H) Dimensi 体积	**1,710-1,800x585x950-1,090mm** **(67-1/2-71x23x37-1/2-43")**
Net Weight Berat Bersih 淨重	**25.7 - 27.6kg (56.7 - 60.8lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Moving Area 1,600m² or** **34 min with BL6440**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V X2 36V LXT® Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

Cordless Rotary Hammer

Tukul Putar Tanpa Kord 充电式电钻



Accessories (Optional)
Aksesori 配件



Dust Extractor Attachment Set
Part No. 196536-6

DHR400ZKN 40mm (1-9/16")

RM 5,552

Cordless Rotary Hammer
Tukul Putar Tanpa Kord
充电式电钻



2 modes T T1



- **High power and excellent performance**

Standard Equipment: Side Handle, Side Grip, Depth Gauge, Bit Grease (194683-7), Cleaning Cloth

- ZKN: With Carrying Case, Without Charger & Battery

Impact Energy Kekuatan Impak 单次最大锤击力	EPTA-Procedure 05/2009: 8.0J Our experimental conditions: 11.4J
Capacity Kapasiti 能力	Concrete (TCT Bit): 40mm (1-9/16") Concrete (Core Bit): 105mm (4-1/8")
Impacts Per Minute (IPM) Impak Per Minit 冲击数	1,450 - 2,900
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	250 - 500
Dimensions (L x W x H) Dimensi 体积	473x120x285mm (18-5/8"x4-3/4"x11-1/4")
Net Weight Berat Bersih 淨重	7.3 - 8.1kg (16.1 - 17.9lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	25 holes with BL1850B x2 Concrete Grade 40 D18mm x 140mm Depth

BL MOTOR XPT AVT & SOFT NO LOAD AWS AFT

Cordless Combination Hammer

Tukul Kombinasi Tanpa Kord 充电式冲击电钻电锤



Accessories (Optional)
Aksesori 配件

HEPA Filter
Part No. 199557-7



Dust cup
Part No. 195173-3



DX08
for DHR280, DHR282

Dust extraction system set
Part No. 199579-7



Dust case
Part No. 199555-1



DHR282PT2J | DHR282Z 28mm (1-1/8")

DHR282PT2J RM 3,818 | DHR282Z RM 2,233

Cordless Combination Hammer
Tukul Kombinasi Tanpa Kord
充电式冲击电钻电锤



3 modes T1 T



- **Auto-start Wireless System (AWS) connects to vacuum cleaner with Bluetooth**

Standard Equipment: Side Grip, Depth Gauge, Cleaning Cloth, Bit Grease (194683-7)

- PT2J: 1x Two Port Multi Fast Charger, 2x 5.0Ah Battery, 1x Makpac Connector Box
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

BL MOTOR XPT AVT SOFT NO LOAD AWS AFT

Impact Energy Kekuatan Impak 单次最大锤击力	EPTA-Procedure 05/2009: 2.8J Our experimental conditions: 3.2J
Capacity Kapasiti 能力	Concrete: 28mm (1-1/8") | Steel: 13mm (1/2") | Wood: 32mm (1-1/4") | Core Bit: 54mm (2-1/8") | Diamond Core Bit (Dry Type): 65mm (2-9/16")
Impacts Per Minute (IPM) Impak Per Minit 冲击数	0 - 5,000
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	0 - 980
Chuck Capacity Kapasiti Chuck 夹头能力	1.5 - 13mm (1/16 - 1/2")
Max Output Keluaran Maksima 最大输出	680W
Dimensions (L x W x H) Dimensi 体积	373x134x232mm (14-3/4"x5-1/4"x9-1/8")
Net Weight Berat Bersih 淨重	3.9 - 5.0 kg (8.6 - 11.0 lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	187 holes with BL1850B x2 Concrete Grade 40 D10.5mm x 60mm Depth

DHR280PT2J | DHR280Z 28mm (1-1/8")

DHR280PT2J RM 3,632 | DHR280Z RM 2,045

Cordless Combination Hammer
Tukul Kombinasi Tanpa Kord
充电式冲击电钻电锤



3 modes T1 T



- **High Power and Low Vibration**

Standard Equipment: Side Grip, Depth Gauge, Cleaning Cloth, Bit Grease (194683-7)

- PT2J: 1x Two Port Multi Fast Charger, 2x 5.0Ah Battery, 1x Makpac Connector Box
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

BL MOTOR XPT AVT SOFT NO LOAD

Impact Energy Kekuatan Impak 单次最大锤击力	EPTA-Procedure 05/2009: 2.8J Our experimental conditions: 3.2J
Capacity Kapasiti 能力	Concrete: 28mm (1-1/8") | Steel: 13mm (1/2") | Wood: 32mm (1-1/4") | Core Bit: 54mm (2-1/8") | Diamond Core Bit (Dry Type): 65mm (2-9/16")
Impacts Per Minute (IPM) Impak Per Minit 冲击数	0 - 5,000
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	0 - 980
Chuck Capacity Kapasiti Chuck 夹头能力	1.5 - 13mm (1/16 - 1/2")
Max Output Keluaran Maksima 最大输出	680W
Dimensions (L x W x H) Dimensi 体积	373x134x232mm (14-3/4"x5-1/4"x9-1/8")
Net Weight Berat Bersih 淨重	3.9 - 4.9 kg (8.6 - 10.8 lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	187 holes with BL1850B x2 Concrete Grade 40 D10.5mm x 60mm Depth

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V X2 (36V) LXT®

Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DHR263PM4 | DHR263RF4 | DHR263Z 26mm (1")

DHR263PM4 RM 4,042 | DHR263RF4 RM 3,413 | DHR263Z RM 1,798

442

Cordless Combination Hammer
Tukul Kombinasi Tanpa Kord
充电式冲击钻锤



3 modes



DHR263RF4 Sehingga stok habis 售完即止 WHILE STOCK LAST

- 3-Mode operation for Rotation Only, Hammering with Rotation or Hammering Only

Standard Equipment: Side Grip, Depth Gauge, Cleaning Cloth, Bit Grease (194683-7)

- PM4: 1x Two Port Multi Fast Charger, 4x 4.0Ah Battery, 1x Tool Bag
- RF4: 1x Rapid Charger, 4x 3.0Ah Battery, 1x Carrying Case
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

XPT

Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 2.5J Our experimental conditions: 3.0J**
Capacity Kapasiti 能力	**Concrete: 26mm (1") | Steel: 13mm (1/2") | Wood: 32 mm (1-1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 5,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 1,250**
Dimensions (L x W x H) Dimensi 体积	**350x116x232mm (13-3/4"x4-9/16"x9-1/8")**
Net Weight Berat Bersih 淨重	**4.1 - 5.1kg (9.0 - 11.3lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**133 holes with BL1850B x2 Concrete Grade 40 D10.5mm x 60mm Depth**

DDA460ZK 13mm (1/2")

RM 3,867

Cordless Angle Drill
Gerudi Sudut Tanpa Kord
充电式角向电钻





- Powerful drilling even large diameter holes

Standard Equipment: Chuck Key, Hex Wrench, Side Grip

- ZK: With Carrying Case, Without Charger & Battery

BL MOTOR XPT ADT

DDA460 VIDEO CLIP Models and specs may vary by country

Capacity Kapasiti 能力	**Steel: 13mm (1/2")**
	Wood (Self-Feed Bit) Hi: 65mm (2-9/16")
	Wood (Self-Feed Bit) Lo: 118mm (4-5/8")
	Wood (Hole Saw) Hi: 105mm (4-1/8")
	Wood (Hole Saw) Lo: 159mm (6-1/4")
	Wood (Auger-Bit): 50mm (2")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,400 | Low: 0 - 350**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**High: 48N·m (430 in.lbs.) Low: 136N·m (1,210 in.lbs.)**
Max Output Keluaran Maksima 最大输出	**1,350 W**
Dimensions (L x W x H) Dimensi 体积	**538x128x223mm (21-1/4"x5"x8-3/4")**
Net Weight Berat Bersih 淨重	**5.7 - 6.4kg (12.6 - 14.0lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**80 holes with BL1850B x2 2 Layered SPF**

Cordless Shear Wrench

Perengkuh Ricih Tanpa Kord 充电式扭断套筒扳手

Accessories (Optional)
Aksesori 配件

Sleeve size reference table

*Type F (for HEXA TECH (GFD France))

Bolt Size	Outer sleeve			Inner sleeve	
	Hex Size	L (mm)	Part No.	L (mm)	Part No.
M16	27	35	764362-7	36	764416-0
M20	32	37	764361-9	38	764417-8
M20	32	37	764361-9	38	*764422-5
M22, 7/8"	36 1-7/16"	39	153909-6	39	764418-6
M22, 7/8"	36 1-7/16"	85	764364-3	85	764352-0
M22, 7/8"	36 1-7/16"	170	764365-1	170	764354-6



DWT310ZK M20 (3/4"), M22 (7/8")

RM 17,093

Cordless Shear Wrench
Perengkuh Ricih Tanpa Kord
充电式扭断套筒扳手





- Up to 14% Faster Fastening than Corded Model 6922NB

Standard Equipment: Screwdriver, Shoulder Belt, M20 Sleeve, M22 Sleeve

- ZK: With Carrying Case, Without Charger & Battery

BL MOTOR XPT

Capacity Kapasiti 能力	**High Strength Torque Shear Bolt (HTB): M16 (optional), M20, M22 (5/8", 3/4", 7/8")**
	Super High Strength Torque Shear Bolt (SHTB): M16, M20 (5/8", 3/4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**14**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**804N·m (593ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**296x130x377mm (11-5/8"x5-1/8"x14-7/8")**
Net Weight Berat Bersih 淨重	**6.5 - 7.1kg (14.3 - 15.7lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**300 pcs with BL1850B x2 M22 (7/8") Torque Shear Bolts**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V X2 36V LXT®

Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DGA901Z | DGA900Z 230mm (9")

RM 1,810 | RM 1,623

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机





- **Auto-start Wireless System (AWS) connects to vacuum cleaner with Bluetooth**

Standard Equipment: Wheel Cover, Side Grip, Lock Nut Wrench

- Z: Without Charger & Battery

ONLY FOR DGA901

Wheel Diameter Diameter Mata Canai 砂轮片直径	**230mm (9")**
Hole Diameter Diameter Lubang 孔直径	**22.23mm (7/8")**
Max Wheel Thickness Ketebalan Roda 轮片厚度	**6.5mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**6,000**
Max Output Keluaran Maksima 最大输出	**1,500W**
Dimensions (L x W x H) Dimensi 体积	**499x250x158mm** **(19-5/8"x9-7/8"x6-1/4")**
Net Weight Berat Bersih 淨重	**5.2 - 8.0kg (11.4 - 17.7lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**17 cuts with BL1850B x2** **Equiangular Angle Steel 50 x 50mm**

DGA701Z | DGA700Z 180mm (7")

RM 1,795 | RM 1,605

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机





- **Auto-start Wireless System (AWS) connects to vacuum cleaner with Bluetooth**

Standard Equipment: Wheel Cover, Side Grip, Lock Nut Wrench

- Z: Without Charger & Battery

ONLY FOR DGA701

Wheel Diameter Diameter Mata Canai 砂轮片直径	**180mm (7")**
Hole Diameter Diameter Lubang 孔直径	**22.23mm (7/8")**
Max Wheel Thickness Ketebalan Roda 轮片厚度	**7.2 mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**7,800**
Max Output Keluaran Maksima 最大输出	**1,500W**
Dimensions (L x W x H) Dimensi 体积	**499x200x158mm** **(19-5/8"x7-7/8"x6-1/4")**
Net Weight Berat Bersih 淨重	**5.0 - 6.0kg (11.0 - 13.3lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**17 cuts with BL1850B x2** **Equiangular Angle Steel 50 x 50mm**

DJR360RF4 | DJR360Z

RM 3,418 | RM 1,805

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯





- **Electric 2 speed provides ideal RPM of high speed for wooden cutting and low speed for metal cutting**

Standard Equipment: Recipro Saw Blades 2pcs (B-05175 & B-05169)

- RF4: 1x Rapid Charger, 4x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Length of Stroke Panjang Strok 冲程长度	**32mm (1-1/4")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**High: 0 - 3,000 | Low: 0 - 2,300**
Capacity Kapasiti 能力	**Pipe: 130mm (5-1/8")** **Wood: 255mm (10")**
Dimensions (L x W x H) Dimensi 体积	**449x116x243mm** **(17-3/4"x4-9/16"x9-9/16")**
Net Weight Berat Bersih 淨重	**4.0 - 4.7kg (8.9 - 10.3lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**110 pcs with BL1850B x2** **Steel Pipe (ϕ34 x 3mm)**



Cordless Portable Cut-off

Mesin Pemotong Tanpa Kord 充电式无刷轻钢架砂轮切断机

CUTTING CAPACITY A workpiece thinner than 1.6mm is recommended for cutting with this tool

Form of Materials	D	W x H	W x H	S x S
Miter Angle 0°	**D:** ø127mm (5")	**H x W:** 115 x 130 (4-1/2"x5-1/8") 102 x 194mm (4"x 7-5/8") 70 x 233mm (2-3/4"x 9-1/8")	**H x W:** 119 x 119mm (4-11/16"x 4-11/16")	**S x S:** 137 x 137mm (5-3/8"x 5-3/8")
Miter Angle 45°	**D:** ø127mm (5")	**H x W:** 115 x 103mm (4-1/2"x 4-1/16")	**H x W:** 106 x 106mm (4-3/16"x 4-3/16")	**S x S:** 100 x 100mm (4"x 4")

D: Diameter | **W:** Width | **H:** Height | **S:** Side

DLW140Z 355mm (14")

RM 2,472

Cordless Portable Cut-off
Mesin Pemotong Tanpa Kord
充电式无刷轻钢架砂轮切断机



- **World's First Cordless Portable Cut-off**

Standard Equipment:
Cut-Off Wheel (B-64696)

- Z: Without Charger & Battery

DLW140 VIDEO CLIP Models and specs may vary by country



Wheel Diameter Diameter Mata Canai 砂轮片直径	**355mm (14")**
Hole Diameter Diameter Lubang 孔直径	**25.4mm (1")**
Max Wheel Thickness Ketebalan Roda 轮片厚度	**3mm (1/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,800**
Capacity at 90° Kapasiti Pemotongan 切割能力	**Round: 127mm (5")** **Rectangular: 115x130mm (4-1/2"x5-1/8")** **Rectangular: 102x194mm (4"x7-5/8")** **Rectangular: 70x233mm (2-3/4"x9-1/8")**
Capacity at 45° Kapasiti Pemotongan 切割能力	**Round: 127mm (5")** **Rectangular: 115x103mm (4-1/2"x4-1/16")**
Dimensions (L x W x H) Dimensi 体积	**537x280x640mm** **(21-1/8"x11"x25-1/4")**
Net Weight Berat Bersih 淨重	**17.2 - 17.8kg (37.9 - 39.3lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**130 cuts with BL1850B x2** **Metal Stud (H:75mm, W: 45mm, T: 0.8mm)**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V X2 36V LXT®

Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DLS211Z 305mm (12")
RM 6,255

Cordless Slide Compound Miter Saw
Gergaji Kompaun Miter Tanpa Kord
充电式斜断锯





- **Auto-start Wireless System (AWS) connects to vacuum cleaner with Bluetooth**

Standard Equipment: TCT Saw Blade (B-67452), Dust Bag (1228520), Triangular Rule, Vertical Vise, Hex Wrench

- Z: Without Charger & Battery

Blade Diameter Diameter Bilah 锯片直径	305mm (12")
Miter Angle Sudut Miter 斜接角	60°L / 60°R
Bevel Angle Sudut Bevel 斜角	48°L / 48°R
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	90°Miter: 107 x 363mm (4-1/4" x 14-1/4") 90° Miter: 92 x 382mm (3-5/8" x 15") 45° Miter, L/R: 107 x 255mm (4-1/4" x 10") 45° Miter, L/R: 92 x 268mm (3-5/8" x 10-1/2")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	4,400
Dimensions (L x W x H) Dimensi 体积	898x690x725mm (35-1/4"x27-1/4"x28-1/2")
Net Weight Berat Bersih 淨重	30.7 - 31.3kg (67.6 - 69.1lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	90 cuts with BL1860B x2 Melapi thick 60mm x width 300mm at 90° slide cutting

DLS111Z 260mm (10-1/4")
RM 5,462

Cordless Slide Compound Miter Saw
Gergaji Kompaun Miter Tanpa Kord
充电式斜断锯





- **Auto-start Wireless System (AWS) connects to vacuum cleaner with Bluetooth**


Standard Equipment: TCT Saw Blade (B-64668), Dust Bag (1228520), Triangular Rule, Vertical Vise, Hex Wrench

- Z: Without Charger & Battery

Blade Diameter Diameter Bilah 锯片直径	260mm (10-1/4")
Miter Angle Sudut Miter 斜接角	60°L / 60°R
Bevel Angle Sudut Bevel 斜角	48°L / 48°R
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	90° Miter: 91 x 279mm (3-5/8" x 11") 90° Miter: 68 x 310mm (2-11/16" x 12-1/4") 45° Miter, L/R: 91 x 197mm (3-5/8" x 7-3/4") 45° Miter, L/R: 68 x 218mm (2-11/16" x 8-5/8")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	4,400
Dimensions (L x W x H) Dimensi 体积	805x644x660mm (31-3/4"x25-3/8"x26")
Net Weight Berat Bersih 淨重	26.6 - 27.3kg (58.6 - 60.2 lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	150 cuts with BL1860B x2 Melapi thick 60mm x width 300mm at 90° slide cutting

DLS714PM2 RM 5,988 | DLS714Z 190mm (7-1/2") RM 4,548

Cordless Slide Compound Miter Saw
Gergaji Kompaun Miter Tanpa Kord
充电式斜断锯





- **Large cutting capacity; Crosscuts up to 52 x 300 mm (2-1/16" x 11-3/4") at 90°**

Standard Equipment: TCT Saw Blade (B-03850), Dust Bag (1228520), Holder Set, Vertical Vise, Hex Wrench, Triangular Rule

- PM2: 1x Two Port Multi Fast Charger, 2x 4.0Ah Battery
- Z: Without Charger & Battery

Blade Diameter Diameter Bilah 锯片直径	190mm (7-1/2")
Miter Angle Sudut Miter 斜接角	47°L / 57°R
Bevel Angle Sudut Bevel 斜角	45°L / 5°R
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	90°: 52 x 300mm (2-1/16" x 11-3/4") at 45° left: 40 x 300mm (1-9/16" x 11-3/4") at 5° right: 40 x 300mm (1-9/16" x 11-3/4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	5,700
Dimensions (L x W x H) Dimensi 体积	655x430x445mm (25-3/4"x17"x17-1/2")
Net Weight Berat Bersih 淨重	12.6kg (27.8lbs)
Work Amount (approx.) Jumlah Kerja 工作量	350 pcs with BL1850B x2 SPF Material 2x4"

DHS900PT2 RM 5,645 | DHS900Z 235mm (9-1/4") RM 4,060

Cordless Circular Saw
Gergaji Piring Tanpa Kord
充电式圆锯





- **Auto-start Wireless System (AWS) connects to vacuum cleaner with Bluetooth**
- **Compatible with guide rail without adapter, providing precision cutting**

Standard Equipment: TCT Saw Blade (E-01959), Sub Base, Hex Wrench

- PT2: 1x Two Port Multi Fast Charger, 2x 5.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Blade Diameter Diameter Bilah 锯片直径	235mm (9-1/4")
Hole Diameter Diameter Lubang 孔直径	15.88mm (5/8") | 25mm (1") | 25.4mm (1") | 30mm (1-3/16")
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	90°: 85mm (3-3/8") 45°: 61mm (2-3/8") 60°: 44mm (1-3/4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	4,500
Dimensions (L x W x H) Dimensi 体积	413x196x316mm (16-1/4"x7-3/4"x12-1/2")
Net Weight Berat Bersih 淨重	5.3 - 6.0kg (11.7 - 13.2lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	110 cuts with BL1850B x2 Oak wood (thickness 80mm x width 300mm) at 90° cutting

DHS783Z RM 3,228 | DHS782Z 190mm (7-1/2")/ 185mm (7-1/4") RM 2,943

Cordless Circular Saw
Gergaji Piring Tanpa Kord
充电式圆锯





- **Auto-start Wireless System (AWS) connects to vacuum cleaner with Bluetooth**
- **Compatible with Guide Rail without Adapter**

Standard Equipment: TCT Saw Blade (B-62022), Hex Wrench, Guide Rule, Dust Nozzle

- Z: Without Charger & Battery

DHS783

VIDEO CLIP
Models and specs may vary by country

ONLY FOR DHS783

Blade Diameter Diameter Bilah 锯片直径	190mm (7 - 1/2") | 185mm (7 - 1/4")
Hole Diameter Diameter Lubang 孔直径	15.88mm (5/8") | 20mm (13/16") | 30mm (1-3/16")
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	90°: 62.5/ 60mm (2-7/16"/ 2-3/8") 45°: 44.5/ 43mm (1-3/4"/ 1-11/16") 48°: 42/ 41mm (1-5/8"/ 1-5/8")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	6,000
Max Output Keluaran Maksima 最大输出	1,800W
Dimensions (L x W x H) Dimensi 体积	348x210x290mm (13-3/4"x8-1/4"x11-3/8")
Net Weight Berat Bersih 淨重	4.5 - 5.1kg (9.9 - 11.3lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	190 cuts with BL1850B x2 Melapi thickness 50mm x width 300mm at 90° cutting

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V X2 36V LXT® Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

DHS710RM2J | DHS710RF2J 190mm (7-1/2")

442

RM 2,568 | RM 2,405

Cordless Circular Saw
Gergaji Piring Tanpa Kord
充电式圆锯





- **Lightweight for operator comfort**

Standard Equipment: TCT Saw Blade (D-09123), Rip Fence (Guide Rule), Hex Wrench

- RM2J: 1x Rapid Charger, 2x 4.0Ah Battery, 1x Makpac Connector Box
- RF2J: 1x Rapid Charger, 2x 3.0Ah Battery, 1x Makpac Connector Box

DHS710 VIDEO CLIP Models and specs may vary by country

Blade Diameter Diameter Bilah 锯片直径	190/ 185mm (7-1/2"/ 7-1/4")
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	90°: 68.5/ 66mm (2-11/16"/ 2-5/8") 45°: 49/ 47.5mm (1-15/16"/ 1-7/8") 50°: 44/ 42.5mm (1-3/4"/ 1-11/16")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	4,800
Dimensions (L x W x H) Dimensi 体积	356x217x298mm (14"x8-1/2"x11-3/4")
Net Weight Berat Bersih 淨重	3.9 - 4.6kg (8.6 - 10.1lbs)
Work Amount (approx.) Jumlah Kerja 工作量	205 pcs with BL1850B x2 SPF 2 x 10 (thickness 38mm, width 235mm), 90° cut

DRS780Z 185mm (7-1/4")

RM 1,905

Cordless Rear Handle Saw
Gergaji Piring Tanpa Kord
充电式后把手圆锯



Opposite Handling
Cut left side of material



- **Cuts 3X Material in a Single Pass; Blade Left Design**

Standard Equipment: TCT Saw Blade (B-62022), Offset Wrench

- Z: Without Charger & Battery

Blade Diameter Diameter Bilah 锯片直径	185mm (7-1/4")
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	90°: 65mm (2-9/16") 45°: 45mm (1-3/4") 53°: 38mm (1-1/2")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	5,100
Dimensions (L x W x H) Dimensi 体积	446x196x270mm (17-1/2"x7-3/4"x10-5/8")
Net Weight Berat Bersih 淨重	5.0 - 5.6kg (11.1 - 12.4lbs.)
Work Amount (approx.)	290 cuts with BL1850B x2 SPF 2 x 10 (thickness 38mm, width 235mm), 90° cut

DSP601Z | DSP600Z 165mm (6-1/2")

RM 3,273 | RM 2,678

Cordless Plunge Cut Saw
Gergaji Piring Tanpa Kord
充电式圆锯





- **Auto-start Wireless System (AWS) connects to vacuum cleaner with Bluetooth**

Standard Equipment: TCT Saw Blade (B-57364), Hex Wrench

- Z: Without Charger & Battery

ONLY FOR DSP601

Blade Diameter Diameter Bilah 锯片直径	165mm (6-1/2")
Bevel Capacity Kapasiti Bevel 斜角容量	-1° - 48°
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	90°: 56mm (2-3/16") 45°: 40 mm (1-9/16") 48°: 38 mm (1-1/2")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	2,500 - 6,300
Dimensions (L x W x H) Dimensi 体积	346x241x272mm (13-5/8"x9-1/2"x10-3/4")
Net Weight Berat Bersih 淨重	4.4 - 5.1kg (9.8 - 11.2lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	48 cuts with BL1850B x2 Melamine Board 32mm (Thick) x 1000mm (Length)





***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V X2 36V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

Cordless Power Cutter

Mesin Pemotong Tanpa Kord 充电式切断机

*Jumlah Kerja 工作量

Work Amount with BL1860B x2

Concrete Cutting 30mm depth

7.8m

length with Diamond Wheel (approx.)



Battery cover

protects battery from water in wet cutting

Penutup pelindung bateri melindungi bateri dari air semasa pemotongan basah

电池保护盖防止电池在潮湿切割时受到水的侵蚀




Overload warning LED lamp

- alerts operator of overload with a red blinking LED
- reduces unnecessary battery recharging by overload protection

Lampu amaran LED merah berkedip mengingatkan operator mengenai kelebihan beban, mengurangkan pengecasan bateri yang tidak perlu untuk melindungi bateri dengan berkesan dan memanjangkan hayat bateri

过载LED警告灯, 红色闪烁LED提醒操作过载, 减少不必要的电池充电, 有效保护电池、延长电池使用寿命

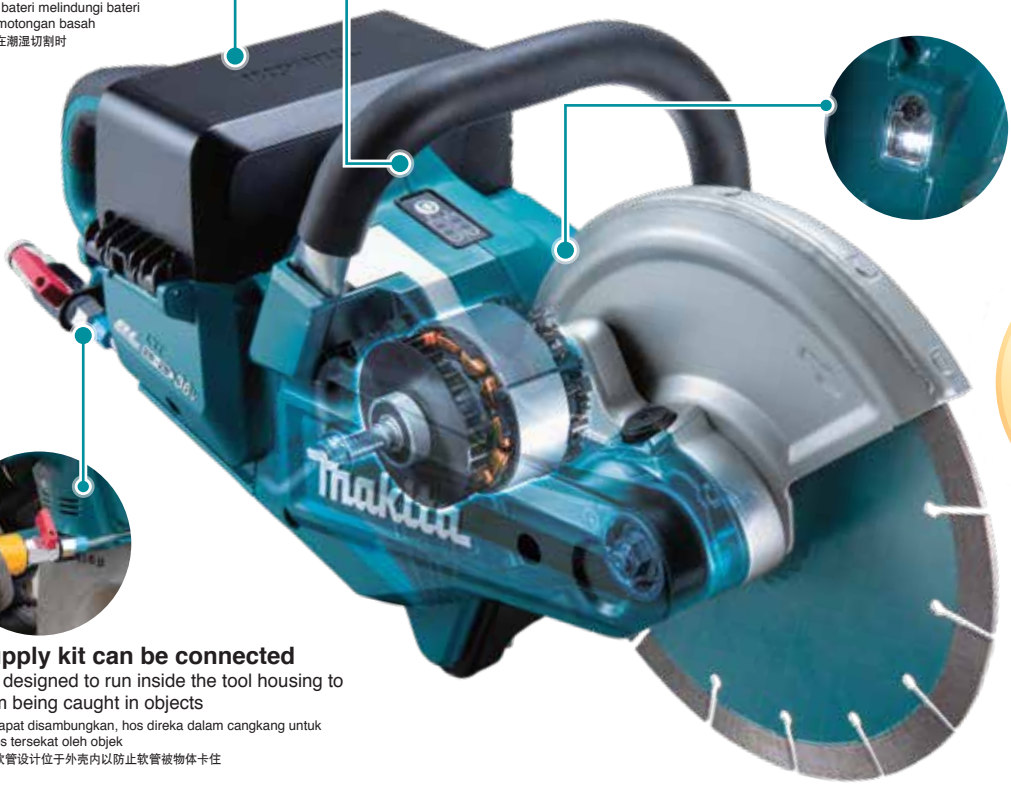

LED job light

enables operation in the dark sites where electricity is not supplied

Lampu kerja LED membolehkan operasi di kawasan gelap

LED工作灯, 昏暗场所中也方便操作

Maximum Cutting Depth

Kedalaman Pemotongan Maksimum

最大切割深度

88 mm



Water supply kit can be connected

The hose is designed to run inside the tool housing to prevent from being caught in objects

Kit bekalan air dapat disambungkan, hos direka dalam cangkang untuk mengelakkan hos tersekat oleh objek

可连接供水套件, 软管设计位于外壳内以防止软管被物体卡住





DCE090Z 230mm (9")

RM 4,903

Cordless Power Cutter

Mesin Pemotong Tanpa Kord

充电式切断机



- **Battery cover protects battery from water in wet cutting**



Standard Equipment: Hex Wrench, Wrench, Coupling Sleeve

- Z: Without Charger & Battery

BL MOTOR XPT AFT BRAKE

Wheel Diameter Diameter Bilah 锯片直径	**230mm (9")**
Wheel Hole Diameter Diameter Lubang 孔直径	**22.23mm (7/8")**
Max Wheel Thickness Ketebalan Roda Maksimum 最大轮片厚度	**3.0mm (1/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**88mm (3-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**6,600**
Dimensions (L x W x H) Dimensi 体积	**554x241x283mm (21-3/4x9-1/2x11-1/8")**
Net Weight Berat Bersih 净重	**5.6 - 6.3kg (12.3 - 13.9lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**Concrete Cutting 30mm depth 7.8m length with Diamond Wheel with BL1860B x2**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V X2 36V LXT®

Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DUR369LZ
RM 3,282

Cordless Grass Trimmer
Pemotong Rumput Tanpa Kord
充电式割草机



- 1.0kW max output power similar to 30mL class engine grass trimmers

Standard Equipment: Safety Goggles (195246-2), Metal Blade, Nylon Cutting Head, Plastic Blade, Blade cover (for metal blade), Accessory Bag, Hex Wrench, Box Wrench, Band Assembly


- LZ: Without Charger & Battery

BL MOTOR XPT ADT AFT

Max Output Keluaran Maksima 最大输出	1,000W
Cutting Width Lebar Keratan 切割宽度	Metal Blade: 255mm (10") | Plastic Blade: 305mm (12") Nylon Cutting Head: 430mm (17")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	Metal Blade (3 / 2 / 1): 0 - 7,000 / 0 - 5,500 / 0 - 4,600 Nylon Cutting Head (3 / 2 / 1): 0 - 5,500 / 0 - 5,000 / 0 - 4,600 Plastic Blade (305mm) (3 / 2 / 1): 0 - 7,000 / 0 - 5,500 / 0 - 4,600 Plastic Blade (255mm) (3 / 2 / 1): 0 - 5,500 / 0 - 5,000 / 0 - 4,600
Spindle Size Saiz Spindel 主轴尺寸	M10 x 1.25LH
Dimensions (L x W x H) Dimensi 体积	1,846x400x269mm (72-1/2"x15-3/4"x10-5/8")
Net Weight Berat Bersih 淨重	5.7 - 6.3kg (12.6 - 13.9lbs.)
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	Low: 38 min with BL1860B x2 Metal blade with load

DUR368LPT2 | DUR368LZ
DUR368LPT2 RM 4,190 | DUR368LZ RM 2,605

Cordless Grass Trimmer
Pemotong Rumput Tanpa Kord
充电式割草机

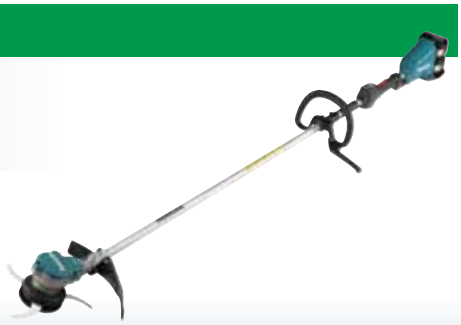

- Lightweight for reduced operator fatigue

Standard Equipment: Safety Goggles (195246-2), Plastic Blade (198384-9), Accessory Bag, Hex Wrench, Band Assembly


- LPT2: 1x Two Port Multi Fast Charger, 2x 5.0Ah Battery
- LZ: Without Charger & Battery

BL MOTOR XPT ADT AFT

	DUR368LPT2	DUR368LZ
Max Output Keluaran Maksima 最大输出	550W	
Cutting Width Lebar Keratan 切割宽度	Metal Blade: 230mm (9") Trimmer Head: 350mm (13-3/4") Plastic Blade: 255mm (10")	
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	High: 6,500 | Med: 5,300 | Low: 3,500	
Spindle Size Saiz Spindel 主轴尺寸	M10 x 1.25LH	
Dimensions (L x W x H) Dimensi 体积	1,758x362x231mm (69-1/4"x14-1/4"x9-1/8")	
Net Weight Berat Bersih 淨重	3.9 - 4.5kg (8.6 - 10.0lbs.)	
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	Low: 106 min with BL1860B x2 Plastic blade with load	

DUR368APT2 | DUR368AZ
DUR368APT2 RM 4,513 | DUR368AZ RM 2,927

Cordless Grass Trimmer
Pemotong Rumput Tanpa Kord
充电式割草机





- Lightweight for reduced operator fatigue

Standard Equipment: Safety Goggles (195246-2), Plastic Blade, Accessory Bag, Hex Wrench, Band Assembly

- APT2: 1x Two Port Multi Fast Charger, 2x 5.0Ah Battery
- AZ: Without Charger & Battery

BL MOTOR XPT ADT AFT

	DUR368APT2	DUR368AZ
Max Output Keluaran Maksima 最大输出	550W	
Cutting Width Lebar Keratan 切割宽度	Metal Blade: 255mm (10") Trimmer Head: 350mm (13-3/4") Plastic Blade: 255mm (10")	
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	High: 6,500 | Med: 5,300 | Low: 3,500	
Spindle Size Saiz Spindel 主轴尺寸	M10 x 1.25LH	
Dimensions (L x W x H) Dimensi 体积	1,758x615x442mm (69-1/4"x24-1/4"x17-3/8")	
Net Weight Berat Bersih 淨重	4.1 - 4.7kg (9.0 - 10.5lbs.)	
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	Low: 106 min with BL1860B x2 Plastic blade with load	

DUR364LPM4 | DUR364LRM2 | DUR364LZ
DUR364LPM4 RM 4,175 | DUR364LRM2 RM 3,015 | DUR364LZ RM 1,932

Cordless Grass Trimmer
Pemotong Rumput Tanpa Kord
充电式割草机





- 2-Speed options allows the operator to match speed to application

Standard Equipment: Safety Goggles (195246-2), Nylon Cutting Head, Accessory Bag, Hex Wrench


- LPM4: 1x Two Port Multi Fast Charger, 4x 4.0Ah Battery
- LRM2: 1x Rapid Charger, 2x 4.0Ah Battery
- LZ: Without Charger & Battery

BL MOTOR XPT

	DUR364LPM4	DUR364LRM2	DUR364LZ
Max Output Keluaran Maksima 最大输出	550W		
Cutting Width Lebar Keratan 切割宽度	Trimmer Head: 350mm (13-3/4") Plastic Blade: 255mm (10")		
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	High: 6,500 | Low: 5,000		
Spindle Size Saiz Spindel 主轴尺寸	M8 x 1.25RH		
Dimensions (L x W x H) Dimensi 体积	1,754x310x229mm (69"x12-1/4"x9")		
Net Weight Keberatan 净重	3.6 - 4.4kg (8.0 - 9.7lbs)		
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	Low: 60 min | High: 34 min with BL1850B x2 Nylon cutting head with load		

DUP362ZN
RM 7,523

Battery Powered Pruning Shears
Gunting Pemangkas Bateri
充电式电剪





- Extra sharp, Made-in-Japan forged blade

Standard Equipment: Oil Supply, Wrench Set, Diamond File, Cord Holder, Holster, Harness, Arm Band, Tool Bag, Shear Blade

- ZN: Without Charger & Battery

XPT

VIDEO CLIP
DUP362
Models and specs may vary by country

Max Output Keluaran Maksima 最大输出	200W
Capacity Kapasiti 能力	Max Cutting : 33mm (1-5/16") Max Blade Opening: 54mm
Cutting Torque Tork Pemotongan 切割扭矩	250N
Dimensions (L x W x H) Dimensi 体积	305x43x106mm (12"x1-11/16"x4-3/16")
Net Weight Keberatan 净重	0.77 - 0.82kg (1.7 - 1.8lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	71,000cuts with BL1850B x2 (ø15mm Grape Wine Branch)

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V X2 (36V) LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DUP361Z
RM 6,630

Battery Powered Pruning Shears
Gunting Pemangkas Bateri
充电式电剪



- **Extra sharp, Made-in-Japan forged blade**



Standard Equipment: Oil Supply, Wrench Set, Diamond File, Cord Holder, Holster, Harness, Arm Band, Tool Bag, Shear Blade

- Z: Without Charger & Battery


XPT

DUP361 VIDEO CLIP Models and specs may vary by country

Max Output Keluaran Maksima 最大输出	200W
Capacity Kapasiti 能力	Max Cutting : 33mm Max Blade Opening: 54mm
Cutting Torque Tork Pemotongan 切割扭矩	185N
Dimensions (L x W x H) Dimensi 体积	305x43x106mm (12"x1-11/16"x4-3/16")
Net Weight Keberatan 净重	0.8kg (1.8lbs)
Work Amount (approx.) Jumlah Kerja 工作量	71,000cuts with BL1850B x2 (ø15mm Grape Wine Branch)

Cordless Multi Function Power Head

Powerhead Pelbagai Fungsi Tanpa Kord
充电式多功能动力机

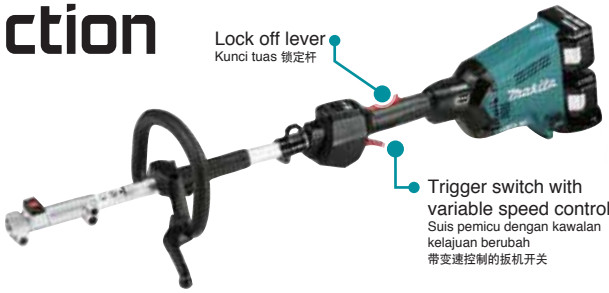

Max Output
Keluaran maksimum
最大输出
0.6kW

BL MOTOR
Motor tanpa berus
无碳刷马达

XPT EXTREME PROTECTION TECHNOLOGY
Teknologi Perlindungan Ekstrim
防尘防水滴技术

AFT
Active Feedback Sensing Technology
Teknologi Sensor Maklum Balas Automatik
自动回顾感应科技

Brushcutter
Mesin potong rumput 割草器
*EM400MP Part No. 195657-1
*EM403MP Part No. 198760-7
*UX01G / DUX60 only

Grass Trimmer
Mesin potong rumput 割草器
EM408MP Part No. 191N34-9
EM409MP Part No. 191N46-2

Power brush
Pembersih berus 毛刷清扫器
BR400MP
Part No. 199323-2

Power sweep
Penyapu lantai 地面扫除器
SW400MP
Part No. 199344-4

Coffee harvester
Penuai Kopi 咖啡豆采收器
EJ400MP
Part No. 197163-2

Pole saw
Batang gergaji 高枝链锯
EY401MP Part No. 199925-4
EY403MP Part No. 191T41-8

Edger
Kemasan tepi 草坪修边机具
EE400MP
Part No. 196752-0

Rotary scissors
Mesin potong rumput 割草器
EM407MP
Part No.191M57-1

Blower
Penghembus angin 吹风机组
UB400MP Part No. 191F68-4
UB401MP Part No. 191P75-7

Ground trimmer
Pemangkas tanaman 地面修剪器
EN420MP (Angle adjustable)
Part No. 198061-3

Hedge trimmer
Pemangkas tanaman 篱笆修剪器
EN410MP (Straight)
Part No. 197742-6

Pole hedge trimmer
Pemangkas tanaman 篱笆修剪器
EN401MP (Angle adjustable)
Part No. 196341-1

Shaft extension attachment
Penyambung alat 延伸杆
LE400MP Part No. 191E23-0
Length: 1,080mm (42-1/2")
for Pole saw, Pole hedge trimmer and Coffee harvester

Cultivator
Penggembur 耕耘器
KR400MP Part No. 195716-1
KR401MP Part No. 199185-8

DUX60ZM3 | DUX60Z
DUX60ZM3: RM 2,488 | DUX60Z: RM 1,973

Cordless Multi Function Power Head
Powerhead Pelbagai Fungsi Tanpa Kord
充电式多功能动力机



- **Multi-tool system consisting of power head and versatile optional attachments is ideal for a wide range of applications**



Standard Equipment: Band Assembly, Hex Wrench, Accessory Bag
DUX60ZM3: Brushcutter Attachment EM403, Nylon Cutting Head, 3 Tooth Blade, 3 Tooth Blade Cover, Tool bag, Box Wrench 17, Metal Blade Fixing Tool (Clamp Washer, Nut, Cup)

- ZM3: Without Charger & Battery
- Z: Without Charger & Battery


BL MOTOR XPT AFT

DUX60 VIDEO CLIP Models and specs may vary by country

Max Output Keluaran Maksima 最大输出	600W
No Load Speed (RPM) Kelajuan Tanpa Beban 回转速	High: 0 - 9,700 | Med: 0 - 8,200 | Low: 0 - 5,700
Dimensions (L x W x H) Dimensi 体积	1,011x320x216mm (39-3/4"x12-5/8"x8-1/2")
Net Weight Berat Bersih 净重	4.1 - 8.7kg (8.9 - 19.2lbs)
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	Low: 97 min | Med: 35 min | High: 21 min with BL1850B x2 Grass Trimmer

DLM533Z 530mm (21")
RM 7,292

Cordless Lawn Mower
Mesin Pemotong Rumput Tanpa Kord
充电式手推割草机



- **Aluminum die-cast deck does not rust even if scratched or damaged**



Standard Equipment: Blade, Mulch Plug, Socket Wrench, Rod

- Z: Without Charger & Battery

BL MOTOR XPT

Max Output Keluaran Maksima 最大输出	1,600W
Cutting Width Lebar Keratan 切割宽度	534mm (21")
Cutting Height Ketinggian Pemotongan 切割高度	20 - 100mm (13/16 - 3-15/16")
Grass Box Capacity Kapasiti Kotak Rumput 草箱容量	70L
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	Standard Mode: 2,300 / 2,800 Low Noise Mode: 2,300
Propelling Speed Kelajuan Mendorong 推进速度	2.5 - 5.0 km/h
Dimensions (L x W x H) Dimensi 体积	1,655-1,740x590x990-1,100mm (65-68-1/2x23-1/4x39-43-1/4")
Net Weight Berat Bersih 净重	42.8 - 46.7kg (94.4 - 103lbs.)
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	40 min (Self-Propelled) with BL1860B x2

***All list price shown are for reference only (exclude SST).**
*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V X2 36V LXT®

Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DLM532Z 530mm (21")
RM 6,563

Cordless Lawn Mower
Mesin Pemotong Rumput
Tanpa Kord
充电式手推割草机



- **IPX4 water resistant for use in bad weather**



Standard Equipment: Blade, Mulch plug, Side Discharge Mouth, Socket Wrench, Rod

- Z: Without Charger & Battery

BL MOTOR XPT

Max Output Keluaran Maksima 最大输出	**1,600W**
Cutting Width Lebar Keratan 切割宽度	**534mm (21")**
Cutting Height Ketinggian Pemotongan 切割高度	**20 - 100mm (13/16" - 3-15/16")**
Grass box capacity Kapasiti Kotak Rumput 草箱容量	**70L**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,300 - 2,800**
Dimensions (L x W x H) Dimensi 体积	**1,630-1,715x590x990-1,095mm (64"-67-1/2"x23-1/4"x39"-43")**
Net Weight Berat Bersih 淨重	**39.0 - 42.8kg (86.0 - 94.4lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**40 min (self-propelled) | 54 min (push-drive) with BL1860B x2**

DLM539Z 530mm (21")
RM 5,415

Cordless Lawn Mower
Mesin Pemotong Rumput
Tanpa Kord
充电式手推割草机



- **4 in 1 (Cutting/ Collecting/ Mulching/ Rear discharge) & water-resistant cutting deck**



Standard Equipment:
Blade, Mulching Plug, Socket Wrench, Rod


- Z: Without Charger & Battery

XPT

Max Output Keluaran Maksima 最大输出	**860W**
Cutting Width Lebar Keratan 切割宽度	**534mm (21")**
Cutting Height Ketinggian Pemotongan 切割高度	**20 - 100mm (13/16 - 3-15/16")**
Grass Box Capacity Kapasiti Kotak Rumput 草箱容量	**70L**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,000**
Dimensions (L x W x H) Dimensi 体积	**1,810-1,870x580x920-1,040mm (71-1/4-73-1/2x23x36-1/4-41")**
Net Weight Berat Bersih 淨重	**28.0 - 30.5kg (61.7 - 67.2lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**22 min (Self-Propelled) | 25 min (Push-Drive) with BL1860B x2**

DLM480Z 480mm (18-7/8")
RM 3,828

Cordless Lawn Mower
Mesin Pemotong Rumput
Tanpa Kord
充电式手推割草机



- **4 in 1 (Cutting/ Collecting/ Mulching/ Rear discharge) & water-resistant cutting deck**



Standard Equipment:
Blade, Mulching Plug, Wrench, Rod

- Z: Without Charger & Battery

XPT

Max Output Keluaran Maksima 最大输出	**860W**
Cutting Width Lebar Keratan 切割宽度	**480mm (18-7/8")**
Cutting Height Ketinggian Pemotongan 切割高度	**20 - 100mm (13/16 - 3-15/16")**
Grass Box Capacity Kapasiti Kotak Rumput 草箱容量	**62L**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,100**
Dimensions (L x W x H) Dimensi 体积	**1,690-1,740x530x930-1,060mm (66-1/2-68-1/2x20-7/8x36-5/8-41-3/4")**
Net Weight Berat Bersih 淨重	**24.5 - 26.8kg (54.0 - 59.1lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Mowing Area 800m² (Push-Drive) or 28 min (Push-Drive) with BL1860B x2**

DLM460Z 460mm (18")
RM 3,743

Cordless Lawn Mower
Mesin Pemotong Rumput
Tanpa Kord
充电式手推割草机



- **IPX4 water resistant for use in bad weather**



Standard Equipment: Blade, Socket Wrench

- Z: Without Charger & Battery

BL MOTOR SOFT NO LOAD

Max Output Keluaran Maksima 最大输出	**1,450W**
Cutting Width Lebar Keratan 切割宽度	**460mm (18")**
Cutting Height Ketinggian Pemotongan 切割高度	**20 - 75mm (13/16" - 2-15/16")**
Grass Box Capacity Kapasiti Kotak Rumput 草箱容量	**60L**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,500 - 3,300**
Recommended Mowing Area Julat Memotong Yang Disyorkan 推荐的割草范围	**With BL1850B x2: 680 - 1,360m²**
Dimensions (L x W x H) Dimensi 体积	**1,319-1,518 x 532 x 879-1,138mm (52"-59-3/4" x 21" x 34-1/2"-44-3/4")**
Net Weight Berat Bersih 淨重	**25.3 - 27.6kg (55.8 - 60.8lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**18 min with BL1850B x2**

DLM432PT2 RM 4,047 | DLM432Z 430mm (17") RM 2,460

Cordless Lawn Mower
Mesin Pemotong Rumput
Tanpa Kord
充电式手推割草机



- **Low noise level suitable for use in residential areas and public spaces**



Standard Equipment: Blade, Mulch Plug, Socket Wrench

- PT2: 1x Two Port Multi Fast Charger, 2x 5.0Ah Battery
- Z: Without Charger & Battery

XPT

Max Output Keluaran Maksima 最大输出	**950W**
Cutting Width Lebar Keratan 切割宽度	**430mm (17")**
Cutting Height Ketinggian Pemotongan 切割高度	**20 - 75mm (13/16" - 2-15/16")**
Grass Box Capacity Kapasiti Kotak Rumput 草箱容量	**50L**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,600**
Dimensions (L x W x H) Dimensi 体积	**1,435-1,490x460x1,005-1,045mm (56-1/2"-58-3/4"x18-1/8"x39-1/2"-41-1/4")**
Net Weight Berat Bersih 淨重	**16.8 - 17.5kg (37.0 - 38.6lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**30 min with BL1850B x2**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V X2 36V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DLM431PT2 | DLM431Z 430mm (17")

RM 4,457 | RM 2,872

Cordless Lawn Mower
Mesin Pemotong Rumput
Tanpa Kord
充电式手推割草机



- **Large 50L capacity grass basket reduces the need for emptying**

Standard Equipment: Blade, Socket Wrench

- PT2: 1x Two Port Multi Fast Charger, 2x 5.0Ah Battery
- Z: Without Charger & Battery



Max Output Keluaran Maksima 最大输出	**730W**
Cutting Width Lebar Keratan 切割宽度	**430mm (17")**
Cutting Height Ketinggian Pemotongan 切割高度	**20 - 75mm (13/16" - 2-15/16")**
Grass Box Capacity Kapasiti Kotak Rumput 草箱容量	**50L**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,600**
Dimensions (L x W x H) Dimensi 体积	**1,450-1,490x460x950-1,020mm (57-58-3/4"x18-1/8"x37-1/2"-40-1/4")**
Net Weight Keberatan 净重	**17.8 - 18.4kg (39.2 - 40.6lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**30 min with BL1850B x2**

DLM382PT2 | DLM382CM2 | DLM382Z 380mm (15")

RM 3,408 | RM 3,248 | RM 1,823

Cordless Lawn Mower
Mesin Pemotong Rumput
Tanpa Kord
充电式手推割草机



- **Zero emissions and reduced maintenance; no need for gas or oil**

Standard Equipment: Blade, Mulch Plug, Socket Wrench

- PT2: 1x Two Port Multi Fast Charger (DC18RD), 2x 5.0Ah Battery
- CM2: 1x Two Port Multi Charger (DC18SH), 2x 4.0Ah Battery
- Z: Without Charger & Battery



Max Output Keluaran Maksima 最大输出	**900W**
Cutting Width Lebar Keratan 切割宽度	**380mm (15")**
Cutting Height Ketinggian Pemotongan 切割高度	**20 - 75mm (13/16" - 2-15/16")**
Grass Box Capacity Kapasiti Kotak Rumput 草箱容量	**40L**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,700**
Dimensions (L x W x H) Dimensi 体积	**1,380-1,410x450x985-1,005mm (54-1/4"-55-1/2"x17-3/4"x38-3/4"-39-1/2")**
Net Weight Berat Bersih 净重	**16.2 - 16.9 kg (35.7 - 37.3 lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**36 min with BL1860B x2**

DLM380Z 380mm (15")

RM 2,290

Cordless Lawn Mower
Mesin Pemotong Rumput
Tanpa Kord
充电式手推割草机



- **Zero emissions and reduced maintenance**

Standard Equipment: Blade, Wrench

- Z: Without Charger & Battery



Max Output Keluaran Maksima 最大输出	**620W**
Cutting Width Lebar Keratan 切割宽度	**380mm (15")**
Cutting Height Ketinggian Pemotongan 切割高度	**25 - 75mm (1" - 2-15/16")**
Grass Box Capacity Kapasiti Kotak Rumput 草箱容量	**40L**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,700**
Dimensions (L x W x H) Dimensi 体积	**1,145x465x1,023-1,070mm (45"x18-1/4"x40-1/4"-42")**
Net Weight Keberatan 净重	**14.5kg (32.0lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**30 min with BL1850B x2**


Model	Deck	Self-Propelled	BL MOTOR	Battery slots	Cutting	Collecting	Mulching	Rear discharge	Side discharge
DLM533	Aluminum	✓	✓	4	✓	✓	✓	✓	
DLM532	Steel	✓	✓	4	✓	✓	✓		✓
DLM539	Plastic	✓		2	✓	✓	✓	✓	
DLM480	Plastic			2	✓	✓	✓	✓	
DLM460	Steel		✓	2	✓	✓	✓		
DLM432	Plastic			2	✓	✓	✓*		
DLM431	Plastic			2	✓	✓			
DLM382	Plastic			2	✓	✓	✓*		
DLM380	Plastic			2	✓	✓			

* Optional accessory for Mulching (DLM432 / DLM382)

DUA301ZB

RM 3,082

Cordless Telescopic Pole Saw
Gergaji Rantai Teleskopik
Tanpa Kord
充电式无刷伸缩式高枝链锯



- **The chain speed is the same or higher than competing models, enabling comfortable cutting**

Standard Equipment:
Saw Chain, Guide Bar, Guide Bar Case, Wrench, Band Assembly (191K37-5), Hex Wrench, Round File, Safety Goggles (195246-2), Chain Oil

- ZB: Without Charger & Battery



Guide Bar Length Panjang Bar Panduan 导板长度	**300mm (12")**
Max Output Keluaran Maksima 最大输出	**Normal Mode: 1,000W Torque Boost Mode: 1,400W**
Oil Tank Capacity Tangki Minyak Pelincir 链油箱	**160mL**
Saw Chain Rantai 链条	**Gauge: 1.1 / 1.3mm (0.043 / 0.050") Pitch: 9.5mm (3/8")**
Chain Speed Kelajuan Rantai 链条速度	**0 - 20.0m/s (0 - 1,200m/min) (0 - 3,940FPM)**
Dimensions (L x W x H) Dimensi 体积	**2,826-4,058x155x191mm (111-160x6-1/8x7-1/2")**
Net Weight Berat Bersih 净重	**7.8 - 8.5kg (17.2 - 18.7lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**238 cuts with BL1860B x2 100 x 100 Cedar square timber**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V X2 36V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DUA300ZB
RM 2,533

Cordless Pole Saw
Gergaji Rantai Teleskopik Tanpa Kord
充电式无刷高枝链锯





- **The chain speed is the same or higher than competing models, enabling comfortable cutting**

Standard Equipment:
Saw Chain, Guide Bar, Guide Bar Case, Wrench, Band Assembly (191K37-5), Round File, Safety Goggles (195246-2), Chain Oil

- ZB: Without Charger & Battery

Guide Bar Length Panjang Bar Panduan 导板长度	300mm (12")
Max Output Keluaran Maksima 最大输出	Normal Mode: 1,000W Torque Boost Mode: 1,400W
Oil Tank Capacity Tangki Minyak Pelincir 链油箱	160mL
Saw Chain Rantai 链条	Gauge: 1.1 / 1.3mm (0.043 / 0.050") Pitch: 9.5mm (3/8")
Chain Speed Kelajuan Rantai 链条速度	0 - 20.0m/s (0 - 1,200m/min) (0 - 3,940FPM)
Dimensions (L x W x H) Dimensi 体积	2,478x155x191mm (97-1/2x6-1/8x7-1/2")
Net Weight Berat Bersih 净重	6.1 - 6.9kg (13.5 - 15.2lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	238 cuts with BL1860B x2 100 x 100 Cedar square timber

DUC406Z 400mm (16")
RM 3,160

Cordless Chain Saw
Gergaji Rantai Tanpa Kord
充电式链锯





- **Low noise level and zero emissions for operator comfort**

Standard Equipment: Saw Chain, Guide Bar, Guide Bar Cover, Chain Oil, Socket Wrench

- Z: Without Charger & Battery

Guide Bar Length Panjang Bar Panduan 导板长度	400mm (16")
Chain Pitch Kerapatan Rantai 链条齿距	9.5mm (3/8")
Chain Gauge Ketebalan Rantai 链条厚度	1.3mm (0.05")
Chain Speed Kelajuan Rantai 链条速度	0 - 20m/s (0 - 1,200 m/min) (0 - 3,940 FPM)
Chain Oil Tank Volume Tangki Minyak Pelincir 链油箱	200mL (6.8US oz)
Dimensions (L x W x H) Dimensi 体积	270-651x205x232mm (10-5/8"-25-5/8"x8-1/8"x9-1/8")
Net Weight Berat Bersih 净重	5.1kg (11.1lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	500 cuts with BL1850B x2 50 x 50 mm Cedar timber

DUC356Z 350mm (14")
RM 2,162

Cordless Chain Saw
Gergaji Rantai Tanpa Kord
充电式链锯





- **Low noise level and zero emissions for operator comfort**

Standard Equipment: Saw Chain, Guide Bar, Guide Bar Cover, Spike Bumper, Chain Oil, Socket Wrench

- Z: Without Charger & Battery

Guide Bar Length Panjang Bar Panduan 导板长度	350mm (14")
Chain Pitch Kerapatan Rantai 链条齿距	9.5mm (3/8")
Chain Gauge Ketebalan Rantai 链条厚度	1.1(0.043") or 1.3mm (0.050")
Chain Speed Kelajuan Rantai 链条速度	0 - 20m/s (0 - 1,200 m/min) (0 - 3,940 FPM)
Chain Oil Tank Volume Tangki Minyak Pelincir 链油箱	200mL (6.8US oz)
Dimensions (L x W x H) Dimensi 体积	270-651x205x232mm (10-5/8"-25-5/8"x8-1/8"x9-1/8")
Net Weight Berat Bersih 净重	5.1kg (11.1lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	500 cuts with BL1850B x2 50 mm Timber

DUC355Z 350mm (14")
RM 2,110

Cordless Chain Saw
Gergaji Rantai Tanpa Kord
充电式链锯





- **Constant speed control maintains constant speed under heavy load**

Standard Equipment: Saw Chain, Guide Bar, Guide Bar Cover, Chain Oil, Socket Wrench

- Z: Without Charger & Battery

Guide Bar Length Panjang Bar Panduan 导板长度	350mm (14")
Chain Pitch Kerapatan Rantai 链条齿距	9.5mm (3/8")
Chain Gauge Ketebalan Rantai 链条厚度	1.1mm (0.043")
Chain Speed Kelajuan Rantai 链条速度	0 - 20m/s (0 - 1,200m/min) (0 - 3,940 FPM)
Chain Oil Tank Volume Tangki Minyak Pelincir 链油箱	200mL (6.8US oz)
Dimensions (L x W x H) Dimensi 体积	762x211x235mm (30"x8-5/16"x9-1/4")
Net weight Berat Bersih 净重	4.7 - 5.4kg (10.4 - 11.8lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	550 cuts with BL1850B x2 50 mm Timber

DUC353Z 350mm (14")
RM 2,237

Cordless Chain Saw
Gergaji Rantai Tanpa Kord
充电式链锯





- **Cordless Chain Saw DUC353 Efficiency Similar to 30ml Class Engine Chain Saw**

DUC353 VIDEO CLIP Models and specs may vary by country

Standard Equipment:
Saw Chain, Guide Bar, Guide Bar Cover, Chain Oil

- Z: Without Charger & Battery

Guide Bar Length Panjang Bar Panduan 导板长度	350mm (14")
Chain Pitch Kerapatan Rantai 链条齿距	9.5mm (3/8")
Chain Gauge Ketebalan Rantai 链条厚度	1.1 (0.043") or 1.3mm (0.050")
Chain Speed Kelajuan Rantai 链条速度	0 - 20m/s (0 - 1,200m/min) (0 - 3,940FPM)
Chain Oil Tank Volume Tangki Minyak Pelincir 链油箱	200mL (6.8US oz)
Dimensions (L x W x H) Dimensi 体积	773x215x235mm (30-1/2"x8-1/2"x9-1/4")
Net Weight Keberatan 净重	4.7kg (10.4 lbs)
Work Amount (approx.) Jumlah Kerja 工作量	550 cuts with BL1850B x2 50 mm Timber

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。


18V X2 36V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DUC252PM4 | DUC252Z 250mm (10")

442

RM 4,275 | RM 2,032

Cordless Chain Saw
Gergaji Rantai Tanpa Kord
充电式链锯



- **Low noise level and zero emissions for operator comfort**

Standard Equipment: Saw Chain (196205-9), Guide Bar (168408-5), Guide Bar Cover (455284-9), Spike Bumper

- PM4: 1x Two Port Multi Rapid Charger, 4x 4.0Ah Battery, 1x Tool Bag
- Z: Without Charger & Battery



DUC252PM4 Sementara stok masih ada 售完即止 WHILE STOCK LAST

Guide Bar Length Panjang Bar Panduan 导板长度	**250mm (10")**
Chain Pitch Kerapatan Rantai 链条齿距	**9.5mm (3/8")**
Chain Gauge Ketebalan Rantai 链条厚度	**1.3mm (0.050")**
Chain Speed Kelajuan Rantai 链条速度	**8.3m/s (500m/min) (1,650FPM)**
Chain Oil Tank Volume Tangki Minyak Pelincir 链油箱	**85mL (2.9US oz)**
Dimensions (L x W x H) Dimensi 体积	**545x234x198mm (21-1/2"x9-1/4"x7-3/4")**
Net Weight Keberatan 净重	**4.1 - 4.7kg (9.0 - 10.3lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**560 cuts with BL1850B x2 50 mm Timber**

Model	Standard Equipment					Optional Accessories					
	Guide Bar		Saw Chain		Bar Cover	Guide Bar		Saw Chain		Bar Cover	Drive Sprocket
DUA301/ DUA300	30cm/ 12" sprocket nose bar	165200-0	12"/ 1.3mm/ 0.050" 3/8" 46Links	196206-7	419288-5	30cm/ 12" sprocket nose bar	191G23-2	12"/ 1.3mm/ 0.050" 3/8" 46Links	196206-7	419288-5	226992-7
DUC406	40cm/ 16" Sprocket nose bar	165247-4	16"/ 1.1mm/ 0.043" 3/8" 56Links	196742-3	419242-9	40cm/ 16" Sprocket nose bar	191G17-7	16"/ 1.1mm/ 0.043" 3/8" 56Links	196742-3	419242-9	199063-2
DUC356/ DUC355/ DUC353	35cm/ 14" Sprocket nose bar	165246-6	14"/ 1.1mm/ 0.043" 3/8" 46Links	196741-5	419288-5	35cm/ 14" Sprocket nose bar	191G16-9	14"/ 1.1mm/ 0.043" 3/8" 46Links	196741-5	419288-5	199063-2
DUC254	25cm/ 10" sprocket nose bar	161846-0	10"/ 1.1mm/ 0.043" 3/8" 40Links	199075-5	458501-6	25cm/ 10" sprocket nose bar	191G14-3	10"/ 1.1mm/ 0.043" 3/8" 40Links	199075-5	458501-6	199063-2

DUH651Z 650mm (25-1/2")

442

RM 1,942

Cordless Hedge Trimmer
Pemangkas Tanaman Pagar Tanpa Kord
充电式篱笆树剪



- **5-Position rotating rear handle for increased comfort during vertical and angle trimming**

Standard Equipment: Blade Cover

- Z: Without Charger & Battery



Blade Length Panjang bilah 刀片长度	**650mm (25-1/2")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**2,000 - 3,600**
Tooth Spacing Selang Gigi 牙齿间隔	**36mm (1-7/16")**
Dimensions (L x W x H) Dimensi 体积	**1,135x225x200mm (44-3/4"x8-7/8"x7-7/8")**
Net Weight Keberatan 净重	**4.7 - 5.5kg (10.3 - 12.0lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**75 - 125 min with BL1850B x2**

DUB363ZV

RM 2,790

Cordless Blower
Mesin Penghembus Angin Tanpa Kord
充电式吹风机



- **Able to use both in Blower and Vacuuming applications**

Standard Equipment: Vacuum Kit, End Nozzle, Pipe, Hex Wrench

- ZV: Without Charger & Battery



Max Air Volume Isipadu Angin Maksimum 最大风量	**13.4m³/min (473 CFM)**
Max Air Velocity Velositi Angin Maksimum 最大风速	**65m/s**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 7,850**
Dimensions (L x W x H) Dimensi 体积	**737/786/836x193x415mm (7-7/16"/31"/33"x7-5/8"x16-3/8")**
Net Weight Berat Bersih 淨重	**4.5 - 6.6kg (9.9 - 14.6lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**75 min (Mode 1) | 9.5 min (Mode 2) with BL1860B x2**

VIDEO CLIP
Models and specs may vary by country
DUB363

DUB362RT2 | DUB362RM2 | DUB362Z

RM 3,577 | RM 3,432 | RM 2,292

Cordless Blower
Mesin Penghembus Angin Tanpa Kord
充电式吹风机



- **6-stage air velocity/volume selection dial with variable speed control trigger**

Standard Equipment: Front Nozzle (455914-2)

- RT2: 1x Rapid Charger, 2x 5.0Ah Battery
- RM2: 1x Rapid Charger, 2x 4.0Ah Battery
- Z: Without Charger & Battery



Max Air Volume Isipadu Angin Maksimum 最大风量	**13.4m³/min (473CFM)**
Max Air Velocity Velositi Angin Maksimum 最大风速	**54m/s (120MPH)**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,400 - 21,500**
Dimensions (L x W x H) Dimensi 体积	**830/880/930x205x295mm (32-3/4"/34-3/4"/36-5/8"x8-1/8"x11-5/8")**
Net Weight Berat Bersih 淨重	**3.5 - 4.2kg (7.7 - 9.3lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**75 min with BL1850B x2 (Speed 1)**

***All list price shown are for reference only (exclude SST).**


*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V X2 36V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DUB361Z
RM 1,092

430 m³/min

Cordless Blower
Mesin Penghembus Angin Tanpa Kord
充电式吹风机



- **Long blowing nozzle with curved tip for optimal blowing performance**



Standard Equipment: Shoulder Belt, Nozzle

- Z: Without Charger & Battery

Max Air Volume Isipadu Angin Maksimum 最大风量	**High: 4.4m³/min (155CFM)** **Low: 2.6m³/min (92CFM)**
Max Air Velocity Velositi Angin Maksimum 最大风速	**High: 93m/s (208MPH)** **Low: 57m/s (128MPH)**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 17,000** **Low: 10,000**
Dimensions (L x W x H) Dimensi 体积	**905x141x194mm** **(35-5/8"x5-5/8"x7-5/8")**
Net Weight Berat Bersih 净重	**2.6kg (5.9lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 92 min | High: 30 min** **with BL1850B x2**

Cordless Earth Auger

Mesin Gerudi Tanah Tanpa Kord 充电式无刷弯角度地钻头

Reversing switch
enables to extract, in reverse rotation mode, an auger bit jammed in soil with high resistance like clay soil.
Suis putaran terbalik dalam mod putaran terbalik dapat mengeluarkan bit auger yang tersumbat dalam tanah yang berintangan tinggi seperti tanah liat
反向开关可在反向旋转模式下提取堵塞在高阻力土壤如粘土中的螺旋钻头



Torque limiter
The torque limiter will actuate when a certain torque level is reached at the low speed setting. The motor will disengage from the output shaft. When this happens, the drill bit will stop turning.
Pembatas tork
Pembatas tork akan aktif apabila tahap tork tertentu dicapai pada tetapan kelajuan rendah. Motor akan terlepas dari output syaf. Apabila ini berlaku, bit gerudi akan berhenti berpusing.
扭矩限制器
在低速设置下达到一定扭矩水平时，扭矩限制器将启动。 马达将与输出轴分离。 发生这种情况时，钻头将停止旋转。




For larger holes
Untuk lubang yang lebih besar 对于更大的孔

Light weight
Ringan 轻量
8.2kg
with BL1860B x2
6.0Ah Battery

*Jumlah Kerja 工作量
Work Amount
with BL1860 x2
(ø150mm, 600mm depth)
155holes
(approx.)

DDG460ZX7
RM 5,252

Cordless Earth Auger
Mesin Gerudi Tanah Tanpa Kord
充电式弯角度地钻头



- **Auger bit adapter enables to use the auger bits for popular engine earth augers**



Standard Equipment:
Chuck Key, Hex Wrench x3 Types, Adapter A (327684-2), Adapter D (327687-6), Handle Set

- ZX7: Without Charger & Battery

Come with
AdapterA (327684-2)
AdapterD (327687-6)

Capacity Kapasiti 能力	**Sandy Soil: 200mm** **Clay Soil: 150mm**
Chuck Capacity Kapasiti Chuck 夹头能力	**2 - 13mm (5/64 - 1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,400 | Low: 0 - 350**
Max Fastening Torque Pemutaran Tenaga Maksimum 最大扭力	**High: 48N·m (430in.lbs.)** **Low: 136N·m (1,210in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**840x607x223mm** **(33x23-7/8x8-3/4")**
Net Weight Berat Bersih 净重	**7.3 - 8.2kg (16.1 - 18.1lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**155 holes with BL1860B x2** **ø150 mm, 600 mm depth**

***All list price shown are for reference only (exclude SST).**
*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V X2 36V LXT®

Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

Cordless High Pressure Washer

Pembersih Tekanan Tinggi Tanpa Kord 充电式高压清洗机



Accessories (Optional)

Aksesori 配件



Cyclone jet nozzle set (Optional)
Part No. 197824-4



Cyclone guard set (Optional)
Part No. 197864-2





Variospray lance set (Optional)
Part No. 197876-5





Foam nozzle set
(Optional)
Part No. 197886-2





Wash brush set (Optional)
Part No. 197828-6





Variable nozzle set
Part No. 197822-8






Rotating brush set (Optional)
Part No. 197831-7





Under body spray lance set
(Optional)
Part No. 197859-5





Pipe cleaning hose
(Optional)
Part No.
10m 197837-5
15m 197840-6



Accessory joint set
(Optional)
Part No. 197853-7



Extension pipe set (Optional)
Part No. 197870-7



Trigger gun set
Part No. 197842-2



High pressure extension hose (Optional)
Part No.
5m 197845-6
8m 197847-2
10m 197850-3



High pressure hose
(Optional)
Part No.
5m 126766-5 (PVC)
10m 123784-4 (PVC)
10m 123651-3 (Rubber)



Twist prevention joint set (Optional)
Part No.
197867-6





Trolley (Optional)
Part No. TR00000002
able to stack on for easy loading



Absorption connector set (Optional)
Part No. 197881-2



One touch joint set
Part No. 197883-8





Self-suction hose set
Part No. 197873-1






DHW080ZK

RM 3,463

Cordless High Pressure Washer
Pembersih Tekanan Tinggi Tanpa Kord
充电式高压清洗机



- **High/ Low 2-pressure selection**



Standard Equipment: Trigger Gun, High Pressure Hose 5m, Suction Hose, Cleaner Pin, Storage Box, Variable Nozzle, Connector, One Touch Joint

- ZK: Without Charger & Battery

BL MOTOR

Max Permissible Pressure Tekanan Maksimum 最大水压	**8.0MPa**
Regular Pressure Tekanan Tetap 固定压力	**High: 5.5MPa | Low: 3.0MPa**
Max Water Flow Aliran Air Maksimum 最大水流量	**380L/h (6.3L/min)**
Regular Flow Aliran Air Tetap 固定水流量	**High: 330L/h (5.5L/min)** **Low: 240L/h (4.0L/min)**
Pump Speed (RPM) Kelajuan Pam 水泵速度	**High: 3,450 | Low: 2,390**
Max Feed Temperature Suhu Maksimum 最高温度	**40°C**
Tank Kapasiti 容量	**50L**
Dimensions (L x W x H) Dimensi 体积	**438x218x269mm** **(17-1/4"x8-5/8"x10-5/8")**
Net Weight Berat Bersih 淨重	**7.1 - 7.7kg (15.6 - 17.0lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 34 min | High: 15 min** **with BL1860B x2**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

Cordless Driver Drill

Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



DDF486RTE | DDF486Z 13mm (1/2")

DDF486RTE RM 2,762 | DDF486Z RM 1,477

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻





- **Increased performance in continuous heavy-duty applications**

Standard Equipment: Side Handle, Belt Clip, (+)(-) Bit, Bit Holder

- RTE: 1x Rapid Charger, 2x 5.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood (Auger-Bit): 50mm (2")** **Wood (Hole Saw): 152mm (6")** **Siding Board: 170mm (6-11/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 2,100 | Low: 0 - 550**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**Hard: 130N·m (1,150in.lbs.) | Soft: 65N·m (580in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**125N·m (1,100in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**178x81x265mm (7x3-3/16x10-3/8")**
Net Weight Berat Bersih 淨重	**2.3 - 2.6kg (5.1 - 5.7lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**710 holes with BL1850B** **Wood bit ø21mm (30mm thick melapi)** **High Speed**

DDF487RAJ | DDF487Z 13mm (1/2")

DDF487RAJ RM 1,670 | DDF487Z RM 768

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻





- **Compact design at only 150 mm long for increased operability**

Standard Equipment: Belt Clip, (+)(-) Bit

- RAJ: 1x Rapid Charger, 2x 2.0Ah Battery, 1x Makpac Connector Box
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood (Hole Saw): 51mm (2")** **Wood (Self-Feed Bit): 35mm (1-3/8")** **Wood (Auger Bit): 36mm (1-7/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,700 | Low: 0 - 500**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**Hard: 40N·m (350in.lbs.) | Soft: 25N·m (220in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**40N·m (350in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**150x81x248mm (5-7/8x3-3/16x9-3/4")**
Net Weight Berat Bersih 淨重	**1.3 - 1.6kg (2.9 - 3.5lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**640 holes with BL1820B** **Wood bit ø9mm (30mm thick melapi)** **High Speed**

***All list price shown are for reference only (exclude SST).**


*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DDF481RTE | DDF481RME | DDF481RFE | DDF481Z 13mm (1/2")

RM 2,762 | RM 2,615 | RM 2,452 | RM 1,477

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻





- **21 Clutch settings and drill mode for added fastening control**

Standard Equipment: Side Grip, Belt Clip, (+)(-) Bit, Bit Holder

- RTE: 1x Rapid Charger, 2x 5.0Ah Battery
- RME: 1x Rapid Charger, 2x 4.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

BL MOTOR XPT

Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 76mm (3")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 2,100 | Low: 0 - 550**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**Hard: 115N·m (1,020in.lbs.) | Soft: 60N·m (530in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**125N·m (1,090in.lbs.)**
Max Output Keluaran Maksima 最大输出	**640W**
Dimensions (L x W x H) Dimensi 体积	**205x79x266mm (8-1/8"x3-1/8"x10-1/2")**
Net Weight Berat Bersih 淨重	**2.7 - 3.0kg (5.9 - 6.6lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**630 holes with BL1850B** **Wood bit ø21mm (25mm thick Lauan)**

DDF458RME | DDF458RFE | DDF458Z 13mm (1/2")

RM 2,138 | RM 1,973 | RM 998

440

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻





- **Mechanical 2-speed transmission covers a wide range of drilling and fastening applications**

Standard Equipment: Side Grip, (+)(-) Bit, Belt Clip, Bit Holder

- RME: 1x Rapid Charger, 2x 4.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

XPT


Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 76mm (3")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0-2,000 | Low: 0-400**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**Hard: 91N·m | Soft: 58N·m**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**84N·m (750in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**225x79x259mm (8-7/8"x3-1/8"x10-1/4")**
Net Weight Berat Bersih 淨重	**2.1 - 2.5kg (4.7 - 5.4lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**500 holes with BL1850B** **Wood bit ø21mm (25mm thick Lauan)**

DDF482RME | DDF482RFE | DDF482Z 13mm (1/2")

RM 1,833 | RM 1,670 | RM 695

440

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻





- **High speed model with compact and lightweight design**

Standard Equipment: Belt Clip, (+)(-) Bit

- RME: 1x Rapid Charger, 2x 4.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

XPT

Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 38mm (1-1/2")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,900 | Low: 0 - 600**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**Hard: 62N·m (550in.lbs.) | Soft: 36N·m (320in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**54N·m (480in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**185x79x249mm (7-1/4"x3-1/8"x9-3/4")**
Net Weight Berat Bersih 淨重	**1.5 - 1.8kg (3.2 - 4.0lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**781 holes with BL1850B** **Brad Point Wood bit ø8mm (1" Depth Mixed wood)**

DDF484RTE | DDF484RME | DDF484RFE | DDF484Z 13mm (1/2")

RM 2,262 | RM 2,117 | RM 1,952 | RM 978

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻





- **Delivers 25% more drilling, driving and fastening speed**

Standard Equipment: Belt Clip, (+)(-) Bit

- RTE: 1x Rapid Charger, 2x 5.0Ah Battery
- RME: 1x Rapid Charger, 2x 4.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

BL MOTOR XPT

Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 38mm (1-1/2")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 2,000 | Low: 0 - 500**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**Hard: 54N·m (480in.lbs.) | Soft: 30N·m (270in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**60N·m (530in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**172x79x261mm (6-3/4"x3-1/8"x10-1/4")**
Net Weight Berat Bersih 淨重	**1.5 - 1.8kg (3.3 - 4.0lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**1550 holes with BL1850B** **Wood bit ø9mm (30mm thick Lauan)**

DDF485RFE | DDF485Z 13mm (1/2")

RM 1,760 | RM 785

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻





- **Variable 2-speed for a wide range of drilling and fastening applications**

Standard Equipment: Belt Clip, (+)(-) Bit

- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

BL MOTOR XPT

Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 38mm (1-1/2")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0- 1,900 | Low: 0 - 500**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**Hard: 50N·m (440in.lbs) | Soft: 27N·m (240in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**50N·m (440in.lbs.)**
Max Output Keluaran Maksima 最大输出	**350W**
Clutch Torque Setting Tetapan Pemutaran 扭转设置	**1.0 - 5.0N·m (9 - 44in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**169x79x255mm (7-1/8"x3-1/8"x10")**
Net Weight Berat Bersih 淨重	**1.4 - 1.7kg (3.1 - 3.8lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**1400 pcs with BL1850B** **Auger Bit ø15mm (30mm thick Melapi)**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DDF459RME | DDF459Z 13mm (1/2")

RM 1,853 | RM 713

Cordless Driver Drill

Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻





- **Brushless motor delivers up to 50% longer run time per charge**

Standard Equipment: Belt Clip, (+)(-) Bit

- RME: 1x Rapid Charger, 2x 4.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 38mm (1-1/2")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,500 | Low: 0 - 400**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**Hard: 45N·m (400in.lbs.) |** **Soft: 25N·m (220in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**45N·m (400in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**179x78x256mm** **(7"x3-1/16"x10-1/8")**
Net Weight Berat Bersih 淨重	**1.4 - 1.7kg (3.1 - 3.8lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**1470 pcs with BL1850B** **Auger Bit ø15mm** **(30mm thick Melapi)**

DDF453RME | DDF453RFE | DDF453SYE | DDF453Z 13mm (1/2")

RM 1,643 | RM 1,478 | RM 1,343 | RM 503

Cordless Driver Drill

Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻





- **All metal gear construction ensures high transmission durability**

Standard Equipment: (+)(-) Bit

- RME: 1x Rapid Charger, 2x 4.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- SYE: 1x Standard Charger, 2x 1.5Ah Battery
- Z: Without Charger, Battery, Bit & Carrying Case

*Not applicable for Z model

Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 36mm (1-7/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0-1,300 | Low: 0-400**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**Hard: 42N·m | Soft: 27N·m**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**38N·m (340in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**222x79x244mm** **(8-3/4"x3-1/8"x9-5/8")**
Net Weight Berat Bersih 淨重	**1.7 - 2.0kg (3.7 - 4.4lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**720 pcs with BL1850B** **Wood screw ø4.1 x 38mm**

DDF483RTE | DDF483RME | DDF483RFE | DDF483Z 13mm (1/2")

RM 2,052 | RM 1,907 | RM 1,743 | RM 768

Cordless Driver Drill

Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻





DDF483RTE Sementara stok masih ada 售完即止 WHILE STOCK LAST

- **BL motor delivers 40N·m of max torque**

Standard Equipment: Belt Clip, (+)(-) Bit

- RTE: 1x Rapid Charger, 2x 5.0Ah Battery
- RME: 1x Rapid Charger, 2x 4.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 36mm (1-7/16")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,700 | Low: 0 - 500**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**Hard: 40N·m (350in.lbs.) |** **Soft: 23N·m (210in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**40N·m (350in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**162x79x247mm** **(6-3/8"x3-1/8"x9-3/4")**
Net Weight Berat Bersih 淨重	**1.2 - 1.6kg (2.7 - 3.4lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**1666 pcs with BL1850B** **Wood Bit ø9mm** **(30mm thick Lauan)**

DDF083RTE | DDF083RFE | DDF083Z 13mm (1/2")

RM 2,007 | RM 1,698 | RM 722

Cordless Driver Drill

Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻





- **Mechanical 2-speed transmission covers a wide range of drilling and fastening applications**

Standard Equipment: Belt Clip, Phillips Bit

- RTE: 1x Rapid Charger, 2x 5.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 36mm (1-7/16")**
Chuck Capacity Kapasiti Chuck 夹头能力	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,700 | Low: 0 - 500**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**Hard: 40N·m (350in.lbs.) |** **Soft: 23N·m (210in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**40N·m (350in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**124x79x247mm** **(4-7/8"x3-1/8"x9-3/4")**
Net Weight Berat Bersih 淨重	**1.1 - 1.4kg (2.4 - 3.0lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**1666 pcs with BL1850B** **Wood Bit ø9mm** **(30mm thick Lauan)**

Model No. 型号	Capacity Kapasiti 能力		No Load Speed (rpm) Kelajuan Tanpa Beban 回转数	Mechanical Speed Mekanikal Kelajuan 机械速度	Torque Setting Tetapan Pemutaran 扭转设置	Max. Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	Overall Length (mm) Panjang Keseluruhan 总长度	Net Weight Berat Bersih 淨重	BL MOTOR	XPT
	Steel	Wood								
DDF486	13mm	76mm	0-2,100 / 0-550	2 Speed	21	Hard: 130 / Soft: 65	178	2.3kg (5.1lbs)	●	●
DDF481	13mm	76mm	0-2,100 / 0-550	2 Speed	21	Hard: 115 / Soft: 60	205	2.7kg (5.9lbs)	●	●
DDF458	13mm	76mm	0-2,000 / 0-400	2 Speed	21	Hard: 91 / Soft: 58	225	2.1kg (4.7lbs)		●
DDF482	13mm	38mm	0 - 1,900 / 0 - 600	2 Speed	21	Hard: 62 / Soft: 36	185	1.5kg (3.2lbs)		●
DDF484	13mm	38mm	0-2,000 / 0-500	2 Speed	21	Hard: 54 / Soft: 30	172	1.5kg (3.3lbs)	●	●
DDF485	13mm	38mm	0-1,900 / 0-500	2 Speed	21	Hard: 50 / Soft: 27	169	1.4kg (3.1lbs)	●	●
DDF459	13mm	38mm	0-1,500 / 0-400	2 Speed	16	Hard: 45 / Soft: 25	179	1.4kg (3.1lbs)	●	
DDF453	13mm	36mm	0-1,300 / 0-400	2 Speed	16	Hard: 42 / Soft: 27	222	1.7kg (3.7lbs)		
DDF487	13mm	36mm	0-1,700 / 0-500	2 Speed	20	Hard: 40 / Soft: 25	150	1.3kg (2.9lbs)	●	●
DDF483	13mm	36mm	0-1,700 / 0-500	2 Speed	20	Hard: 40 / Soft: 23	162	1.2kg (2.7lbs)	●	●
DDF083	13mm	36mm	0-1,700 / 0-500	2 Speed	20	Hard: 40 / Soft: 23	124	1.1kg (2.4lbs)	●	●

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

BRUSHLESS MOTOR
Motor tanpa berus 无碳刷马达

- Maintenance-free due to no brush
- Life time work amount of a battery is increased
- Durable against long continuous operation
- More work amount on a single full battery charge

penyelenggaraan mudah tanpa proses penggantian berus karbon
Alat yang menggunakan motor berus BL tidak mengalami geseran haba, dengan itu menjadikan bateri lebih tahan lama
免却更换碳刷的麻烦工序，保养轻松简单
采用BL无碳刷马达的工具没有因摩擦热导致的能量流失，所以每次充电后的连续工作时间更长



BRUSHED MOTOR
Motor dengan berus 有刷马达

- High power-to-weight ratio obtained by employing 4 -pole motor

Berkuasa tinggi dengan motor 4-pole
采用4极马达, 高功率

4-POLE MOTOR | 2-POLE MOTOR



Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力 Soft Joint	Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力 Hard Joint	Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力 Soft Joint
DHP486 3 2 1 Cordless Hammer Driver Drill Tukul Pemutar Skru Bergerudi tanpa Kord 充电式冲击螺丝起子电钻 **DDF486** 2 1 Cordless Driver Drill Gerudi Pemutar Skru tanpa Kord 充电式螺丝起子电钻 BL MOTOR XPT 21 Torque Setting	65 N·m 60 N·m	130 N·m
DHP481 3 2 1 Cordless Hammer Driver Drill Tukul Pemutar Skru Bergerudi tanpa Kord 充电式冲击螺丝起子电钻 **DDF481** 2 1 Cordless Driver Drill Gerudi Pemutar Skru tanpa Kord 充电式螺丝起子电钻 BL MOTOR XPT 21 Torque Setting	115 N·m	**DHP458** 3 2 1 Cordless Hammer Driver Drill Tukul Pemutar Skru Bergerudi tanpa Kord 充电式冲击螺丝起子电钻 **DDF458** 2 1 Cordless Driver Drill Gerudi Pemutar Skru tanpa Kord 充电式螺丝起子电钻 XPT 4-POLE MOTOR 21 Torque Setting 58 N·m 91 N·m
DHP484 3 2 1 Cordless Hammer Driver Drill Tukul Pemutar Skru Bergerudi tanpa Kord 充电式冲击螺丝起子电钻 **DDF484** 2 1 Cordless Driver Drill Gerudi Pemutar Skru tanpa Kord 充电式螺丝起子电钻 BL MOTOR XPT 21 Torque Setting 30 N·m		36 N·m
DHP485 3 2 1 Cordless Hammer Driver Drill Tukul Pemutar Skru Bergerudi tanpa Kord 充电式冲击螺丝起子电钻 **DDF485** 2 1 Cordless Driver Drill Gerudi Pemutar Skru tanpa Kord 充电式螺丝起子电钻 BL MOTOR XPT 21 Torque Setting 27 N·m	54 N·m	**DHP482** 3 2 1 Cordless Hammer Driver Drill Tukul Pemutar Skru Bergerudi tanpa Kord 充电式冲击螺丝起子电钻 **DDF482** 2 1 Cordless Driver Drill Gerudi Pemutar Skru tanpa Kord 充电式螺丝起子电钻 XPT 4-POLE MOTOR 21 Torque Setting 62 N·m
DHP459 3 2 1 Cordless Hammer Driver Drill Tukul Pemutar Skru Bergerudi tanpa Kord 充电式冲击螺丝起子电钻 **DDF459** 2 1 Cordless Driver Drill Gerudi Pemutar Skru tanpa Kord 充电式螺丝起子电钻 BL MOTOR XPT 16 Torque Setting 25 N·m 25 N·m	50 N·m 45 N·m	27 N·m
DHP487 3 2 1 Cordless Hammer Driver Drill Tukul Pemutar Skru Bergerudi tanpa Kord 充电式冲击螺丝起子电钻 **DDF487** 2 1 Cordless Driver Drill Gerudi Pemutar Skru tanpa Kord 充电式螺丝起子电钻 BL MOTOR XPT 20 Torque Setting 23 N·m	40 N·m 40 N·m	**DHP453** 3 2 1 Cordless Hammer Driver Drill Tukul Pemutar Skru Bergerudi tanpa Kord 充电式冲击螺丝起子电钻 **DDF453** 2 1 Cordless Driver Drill Gerudi Pemutar Skru tanpa Kord 充电式螺丝起子电钻 2-POLE MOTOR 16 Torque Setting 42 N·m
DHP483 3 2 1 Cordless Hammer Driver Drill Tukul Pemutar Skru Bergerudi tanpa Kord 充电式冲击螺丝起子电钻 **DDF483 | DDF083** 2 Cordless Driver Drill Gerudi Pemutar Skru tanpa Kord 充电式螺丝起子电钻 BL MOTOR XPT 20 Torque Setting DDF083 6.35mm (1/4") Hex chuck		

*All list price shown are for reference only (exclude SST).

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

Cordless Hammer Driver Drill

Tukul Pemutar Skru Bergerudi Tanpa Kord

充电式冲击螺丝起子电钻



BL MOTOR
Motor tanpa berus
无碳刷马达

XPT EXTREME PROTECTION TECHNOLOGY
Teknologi Perlindungan Ekstrim
防尘防水滴技术

Max Lock Torque
Pemutaran Tenaga Maksimum
最大锁紧扭力
40N·m

Light Weight
Berat Bersih 淨重
1.4kg

Compact

Predecessor Model
176mm
DHP487
164mm





Twin LED job light with preglow and afterglow functions
Lampu kerja LED berganda dengan fungsi pencahayaan pra dan pencahayaan
具有预发光和余辉功能的双LED工作灯



Variable speed control trigger
Pencetus kawalan kelajuan
触发控制变速



Mechanical 2-speed gearing
Transmisi 2-kelajuan mekanikal
机械2速变速箱

DHP487RAJ | DHP487Z 13mm (1/2")

RM 1,718 | RM 817

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



- **Compact design at only 164mm long for increased operability**



Standard Equipment: Belt Clip, (+)(-) Bit

- RAJ: 1x Rapid Charger, 2x 2.0Ah Battery, 1x Makpac Connector Box
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Capacity Kapasiti 能力	**Steel: 13mm (1/2") | Masonry: 13mm (1/2")** **Wood (Self-Feed Bit): 35 mm (1-3/8")** **Wood (Auger Bit): 36 mm (1-7/16")** **Wood (Hole Saw): 51 mm (2")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13 mm (1/16 - 1/2")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High: 0 - 25,500 | Low: 0 - 7,500**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,700 | Low: 0 - 500**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**Hard: 40N·m (350 in.lbs.) |** **Soft: 25N·m (220 in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**40N·m (350in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**164x81x248mm** **(6-1/2x3-3/16x9-3/4")**
Net Weight Berat Bersih 淨重	**1.4 - 1.7kg (3.1 - 3.7lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**640 holes with BL1820B** **Wood bit ø9mm (30mm thick melapi) High Speed**

DHP486RTE | DHP486Z 13mm (1/2")

RM 2,817 | RM 1,532

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



- **Increased performance in continuous heavy-duty applications**



Standard Equipment: Depth Gauge, Side Handle, Belt Clip, (+)(-) Bit, Bit Holder

- RTE: 1x Rapid Charger, 2x 5.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Capacity Kapasiti 能力	**Siding Board: 170mm (6-11/16")** **Wood (Auger-Bit): 50mm (2")** **Wood (Hole Saw): 152mm (6")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High: 0 - 31,500 | Low: 0 - 8,250**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 2,100 | Low: 0 - 550**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**Hard: 130N·m (1,150in.lbs.) |** **Soft: 65N·m (580in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**125N·m (1,100in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**178x81x265mm** **(7x3-3/16x10-3/8")**
Net Weight Berat Bersih 淨重	**2.3 - 2.7kg (5.1 - 6.0lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**710 holes with BL1850B** **Wood bit ø21mm (30mm thick melapi)** **High Speed**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DHP481RTE | DHP481RFE | DHP481Z 13mm (1/2")

RM 2,817 | RM 2,507 | RM 1,532

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



- **0-31,500 IPM for fast hammer drilling in masonry materials**

Standard Equipment: Depth Gauge, Side Grip, Belt Clip, (+)(-) Bit, Bit Holder

- RTE: 1x Rapid Charger, 2x 5.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

VIDEO CLIP Models and specs may vary by country
DHP481



*Not applicable for Z model

BL MOTOR XPT

Capacity Kapasiti 能力	**Steel: 13mm (1/2") Wood: 76mm (3") Masonry: 16mm (5/8")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High: 0 - 31,500 | Low: 0 - 8,250**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 2,100 | Low: 0 - 550**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**Hard: 115N·m (1,020in.lbs.) | Soft: 60N·m (530in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**125N·m (1,090in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**205x79x249mm (8-1/8"x3-1/8"x9-3/4")**
Net Weight Berat Bersih 淨重	**2.7 - 3.0kg (6.0 - 6.7lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**630 pcs with BL1850B** Wood Screw ø21 x 25mm

DHP458RME | DHP458RFE | DHP458Z 13mm (1/2")

RM 2,188 | RM 2,023 | RM 1,048

440

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



- **All metal gears and aluminum gear housing for maximum jobsite durability**

Standard Equipment: (+)(-) Bit, Side Grip, Depth Rod, Bit Holder

- RME: 1x Rapid Charger, 2x 4.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case



*Not applicable for Z model

XPT

Capacity Kapasiti 能力	**Steel: 13mm (1/2") Wood: 76mm (3") Masonry: 16mm (5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0-2,000 | Low: 0-400**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High: 0-30,000 | Low: 0-6,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**Hard: 91N·m | Soft: 58N·m**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**84N·m (750in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**225x79x259mm (8-7/8"x3-1/8"x10-1/4")**
Net Weight Berat Bersih 淨重	**2.2 - 2.6kg (4.9 - 5.7lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**500 pcs with BL1850B** Wood Screw ø9 x 25mm

DHP482RME | DHP482RFE | DHP482Z 13mm (1/2")

RM 1,870 | RM 1,707 | RM 732

440

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



- **High speed model with compact and lightweight design**

Standard Equipment: Belt Clip, (+)(-) Bit

- RME: 1x Rapid Charger, 2x 4.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case



*Not applicable for Z model

XPT

Capacity Kapasiti 能力	**Steel: 13mm (1/2") Wood: 38mm (1-1/2") Masonry: 13mm (1/2")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High: 0 - 28,500 | Low: 0 - 9,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,900 | Low: 0 - 600**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**Hard: 62N·m (550 in.lbs) | Soft: 36N·m (320 in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**54N·m (480in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**198x79x249mm (7-3/4"x3-1/8"x9-3/4")**
Net Weight Berat Bersih 淨重	**1.5 - 1.8kg (3.4 - 4.1lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**781 holes with BL1850B** Brad Point Wood Bit ø8mm (1" Depth Mixed wood)

DHP484RME | DHP484RFE | DHP484Z 13mm (1/2")

RM 2,173 | RM 2,008 | RM 1,033

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



- **0-30,000 IPM for fast hammer drilling in masonry materials**

Standard Equipment: Belt Clip, (+)(-) Bit

- RME: 1x Rapid Charger, 2x 4.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case



*Not applicable for Z model

BL MOTOR XPT

Capacity Kapasiti 能力	**Steel: 13mm (1/2") Wood: 38mm (1-1/2") Masonry: 13mm (1/2")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High: 0 - 30,000 | Low: 0 - 7,500**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 2,000 | Low: 0 - 500**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**Hard: 54 N·m (480 in.lbs.) | Soft: 30 N·m (270 in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**60N·m (530in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**182x79x261mm (7-1/8"x3-1/8"x10-1/4")**
Net Weight Berat Bersih 淨重	**1.6 - 1.9kg (3.5 - 4.2lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**1850 pcs with BL1850B** Wood Screw ø9 x 25mm

DHP485RFE | DHP485Z 13mm (1/2")

RM 1,795 | RM 820

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



- **All metal gear construction provides increased durability**

Standard Equipment: Belt Clip, (+)(-) Bit

- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case



*Not applicable for Z model

BL MOTOR XPT

Capacity Kapasiti 能力	**Steel: 13 (1/2") Wood: 38 (1-1/2") Masonry: 13mm (1/2")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High: 0 - 28,500 | Low: 0 - 7,500**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1900 | Low: 0 - 500**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**Hard: 50N·m (440in.lbs) | Soft: 27N·m (240in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**50N·m (440in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**182x79x255mm (7-1/8"x3-1/8"x10")**
Net Weight Berat Bersih 淨重	**1.5 - 1.8kg (3.2 - 3.9lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**1400 pcs with BL1850B** Auger Bit ø15mm (30mm thick Melapi)

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DHP459Z 13mm (1/2")
RM 745

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



- **Brushless motor delivers up to 50% longer run time per charge**



Standard Equipment: Belt Clip, (+)(-) Bit

- Z: Without Charger & Battery

Capacity Kapasiti 能力	**Steel: 13mm (1/2") Wood: 38mm (1-1/2") Masonry: 13mm (1/2")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High: 0 - 22,500 | Low: 0 - 6,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,500 | Low: 0 - 400**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**Hard: 45N·m (400in.lbs.) | Soft: 25N·m (220in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**45N·m (400in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**192x78x256mm (7-9/16"x3-1/16"x10-1/8")**
Net Weight Berat Bersih 淨重	**1.5 - 1.8kg (3.3 - 4.0lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**1470pcs with BL1850B Auger Bit ø15mm (30mm thick Melapi)**

DHP453RME | DHP453RFE | DHP453SYE | DHP453Z 13mm (1/2")
DHP453RME RM 1,692 | DHP453RFE RM 1,527 | DHP453SYE RM 1,393 | DHP453Z RM 552

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



- **16 Adjustable torque settings plus drill mode**



Standard Equipment: (+)(-) Bit


- RME: 1x Rapid Charger, 2x 4.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- SYE: 1x Standard Charger, 2x 1.5Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Capacity Kapasiti 能力	**Steel: 13mm (1/2") Wood: 36mm (1-7/16") Masonry: 13mm (1/2")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High: 0 - 19,500 | Low: 0 - 6,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,300 | Low: 0 - 400**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**Hard: 42N·m | Soft: 27N·m**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**38N·m (340in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**240x79x244mm (9-7/16"x3-1/8"x9-5/8")**
Net Weight Berat Bersih 淨重	**1.7 - 2.0kg (3.6 - 4.4lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**720pcs with BL1850B Wood Screw ø4.1 x 38mm**

DHP483RME | DHP483RFE | DHP483Z 13mm (1/2")
DHP483RME RM 1,957 | DHP483RFE RM 1,792 | DHP483Z RM 817

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



- **0-25,500 IPM for fast hammer drilling in masonry materials**



Standard Equipment: Belt Clip, (+)(-) Bit

- RME: 1x Rapid Charger, 2x 4.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Capacity Kapasiti 能力	**Steel: 13mm (1/2") Wood: 36mm (1-7/16") Masonry: 13mm (1/2")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High: 0 - 25,500 | Low: 0 - 7,500**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,700 | Low: 0 - 500**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**Hard: 40N·m (350 in.lbs.) | Soft: 23N·m (210 in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**40N·m (350in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**176x79x247mm (6-15/16"x3-1/8"x9-3/4")**
Net Weight Berat Bersih 淨重	**1.3 - 1.6kg (2.8 - 3.6lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**200pcs with BL1850B Wood screw ø6 x 75mm**

Model No. 型号	Capacity Kapasiti 能力			No Load Speed (rpm) Kelajuan Tanpa Beban 回转数	Impacts Per Minute (IPM) Impak Per Minit 冲击数	Torque Setting Tetapan Pemutaran 扭转设置	Max. Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	Overall Length (mm) Panjang Keseluruhan 总长度	Net Weight Berat Bersih 淨重	BL MOTOR	XPT
	Steel	Wood	Mansory								
DHP486	13mm	76mm	16mm	0-2,100 / 0-550	High: 0 - 31,500 / Low: 0 - 8,250	21	Hard: 130 / Soft: 65	178	2.3kg (5.1lbs)	●	●
DHP481	13mm	76mm	16mm	0-2,100 / 0-550	High: 0 - 31,500 / Low: 0 - 8,250	21	Hard: 115 / Soft: 60	205	2.7kg (6.0lbs)	●	●
DHP458	13mm	76mm	16mm	0-2,000 / 0-400	High: 0 - 30,000 / Low: 0 - 6,000	21	Hard: 91 / Soft: 58	225	2.2kg (4.9lbs)		●
DHP482	13mm	38mm	13mm	0 - 1,900 / 0 - 600	High: 0 - 28,500 / Low: 0 - 9,000	21	Hard: 62 / Soft: 36	198	1.5kg (3.4lbs)		●
DHP484	13mm	38mm	13mm	0-2,000 / 0-500	High: 0 - 30,000 / Low: 0 - 7,500	21	Hard: 54 / Soft: 30	182	1.6kg (3.5lbs)	●	●
DHP485	13mm	38mm	13mm	0-1,900 / 0-500	High: 0 - 28,500 / Low: 0 - 7,500	21	Hard: 50 / Soft: 27	182	1.5kg (3.2lbs)	●	●
DHP459	13mm	38mm	13mm	0-1,500 / 0-400	High: 0 - 22,500 / Low: 0 - 6,000	16	Hard: 45 / Soft: 25	192	1.5kg (3.3lbs)	●	
DHP453	13mm	36mm	13mm	0-1,300 / 0-400	High: 0 - 19,500 / Low: 0 - 6,000	16	Hard: 42 / Soft: 27	240	1.7kg (3.6lbs)		
DHP487	13mm	36mm	13mm	0-1,700 / 0-500	High: 0 - 25,500 / Low: 0 - 7,500	20	Hard: 40 / Soft: 25	164	1.4kg (3.1lbs)	●	●
DHP483	13mm	36mm	13mm	0-1,700 / 0-500	High: 0 - 25,500 / Low: 0 - 7,500	20	Hard: 40 / Soft: 23	176	1.3kg (2.8lbs)	●	●

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

BRUSHLESS MOTOR
Motor tanpa berus 无碳刷马达

- Maintenance-free due to no brush
- Life time work amount of a battery is increased
- Durable against long continuous operation
- More work amount on a single full battery charge

penyelenggaraan mudah tanpa proses penggantian berus karbon
Alat yang menggunakan motor berus BL tidak mengalami geseran haba, dengan itu menjadikan bateri lebih tahan lama
免却更换碳刷的麻烦工序，保养轻松简单
采用BL无碳刷马达的工具没有因摩擦热导致的能量流失，所以每次充电后的连续工作时间更长



BRUSHED MOTOR
Motor dengan berus 有刷马达

- High power-to-weight ratio obtained by employing 4 -pole motor

Berkuasa tinggi dengan motor 4-pole
采用4极马达，高功率


4-POLE MOTOR



Max Fastening Torque
Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力

180 N·m
175 N·m
170 N·m
165 N·m
155 N·m
140 N·m

A mode [assist mode]
helps to eliminate "screw cam-out" and "cross threading" by driving at low speed until the start of tightening.

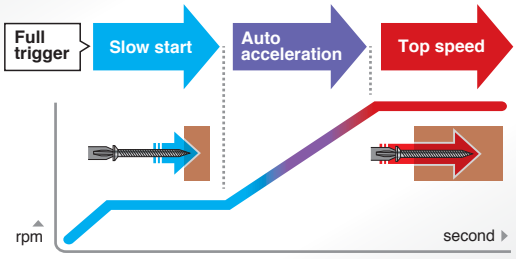

DTD171
Cordless Impact Driver
Pemutar Skru Impak tanpa Kord 充电式冲击螺丝起子机
BL MOTOR XPT
4 STAGE power selection + TEKS MODE
A + ⚙



DTD170
Cordless Impact Driver
Pemutar Skru Impak tanpa Kord 充电式冲击螺丝起子机
BL MOTOR XPT
4 STAGE power selection + TEKS MODE + A



DTD154
Cordless Impact Driver
Pemutar Skru Impak tanpa Kord 充电式冲击螺丝起子机
BL MOTOR XPT
3 STAGE power selection + TEKS MODE



DTD153
Cordless Impact Driver
Pemutar Skru Impak tanpa Kord 充电式冲击螺丝起子机
BL MOTOR XPT
Ideal for applications such as tightening of self-drilling screws



DTD155 | DTD157
Cordless Impact Driver
Pemutar Skru Impak tanpa Kord 充电式冲击螺丝起子机
BL MOTOR XPT
2 STAGE power selection + A



DTD149
Cordless Impact Driver
Pemutar Skru Impak tanpa Kord 充电式冲击螺丝起子机
XPT 4-POLE MOTOR



DTD152
Cordless Impact Driver
Pemutar Skru Impak tanpa Kord 充电式冲击螺丝起子机
XPT 4-POLE MOTOR
Ideal for applications such as tightening of self-drilling screws



DTD156
Cordless Impact Driver
Pemutar Skru Impak tanpa Kord 充电式冲击螺丝起子机
4-POLE MOTOR



DTS141
Cordless Oil-Pulse Driver
Pemutar Skru Impak tanpa Kord 充电式冲击起子机
BL MOTOR XPT
3 STAGE power selection + TEKS MODE
Suitable for noise sensitive job site

SOFT IMPACT
Low Noise 77dB
40 N·m



DTP141
Cordless 4 Mode Impact Driver
Pemutar Skru Impak tanpa Kord 充电式冲击螺丝起子机
BL MOTOR
3 STAGE power selection + TEKS MODE
4 Operation modes
Impact driver/ Hammer drill/ Drill/ Screwdriver

4 TOOLS: Hammer drill, Impact driver, Drill, Screwdriver
150 N·m



"Teks" mode is a special mode optimum for fast tightening of self drilling screws without damaging the screw and the workpiece.
"Teks" mod adalah mod khas yang optimum untuk mengetatkan skru penggerudian sendiri tanpa cepat merosakkan skru dan bahan kerja.
"Teks" 模式是一种特殊模式，可以在不损坏螺钉和工件的情况下快速拧紧自攻螺钉。

Teks mode

*All list price shown are for reference only (exclude SST).
*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DTD171RTJ | DTD171RFJ | DTD171Z

RM 2,762 | RM 2,452 | RM 1,477

Cordless Impact Driver

Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机





- **Ultra Compact and perfect balance at only 116mm long**

Standard Equipment: Belt Clip

- RTJ: 1x Rapid Charger, 2x 5.0Ah Battery, 1x Makpac Connector Box
- RFJ: 1x Rapid Charger, 2x 3.0Ah Battery, 1x Makpac Connector Box
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Capacity Kapasiti 能力	Machine Screw: M4 - M8 (5/32" - 5/16") Standard Bolt: M5 - M16 (3/16" - 5/8") High Tensile Bolt: M5 - M14 (3/16" - 9/16") Coarse thread (in length): 22 - 125mm (7/8" - 4-7/8")
Hex Shank Batang Heksagon 六角柄	6.35mm (1/4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	Max/ Hard/ Med/ Soft/ Wood/ Bolt/ T(1)/ T(2) mode: 0 - 3,600/ 3,200/ 2,100/ 1,100/ 1,800/ 3,600/ 2,900/ 3,600
Impacts Per Minute (IPM) Impak Per Minit 冲击数	Max/ Hard/ Med/ Soft/ Wood/ Bolt/ T(1)/ T(2) mode: 0 - 3,800/ 3,600/ 2,600/ 1,100/ 3,800/ 3,800/ N/A/ 2,600
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	180N·m (1,590in.lbs.)
Fastening Torque Tenaga Pemutaran Pengancing 扭力	Hard: 170N·m (1,510in.lbs.) | Med: 50N·m (440in.lbs.) | Soft: 20 N·m (180 in.lbs.)
Dimensions (L x W x H) Dimensi 体积	116x79x236mm (4-9/16"x3-1/8"x9-1/4")
Net Weight Berat Bersih 淨重	1.2 - 1.6kg (2.7 - 3.4lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	808 pcs with BL1850B Coarse thread screw 65mm

DTD170RME | DTD170RFE | DTD170Z

RM 2,553 | RM 2,390 | RM 1,415

Cordless Impact Driver

Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机





- **6-Mode operation for A-mode/ T-mode/ Max/ Hard/ Medium/ Soft impact mode for multiple applications**

Standard Equipment: Belt Clip

- RME: 1x Rapid Charger, 2x 4.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model


Capacity Kapasiti 能力	Machine Screw: M4 - M8 (5/32" - 5/16") Standard Bolt: M5 - M16 (3/16" - 5/8") High Tensile Bolt: M5 - M14 (3/16" - 9/16") Coarse Thread (in length): 22 - 125mm (7/8" - 4-7/8")
Hex Shank Batang Heksagon 六角柄	6.35mm (1/4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	Max: 0 - 3,600 | Hard: 3,200 | Med: 2,100 | Soft: 1,100 | T Mode: 3,600
Impacts Per Minute (IPM) Impak Per Minit 冲击数	Max: 0 - 3,800 | Hard: 3,600 | Med: 2,600 | Soft: 1,100 | T mode: 2,600
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	175N·m (1,550in.lbs.)
Dimensions (L x W x H) Dimensi 体积	117x79x236mm (4-5/8"x3-1/8"x9-1/4")
Net Weight Berat Bersih 淨重	1.2 - 1.5kg (2.7 - 3.4lbs)
Work Amount (approx.) Jumlah Kerja 工作量	808 pcs with BL1850B Coarse thread screw 65mm

DTD157RAJ | DTD157Z

RM 1,675 | RM 773

Cordless Impact Driver

Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机





- **3-mode operation for A-mode / Hard mode / Soft mode for multiple applications**

Standard Equipment: Belt Clip,
Double Ended Twist Torsion Screw Bit

- RAJ: 1x Rapid Charger, 2x 2.0Ah Battery, 1x Makpac Connector Box
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Capacity Keupayaan Pengancing 紧固能力	Machine Screw: M4 - M8mm (5/32 - 5/16") Standard Bolt: M5 - M14 (3/16 - 9/16") High Strength Bolt: M5 - M12 (3/16 - 1/2") Coarse thread (in length): 22 - 90mm (7/8 - 3-1/2")
Hex Shank Skru Persegi 方形螺杆	6.35mm (1/4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	Hard: 0 - 3,000 | Soft: 0 - 1,300
Impacts Per Minute (IPM) Impak Per Minit 冲击数	Hard: 0 - 4,100 | Soft: 0 - 2,000
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	140N·m (1,240in.lbs.)
Dimensions (L x W x H) Dimensi 体积	133x81x232mm (5-1/4x3-3/16x9-1/8")
Net Weight Berat Bersih 淨重	1.2 - 1.5kg (2.6 - 3.3lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	1200 pcs with BL1820B Coarse thread screw 90mm into melapi in hard impact mode

DTD154RME | DTD154RFE | DTD154Z

RM 2,127 | RM 1,963 | RM 988

Cordless Impact Driver

Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机





- **Aluminum hammer case creates the impression of rigidity of the machine**

Standard Equipment: Belt Clip

- RME: 1x Rapid Charger, 2x 4.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Capacity Kapasiti 能力	Machine Screw: M4 - M8 (5/32" - 5/16") Standard Bolt: M5 - M16 (3/16" - 5/8") High Tensile Bolt: M5 - M14 (3/16" - 9/16") Coarse Thread (in length): 22 - 125mm (7/8" - 4-7/8")
Hex Shank Batang Heksagon 六角柄	6.35mm (1/4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	0 - 3,600 | 0 - 2,100 | 0 - 1,100
Impacts Per Minute (IPM) Impak Per Minit 冲击数	0 - 3,800 | 0 - 2,600 | 0 - 1,100
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	175N·m (1,550in.lbs.)
Dimensions (L x W x H) Dimensi 体积	117x79x236mm (4-5/8"x3-1/8"x9-1/4")
Net Weight Berat Bersih 淨重	1.3 - 1.6kg (2.7 - 3.4lbs)
Work Amount (approx.) Jumlah Kerja 工作量	800 pcs with BL1850B Wood screw ø4.3 x 65mm

DTD153RTE | DTD153RFE | DTD153Z

RM 2,102 | RM 1,792 | RM 817

Cordless Impact Driver

Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机





- **Aluminum hammer case creates the impression of rigidity of the machine**

Standard Equipment: Belt Clip

- RTE: 1x Rapid Charger, 2x 5.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Capacity Kapasiti 能力	Machine Screw: M4 - M8 (5/32" - 5/16") Standard Bolt: M5 - M16 (3/16" - 5/8") High Tensile Bolt: M5 - M14 (3/16" - 9/16") Coarse Thread (in length): 22 - 125mm (7/8" - 4-7/8")
Hex Shank Batang Heksagon 六角柄	6.35mm (1/4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	0 - 3,400
Impacts Per Minute (IPM) Impak Per Minit 冲击数	0 - 3,600
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	170N·m (1,500in.lbs.)
Dimensions (L x W x H) Dimensi 体积	126x79x238mm (5"x3-1/8"x9-3/8")
Net Weight Berat Bersih 淨重	1.3 - 1.6kg (2.8 - 3.5lbs)
Work Amount (approx.) Jumlah Kerja 工作量	760 pcs with BL1850B Wood screw 65mm

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DTD149RFE | DTD149Z

RM 1,737 | RM 762

448

Cordless Impact Driver

Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机

- **Developed for main applications such as tightening of self-drilling screws or light duty machine screws**

Standard Equipment: Belt Clip

- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model



Capacity Kapasiti 能力	**Machine Screw: M4 - M8 (5/32" - 5/16")** **Standard Bolt: M5 - M14 (3/16" - 9/16")** **High Tensile Bolt: M5 - M12 (3/16" - 1/2")** **Coarse Thread (in length): 22 - 125mm (7/8" - 4-7/8")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,500**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,200**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**165N·m (1,460in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**135x79x238mm (5-5/16"x3-1/8"x9-3/8")**
Net Weight Berat Bersih 淨重	**1.3 - 1.6kg (2.8 - 3.5lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**533 pcs with BL1850B** **Wood screw ø4.3 × 65mm**

DTD152RME | DTD152RFE | DTD152Z

RM 1,902 | RM 1,737 | RM 762

448

Cordless Impact Driver

Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机



- **Aluminum hammer case creates the impression of rigidity of the machine**

Standard Equipment: Belt Clip

- RME: 1x Rapid Charger, 2x 4.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model



Capacity Kapasiti 能力	**Machine Screw: M4 - M8 (5/32" - 5/16")** **Standard Bolt: M5 - M16 (3/16" - 5/8")** **High Tensile Bolt: M5 - M12 (3/16" - 1/2")** **Coarse Thread (in length): 22 - 125mm (7/8" - 4-7/8")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,900**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,500**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**165N·m (1,460 in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**137x79x238mm (5-3/8"x3-1/8"x9-3/8")**
Net Weight Berat Bersih 淨重	**1.3 - 1.6kg (2.8 - 3.5lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**603 pcs with BL1850B** **Hex screw 3/4" (Hording sheet 0.23mm RHS 1.6mm)**


DTD156SF | DTD156Z

RM 1,002 | RM 353

5

Cordless Impact Driver

Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机



- **Compact, lightweight but powerful 4-pole motor**

Standard Equipment: Belt Clip

- SF: 1x Standard Charger, 1x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model



Capacity Kapasiti 能力	**Machine Screw: M4 - M8 (5/32" - 5/16")** **Standard Bolt: M5 - M14 (3/16" - 9/16")** **High Strength Bolt: M5 - M12 (3/16" - 1/2")** **Coarse Thread (in length): 22 - 125mm (7/8" - 4-7/8")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,500**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**155N·m (1,370in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**143x79x241mm (5-5/8"x3-1/8"x9-1/2")**
Net Weight Berat Bersih 淨重	**1.3 - 1.6kg (2.9 - 3.6lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**340 pcs with BL1830B** **Coarse thread screw 90mm into melapi**

DTD155RME | DTD155Z

RM 1,912 | RM 773

Cordless Impact Driver

Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机



- **3-Mode operation for A-mode / Hard mode / Soft mode for multiple applications**

Standard Equipment: Belt Clip

- RME: 1x Rapid Charger, 2x 4.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model



Capacity Kapasiti 能力	**Machine Screw: M4 - M8 mm (5/32" - 5/16")** **Standard Bolt: M5 - M14 (3/16" - 9/16")** **High Tensile Bolt: M5 - M12 (3/16" - 1/2")** **Coarse Thread (in length): 22 - 90mm (7/8" - 3-1/2")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Hard: 0 - 3,000 | Soft: 0 - 1,300**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Hard: 0 - 3,900 | Soft: 0 - 1,600**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**140N·m (1,240in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**135x79x232mm (5-5/16"x3-1/8"x9-1/8")**
Net Weight Berat Bersih 淨重	**1.2 - 1.5kg (2.6 - 3.2lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**725 pcs with BL1850B** **Coarse thread screw 65mm (melapi)**

DTP141RFE | DTP141Z

RM 2,975 | RM 2,000

Cordless 4 Mode Impact Driver

Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机



- **4 Operation Modes (Impact Driver, Hammer Drill, Drill, Screwdriver) and Teks Screw Mode selection**

Standard Equipment: Belt Clip

- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model



Capacity Kapasiti 能力	**Steel: 10mm (3/8")/ Wood: 21mm (13/16")** **Masonry: 8mm (5/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Impact-driver Mode:** **Hard: 0 - 2,700 | Medium: 0 - 2,200 | Soft: 0 - 1,300** **Drill Mode High: 0 - 2,700 | Low: 0 - 700** **Hammer Drill Mode High: 0 - 2,700 | Low: 0 - 700** **Screwdriver Mode High: 0 - 1,100 | Low: 0 - 300**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Impact-driver Mode** **(Hard: 0-3,200 | Medium: 0-2,400 | Soft: 0-1,200)** **Hammer Drill Mode (Hi: 0 - 32,400 | Lo: 0 - 8,400)**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**Impact-driver Mode:** **150N·m (1,330in.lbs.)** **Drill Mode (Hard/ Soft):** **22/ 13N·m**
Dimensions (L x W x H) Dimensi 体积	**171x79x250mm (6-3/4"x3-1/8"x9-7/8")**
Net Weight Berat Bersih 淨重	**1.5 - 1.9kg (3.4 - 4.1lbs)**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DTS141RFE | DTS141Z

RM 3,250 | RM 2,275

Cordless Oil-Pulse Driver

Pemutar Skru Impak Tanpa Kord
充电式冲击起子机





- **Low noise level of 77dB**

VIDEO CLIP
Models and specs may vary by country
DTS141

Standard Equipment: Belt Clip

- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Capacity Kapasiti 能力	**Machine Screw: M4 - M8 (5/32" - 5/16")** **Standard Bolt: M5 - M8 (3/16" - 5/16")** **High Tensile Bolt: M5 - M6 (3/16" - 1/4")** **Coarse Thread (in length): 22 - 125mm (7/8" - 4-7/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Hard: 0-3,200 | Medium: 0-2,000 | Soft: 0-1,200**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Hard: 0-2,700 | Medium: 0-2,200 | Soft: 0-1,400**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**40N·m (355in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**136x79x240mm** **(5-3/8"x3-1/8"x9-1/2")**
Net Weight Berat Bersih 淨重	**1.3 - 1.6kg (2.8 - 3.5lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**750 pcs with BL1850B** **Wood screw ø4.3 x 65mm**

Model No. 型号	No Load Speed (rpm) Kelajuan Tanpa Beban 回转数	Impacts Per Minute (IPM) Impak Per Minit 冲击数	Electronic Speed Kelajuan Elektronik 电子速度	Max. Fastening Torque (N.m) Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	Overall Length (mm) Panjang Keseluruhan 总长度	Net Weight Berat Bersih 淨重	BL MOTOR	XPT
Cordless Impact Driver								
DTD171	0 - 3,600/ 3,200/ 2,100/ 1,100/ 1,800/ 3,600/ 2,900/ 3,600	0 - 3,800/ 3,600/ 2,600/ 1,100/ 3,800/ 3,800/ N/A/ 2,600	4	180	116	1.2kg (2.7lbs)	●	●
DTD170	0 - 3,600/ 3,200/ 2,100/ 1,100/ 3,600	0 - 3,800/ 3,600/ 2,600/ 1,100/ 2,600	4	175	117	1.2kg (2.7lbs)	●	●
DTD154	0 - 3,600/ 0 - 2,100/ 0 - 1,100	0 - 3,800/ 0 - 2,600/ 0 - 1,100	3	175	117	1.3kg (2.7lbs)	●	●
DTD153	0 - 3,400	0 - 3,600	-	170	126	1.3kg (2.8lbs)	●	●
DTD149	0 - 2,500	0 - 3,200	-	165	135	1.3 kg (2.8lbs)		●
DTD152	0 - 2,900	0 - 3,500	-	165	137	1.3kg (2.8lbs)		●
DTD156	0 - 2,500	0 - 3,000	-	155	143	1.3kg (2.9lbs)		
DTD157	0 - 3,000/ 0 - 1,300	0 - 4,100/ 0 - 2,000	2	140	133	1.2kg (2.6lbs)	●	●
DTD155	0 - 3,000/ 0 - 1,300	0 - 3,900/ 0 - 1,600	2	140	135	1.2kg (2.6lbs)	●	●
Cordless 4 Mode Impact Driver (Impact-driver mode)								
DTP141	0-2,700/ 0-2,200/ 0-1,300	0-3,200/ 0-2,400/ 0-1,200	3	150	171	1.5kg (3.4lbs)	●	
Cordless Oil-Pulse Drive								
DTS141	0-3,200/ 0-2,000/ 0-1,200	0-2,700/ 0-2,200/ 0-1,400	3	40	136	1.3kg (2.8lbs)	●	●

DTL061Z

RM 1,127

Cordless Angle Impact Driver

Pemutar Skru Impak Sudut Tanpa Kord
充电式角向冲击螺丝起子机





- **360 degrees rotatable head enables operation from optimum angle**

Standard Equipment: Belt Clip

- Z: Without Charger & Battery

Capacity Kapasiti 能力	**Machine Screw: M4 - M8 (5/32" - 5/16")** **Standard Bolt: M4 - M12 (5/32" - 1/2")** **High Tensile Bolt: M4 - M8 (5/32" - 5/16")** **Coarse Thread (in length): 22 - 75mm (7/8" - 2-31/32")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,000**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**60N·m (530in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**387x78x116mm** **(15-1/4"x3-1/16"x4-9/16")**
Net Weight Berat Bersih 淨重	**1.4 - 2.0kg (3.1 - 4.3lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**350 pcs with BL1850B** **Wood Screw 4.2 x 65mm**

DDA450Z

RM 1,823

Cordless Angle Drill

Gerudi Sudut Tanpa Kord
充电式角向电钻





- **Compact and lightweight for increased maneuverability in various work postures and reduced user fatigue**

Standard Equipment:
Chuck Key, Chuck Key Holder, Side Grip, Hook, + Screw

- Z: Without Charger & Battery

Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood (Auger-Bit): 38mm (1-1/2")** **Wood (Hole Saw) Hi: 101mm (4")** **Wood (Hole Saw) Lo: 127mm (5")** **Wood (Self-Feed Bit) Hi: 50mm (2")** **Wood (Self-Feed Bit) Lo: 65mm (2-9/16")**
Chuck Capacity Kapasiti Chuck 夹头能力	**2 - 13mm (1/16 - 1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,400 | Low: 0 - 450**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**High: 26N·m (230in.lbs.)** **Low: 70N·m (620in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**434x82x179mm** **(17-1/8x3-1/4x7")**
Net Weight Berat Bersih 淨重	**3.2 - 3.5kg (7.1 - 7.7lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**125 holes with BL1860B** **2 layer of SPF 2 x 10 plate**

DDA351Z 10mm (3/8")

RM 1,132

440

Cordless Angle Drill

Gerudi Sudut Tanpa Kord
充电式角向电钻





- **Original 4-pole motor for power, lightweight and compact size**

Standard Equipment: Side Grip

- Z: Without Charger & Battery

Capacity Kapasiti 能力	**Steel: 10mm (3/8")** **Wood: 25mm (1")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0-1,800**
Dimensions (L x W x H) Dimensi 体积	**326x79x115mm** **(12-7/8"x3-1/8"x4-1/2")**
Net weight Berat Bersih 淨重	**1.6 - 1.9kg (4.2 - 3.5lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**1000 pcs with BL1850B** **Wood Screw ø5.1 x 38mm**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DFS452Z
RM 1,427

Cordless Screwdriver
Pemutar Skru Tanpa Kord
充电式螺丝起子机



- **Push Drive Technology for Quieter Operation; Minimizes Power Consumption**



Standard Equipment: Phillips Bit, Magnetic Bit Holder, Belt Clip

- Z: Without Charger & Battery

Capacity Kapasiti 能力	**Self-Drilling Screw: 6mm (1/4")** **Drywall Screw: 5mm (3/16")**
Driving Shank (Hex) Hex Memandu Aci 六角驱动轴	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 4,000**
Dimensions (L x W x H) Dimensi 体积	**251x79x259mm** **(10"x3-1/8"x11-1/4")**
Net weight Berat Bersih 淨重	**1.5 - 1.8kg (3.2 - 3.9lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**2325 pcs with BL1850B** **Wood Screw 1.0 x 32mm**

DFS250RTE | DFS250RFE | DFS250Z
RM 2,553 | RM 2,243 | RM 1,270

Cordless Screwdriver
Pemutar Skru Tanpa Kord
充电式螺丝起子机



- **Ultra-high efficiency comparable to AC screwdrivers**



Standard Equipment: Phillips Bit, Magnetic Bit Holder, Belt Clip

- RTE: 1x Rapid Charger, 2x 5.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Capacity Kapasiti 能力	**Coarse Thread: 4.5 x 90mm** **(3/16" x 3-1/2")** **Self-Drilling Screw: 6mm (1/4")** **Drywall Screw: 5mm (3/16")**
Driving Shank (Hex) Hex Memandu Aci 六角驱动轴	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,500**
Dimensions (L x W x H) Dimensi 体积	**259x79x259mm** **(10-1/4"x3-1/8"x10-1/4")**
Net weight Berat Bersih 淨重	**1.5 - 1.9kg (3.4 - 4.1lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**1091 pcs with BL1850B** **Wood Screw 8" x 1" (Pine Wood)**

DFS251RTE | DFS251RFE | DFS251Z
RM 2,553 | RM 2,243 | RM 1,270

Cordless Screwdriver
Pemutar Skru Tanpa Kord
充电式螺丝起子机



- **High torque ideal for fastening self-drilling screw**



Standard Equipment: Magnetic Socket Bit, Belt Clip

- RTE: 1x Rapid Charger, 2x 5.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case


*Not applicable for Z model

Capacity Kapasiti 能力	**Self-Drilling Screw: 6mm (1/4")** **Drywall Screw: 5mm (3/16")** **Hex Socket Screw: 6mm (1/4")**
Driving Shank (Hex) Hex Memandu Aci 六角驱动轴	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,500**
Dimensions (L x W x H) Dimensi 体积	**237x79x259mm** **(9-3/8"x3-1/8"x11-1/4")**
Net weight Berat Bersih 淨重	**1.5 - 1.8kg (3.2 - 3.9lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**1091 pcs with BL1850B** **Wood Screw 8" x 1" (Pine Wood)**

DFR550Z
RM 1,452

440

Cordless Auto Feed Screwdriver
Pemutar Skru Suapan Auto Tanpa Kord
充电式自动螺丝起子机



- **Ideal for drywall and subfloors**



Standard Equipment: Phillips Bit x3

- Z: Without Charger & Battery

Screw Strip Kapasiti 能力	**4 x 25 - 55mm (5/32" x 1" - 2-3/16")**
Driving Shank (Hex) Hex Memandu Aci 六角驱动轴	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**4,000**
Dimensions (L x W x H) Dimensi 体积	**424x80x238mm** **(16-3/4"x3-1/8"x9-3/8")**
Net weight Berat Bersih 淨重	**2.1 - 3.1kg (4.6 - 6.9lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**1166 pcs with BL1850B** **Wood Screw 35mm (1-3/8)** **(plasterboard into Douglas-fir timber)**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

BRUSHLESS MOTOR
Motor tanpa berus 无碳刷马达

- Maintenance-free due to no brush
- Life time work amount of a battery is increased
- Durable against long continuous operation
- More work amount on a single full battery charge

penyelenggaraan mudah tanpa proses penggantian berus karbon
Alat yang menggunakan motor berus BL tidak mengalami geseran haba, dengan itu menjadikan bateri lebih tahan lama
免却更换碳刷的麻烦工序，保养轻松简单
采用BL无碳刷马达的工具没有因摩擦热导致的能量流失，所以每次充电后的连续工作时间更长



BRUSHED MOTOR
Motor dengan berus 有刷马达

- High power-to-weight ratio obtained by employing 4 -pole motor

Berkuasa tinggi dengan motor 4-pole
采用4极马达, 高功率

4-POLE MOTOR | 2-POLE MOTOR



Max Fastening Torque
Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力

1050 | 1000 | 800 | 400 | 300 | 200 | 100

DTW1001
Square drive size 19mm (3/4")
Cordless Impact Wrench
Perengkuh Impak tanpa Kord 充电式冲击套筒扳手
BL MOTOR
Standard M12 - 30 | High Strength M10 - 24
1,050 N·m

DTW1002
Square drive size 12.7mm (1/2")
Cordless Impact Wrench
Perengkuh Impak tanpa Kord 充电式冲击套筒扳手
BL MOTOR
Standard M12 - 30 | High Strength M10 - 24
1,000 N·m

DTW800
Square drive size 11.2mm (7/16")
Cordless Impact Wrench
Perengkuh Impak tanpa Kord 充电式冲击套筒扳手
BL MOTOR
Standard M12 - 24 | High Strength M10 - 22
800 N·m

DTW700 / DTW701
Square drive size 12.7mm (1/2")
Cordless Impact Wrench
Perengkuh Impak tanpa Kord 充电式冲击套筒扳手
BL MOTOR XPT
Standard M10 - 24 | High Strength M10 - 16
700 N·m

DTW300 / DTW301
Square drive size 12.7mm (1/2")
Reverse Rotation Auto Stop Mode
Cordless Impact Wrench
Perengkuh Impak tanpa Kord 充电式冲击套筒扳手
BL MOTOR XPT
Standard M10 - 20 | High Strength M10 - 16
330 N·m

DTW302
Square drive size 9.5mm (3/8")
Reverse Rotation Auto Stop Mode
Cordless Impact Wrench
Perengkuh Impak tanpa Kord 充电式冲击套筒扳手
BL MOTOR XPT
Standard M10 - 20 | High Strength M10 - 16
300 N·m

DTW285
Square drive size 12.7mm (1/2")
Reverse Rotation Auto Stop Mode
Cordless Impact Wrench
Perengkuh Impak tanpa Kord 充电式冲击套筒扳手
BL MOTOR XPT
Standard M10 - 20 | High Strength M10 - 16
280 N·m

DTW181
Square drive size 12.7mm (1/2")
Cordless Impact Wrench
Perengkuh Impak tanpa Kord 充电式冲击套筒扳手
BL MOTOR XPT
Standard M8 - 16 | High Strength M6 - 12
210 N·m

DTW180
Square drive size 9.5mm (3/8")
Cordless Impact Wrench
Perengkuh Impak tanpa Kord 充电式冲击套筒扳手
BL MOTOR XPT
Standard M8 - 16 | High Strength M6 - 12
180 N·m

DTW450
Cordless Impact Wrench
Perengkuh Impak tanpa Kord 充电式冲击套筒扳手
4-POLE MOTOR
Standard M12 - 22 | High Strength M12 - 16
Square drive size 12.7mm (1/2")
440 N·m



DTW251
Cordless Impact Wrench
Perengkuh Impak tanpa Kord 充电式冲击套筒扳手
4-POLE MOTOR
Standard M10 - 16 | High Strength M10 - 14
Square drive size 12.7mm (1/2")
230 N·m



DTW190
Cordless Impact Wrench
Perengkuh Impak tanpa Kord 充电式冲击套筒扳手
2-POLE MOTOR
Standard M8 - 16 | High Strength M8 - 12
Square drive size 12.7mm (1/2")
190 N·m



*All list price shown are for reference only (exclude SST).
*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DTW1001RTJ | DTW1001RMJ | DTW1001RFJ | DTW1001Z 19mm (3/4")

RM 3,633 | RM 3,487 | RM 3,323 | RM 2,348

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手



C ring



- **Makita's Most Powerful Impact Wrench**

Standard Equipment: Hook

- RTJ : 1x Rapid Charger, 2x 5.0Ah Battery, 1x Makpac Connector Box
- RMJ : 1x Rapid Charger, 2x 4.0Ah Battery, 1x Makpac Connector Box
- RFJ : 1x Rapid Charger, 2x 3.0Ah Battery, 1x Makpac Connector Box
- Z : Without Charger, Battery & Carrying Case

ACCESSORIES (Optional)



Extension Handle Set
Part No. 191G67-2

DTW1001

VIDEO CLIP
Models and specs may vary by country

*Not applicable for Z model

BL MOTOR

Fastening Capacities Keupayaan Pengancing 紧固能力	**Standard Bolt: M12 - M30 (1/2" - 1-1/4") High Tensile Bolt: M10 - M24 (3/8" - 1")**
Square Drive Skru Persegi 方形螺杆	**19mm (3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Hard: 0 - 1,800 | Medium: 0 - 1,000 | Soft: 0 - 900**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Hard: 0 - 2,200 | Medium : 0 - 2,000 | Soft: 0 - 1,800**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**1,050N·m (780ft.lbs.)**
Nut-Busting Torque Tork Pembongkaran Maksimum 最大拆卸扭力	**1,700N·m (1,250ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**229x91x289mm (9"x3-5/8"x11-3/8")**
Net Weight Berat Bersih 净重	**3.4 - 3.7kg (7.5 - 8.2lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**185 pcs with BL1850B Bolts M20**

DTW1002RTJ | DTW1002RMJ | DTW1002RFJ | DTW1002Z 12.7mm (1/2")

RM 3,545 | RM 3,398 | RM 3,233 | RM 2,258

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手



C ring



- **Efficient impact system (Max 2,200 IPM) with less vibration**

Standard Equipment: Hook

- RTJ: 1x Rapid Charger, 2x 5.0Ah Battery, 1x Makpac Connector Box
- RMJ: 1x Rapid Charger, 2x 4.0Ah Battery, 1x Makpac Connector Box
- RFJ: 1x Rapid Charger, 2x 3.0Ah Battery, 1x Makpac Connector Box
- Z: Without Charger, Battery & Carrying Case

ACCESSORIES (Optional)



Extension Handle Set
Part No. 191G67-2

*Not applicable for Z model

BL MOTOR

Fastening Capacities Keupayaan Pengancing 紧固能力	**Standard Bolt: M12 - M30 (1/2" - 1-1/4") High Tensile Bolt: M10 - M24 (3/8" - 1")**
Square Drive Skru Persegi 方形螺杆	**12.7mm (1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Hard: 0 - 1,800 | Medium: 0 - 1,000 | Soft: 0 - 900**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Hard: 0 - 2,200 | Medium: 0 - 2,000 | Soft: 0 - 1,800**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**1,000N·m (740ft.lbs.)**
Nut-Busting Torque Tork Pembongkaran Maksimum 最大拆卸扭力	**1,600N·m (1,180ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**229x91x289mm (9"x3-5/8"x11-3/8")**
Net Weight Berat Bersih 净重	**3.3 - 3.6kg (7.3 - 8.0lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**185 pcs with BL1850B Bolts M20**

DTW800RMJ | DTW800RFJ | DTW800Z 11.2mm (7/16")

RM 3,338 | RM 3,173 | RM 2,198

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手





- **Extremely high power 800N·m (590ft.lbs.) way ahead of competitors**

Standard Equipment: Hook

- RMJ: 1x Rapid Charger, 2x 4.0Ah Battery, 1x Makpac Connector Box
- RFJ: 1x Rapid Charger, 2x 3.0Ah Battery, 1x Makpac Connector Box
- Z: Without Charger, Battery & Carrying Case

ACCESSORIES (Optional)



Extension Handle Set
Part No. 191G67-2

*Not applicable for Z model

BL MOTOR

Fastening Capacities Keupayaan Pengancing 紧固能力	**Standard Bolt: M12 - M24 (1/2" - 1") High Tensile Bolt: M10 - M22 (3/8" - 7/8")**
Hex Shank Skru Persegi 方形螺杆	**11.1mm (7/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Hard: 0 - 1,800 | Medium: 0 - 1,000 | Soft: 0 - 900**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Hard: 0 - 2,200 | Medium: 0 - 2,000 | Soft: 0 - 1,800**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**800N·m (590ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**229x91x303mm (9"x3-5/8"x11-7/8")**
Net Weight Berat Bersih 净重	**3.4 - 3.7kg (8.2 - 7.5lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**27 holes with BL1850B Auger Drill ø13/16' (Drill 300mm Douglas-fir)**

DTW701RTJ | DTW701Z 12.7mm (1/2")

RM 3,072 | RM 1,787

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手



Pin detent



- **3 modes of reaction time for automatic stop available both in forward and reverse rotation modes**

Standard Equipment: Hook

- RTJ: 1x Rapid Charger, 2x 5.0Ah Battery, 1x Makpac Connector Box
- Z: Without Charger, Battery & Carrying Case

ACCESSORIES (Optional)



Extension Handle Set
Part No. 191G67-2

*Not applicable for Z model

BL MOTOR XPT

Fastening Capacities Keupayaan Pengancing 紧固能力	**Standard Bolt: M10 - M24 (3/8 - 1") High Strength Bolt (Grade 10.9): M10 - M16 (3/8 - 5/8") High Strength Bolt (Grade F10T): M12, M16 (7/16, 5/8")**
Square Drive Skru Persegi 方形螺杆	**12.7mm (1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Max: 0 - 2,200 | Hard: 1,900 | Medium: 1,200 | Soft: 500**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Max: 0 - 2,700 | Hard: 2,400 | Medium: 1,700 | Soft: 1,000**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**700N·m (520ft.lbs.)**
Nut-Busting Torque Tork Pembongkaran Maksimum 最大拆卸扭力	**1,000N·m (740ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**170x81x276mm (6-11/16x3-3/16x10-7/8")**
Net Weight Berat Bersih 净重	**2.3 - 2.7kg (5.1 - 6.0lbs.)**

DTW700RTJ | DTW700Z 12.7mm (1/2")

RM 3,072 | RM 1,787

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手



C ring



- **3 modes of reaction time for automatic stop available both in forward and reverse rotation modes**

Standard Equipment: Hook

- RTJ: 1x Rapid Charger, 2x 5.0Ah Battery, 1x Makpac Connector Box
- Z: Without Charger, Battery & Carrying Case

ACCESSORIES (Optional)



Extension Handle Set
Part No. 191G67-2

*Not applicable for Z model

BL MOTOR XPT

Fastening Capacities Keupayaan Pengancing 紧固能力	**Standard Bolt: M10 - M24 (3/8 - 1") High Strength Bolt (Grade 10.9): M10 - M16 (3/8 - 5/8") High Strength Bolt (Grade F10T): M12, M16 (7/16, 5/8")**
Square Drive Skru Persegi 方形螺杆	**12.7mm (1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Max: 0 - 2,200 | Hard: 1,900 | Medium: 1,200 | Soft: 500**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Max: 0 - 2,700 | Hard: 2,400 | Medium: 1,700 | Soft: 1,000**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**700N·m (520ft.lbs.)**
Nut-Busting Torque Tork Pembongkaran Maksimum 最大拆卸扭力	**1,000N·m (740ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**170x81x276mm (6-11/16x3-3/16x10-7/8")**
Net Weight Berat Bersih 净重	**2.3 - 2.7kg (5.1 - 6.0lbs.)**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5



Adjustable overall length
Telescopic pipe section is adjustable to user's height in 5 stages by pulling the knob
Overall length: 657mm - 807mm
Range of motion: 150mm
Panjang keseluruhan boleh laras mengikut ketinggian pengguna dalam 5 peringkat
伸缩管段可调整到用户的高度拉动旋钮 5 个阶段



Large two-finger trigger ideal for continuous operation
Suis pemicu yang besar sesuai untuk operasi berterusan
大号两指扳机连续运行的理想选择

Hex wrench can be stored on the main handle
Sepana hex boleh disimpan pada pemegang utama
六角扳手可以存放在主手柄上

Loop handle
Auxiliary loop handle provides added control to make it easy to fit the tool socket on a target bolt
Pemegang gelang menyediakan kawalan tambahan untuk memasang soket alat dengan mudah
环形手柄提供额外的控制，可轻松将工具套筒安装在目标螺栓上

ACCESSORIES (Optional)

Extension Handle Set
Part No. 191G67-2

DTW450RME | DTW450RFE | DTW450Z 12.7mm (1/2")

441 N·m

DTW450RME RM 2,402 | DTW450RFE RM 2,238 | DTW450Z RM 1,263

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手





- **Compact and lightweight design provide superior balance and control**

Standard Equipment: Hook

- RME: 1x Rapid Charger, 2x 4.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Fastening Capacities Keupayaan Pengancing 紧固能力	**Standard Bolt: M12 - M22 (1/2" - 7/8")** **High Tensile Bolt: M12 - M16 (1/2" - 5/8")**
Square Drive Skru Persegi 方形螺杆	**12.7mm (1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**1,600**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**2,200**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**440N·m (325 ft.lbs.)**
Nut-Busting Torque Tork Pembongkaran Maksimum 最大拆卸扭力	**730N·m (545ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**266x82x290mm** **(10-1/2 "x3-1/4"x11-3/8")**
Net Weight Berat Bersih 淨重	**3.1 - 3.4kg (7.6 - 6.9lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**120 pcs with BL1850B** **Bolts M16**

DTW301RTJ | DTW301Z | DTW300RTJ | DTW300Z 12.7mm (1/2")

DTW301RTJ RM 2,790 | DTW301Z RM 1,503 | DTW300RTJ RM 2,790 | DTW300Z RM 1,503

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手





- **3 modes of reaction time for automatic stop available both in forward and reverse rotation modes**

Standard Equipment: Belt Clip, Tool Catcher Set with Shoulder Belt (197941-0)

- RTJ : 1x Rapid Charger, 2x 5.0Ah Battery, 1x Makpac Connector Box
- Z : Without Charger, Battery & Carrying Case

Reverse Rotation Auto Stop Mode
Mod auto berhenti untuk putaran terbalik 反转自动停止模式

*Not applicable for Z model

BL MOTOR XPT

Fastening Capacities Keupayaan Pengancing 紧固能力	**High Strength Bolt: M10 - M16 (3/8 - 5/8")** **Standard Bolt: M10 - M20 (3/8 - 3/4")**
Square Drive Skru Persegi 方形螺杆	**12.7mm (1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Max: 0 - 3,200 | Hard: 2,600 | Medium: 1,800 | Soft: 1,000**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Max: 0 - 4,000 | Hard: 3,400 | Medium: 2,600 | Soft: 1,800**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**330N·m (240ft.lbs.)**
Nut-Busting Torque Tork Pembongkaran Maksimum 最大拆卸扭力	**580N·m (430ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**144x81x246mm** **(5-5/8x3-3/16x9-11/16")**
Net Weight Berat Bersih 淨重	**1.5 - 1.8kg (3.4 - 4.1lbs.)**

DTW302RTJ | DTW302Z 9.5mm (3/8")

DTW302RTJ RM 2,790 | DTW302Z RM 1,503

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手





- **3 modes of reaction time for automatic stop available both in forward and reverse rotation modes**

Standard Equipment:
Belt Clip, Tool Catcher Set with Shoulder Belt (197941-0)

- RTJ: 1x Rapid Charger, 2x 5.0Ah Battery, 1x Makpac Connector Box
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

BL MOTOR XPT

Fastening Capacities Keupayaan Pengancing 紧固能力	**High Strength Bolt: M10 - M16 (3/8 - 5/8")** **Standard Bolt: M10 - M20 (3/8 - 3/4")**
Square Drive Skru Persegi 方形螺杆	**9.5mm (3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Max: 0 - 3,200 | Hard: 0 - 2,600 | Medium: 0 - 1,800 | Soft: 0 - 1,000**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Max: 0 - 4,000 | Hard: 0 - 3,400 | Medium: 0 - 2,600 | Soft: 0 - 1,800**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**300N·m (220ft.lbs.)**
Nut-Busting Torque Tork Pembongkaran Maksimum 最大拆卸扭力	**500N·m (370ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**138x81x246mm** **(5-7/16x3-3/16x9-11/16")**
Net Weight Berat Bersih 淨重	**1.4 - 1.8kg (3.1 - 4.0lbs.)**

DTW285RME | DTW285RFE | DTW285Z 12.7mm (1/2")

DTW285RME RM 2,457 | DTW285RFE RM 2,347 | DTW285Z RM 1,372

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手





- **BL motor delivers 280N·m of max torque**

DTW285RME Semula ada stok masih ada 售完即止 WHILE STOCK LAST

Standard Equipment: Belt Clip

- RME: 1x Rapid Charger, 2x 4.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

BL MOTOR XPT

Fastening Capacities Keupayaan Pengancing 紧固能力	**Standard Bolt: M10 - M20 (3/8" - 3/4")** **High Tensile Bolt: M10 - M16 (3/8" - 5/8")**
Square Drive Skru Persegi 方形螺杆	**12.7mm (1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Hard: 0 - 2,800 | Medium: 0 - 2,100 | Soft: 0 - 1,600**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Hard: 0 - 3,500 | Medium: 0 - 2,600 | Soft: 0 - 1,800**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**280N·m (210ft.lbs.)**
Nut-Busting Torque Tork Pembongkaran Maksimum 最大拆卸扭力	**500N·m (370ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**147x79x249mm** **(5-3/4"x3-1/8"x9-3/4")**
Net Weight Berat Bersih 淨重	**1.5 - 1.8kg (3.2 - 3.9lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**275 pcs with BL1850B** **High Tensile Bolt M16**

***All list price shown are for reference only (exclude SST).**
*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。


18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DTW251RME | DTW251RFE | DTW251Z 12.7mm (1/2")

RM 2,110 | RM 1,947 | RM 972

448

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手



- **High power, compact and lightweight 4-pole motor**



Standard Equipment: Belt Clip

- RME: 1x Rapid Charger, 2x 4.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Fastening Capacities Keupayaan Pengancing 紧固能力	**Standard Bolt: M10 - M16 (3/8" - 5/8")** **High Tensile Bolt: M10 - M14 (3/8" - 9/16")**
Square Drive Skru Persegi 方形螺杆	**12.7mm (1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,100**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,200**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**230N·m (170ft.lbs.)**
Nut-Busting Torque Tork Pembongkaran Maksimum 最大拆卸扭力	**370N·m (270ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**165x79x234mm** **(6-1/2"x3-1/8"x9-1/4")**
Net Weight Berat Bersih 净重	**1.5 - 1.8kg (3.2 - 3.9lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**250 pcs with BL1850B** **Bolt M14**

DTW181RFE | DTW181Z 12.7mm (1/2")

RM 1,757 | RM 780

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手



- **Ideal for working in tight spaces**



Standard Equipment: Belt Clip

- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

BL MOTOR XPT

Fastening Capacities Keupayaan Pengancing 紧固能力	**Standard Bolt: M8 - M16 (5/16" - 5/8")** **High Strength Bolt: M6 - M12 (1/4" - 1/2")**
Square Drive Skru Persegi 方形螺杆	**12.7 mm (1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Hard: 0 - 2,400 | Soft: 0 - 1,300**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Hard: 0 - 3,600 | Soft: 0 - 2,000**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**210N·m (155ft.lbs.)**
Nut-Busting Torque Tork Pembongkaran Maksimum 最大拆卸扭力	**330N·m (245ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**151x79x235mm** **(5-15/16"x3-1/8"x9-1/4")**
Net Weight Berat Bersih 净重	**1.2 - 1.5kg (2.7 - 3.4lbs.)**

DTW190RME | NEW BARU! 新 DTW190RFX2 | DTW190RFE | DTW190Z 12.7mm (1/2")

RM 1,713 | RM 1,550 | RM 1,550 | RM 573

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手



- **190N·m (140ft.lbs.) of Max torque optimal for scaffold bulding**



- RME : 1x Rapid Charger, 2x 4.0Ah Battery
- RFX2 : 1x Rapid Charger, 2x 3.0Ah Battery, Shoulder Belt, Tool Catcher (197940-2)
- RFE : 1x Rapid Charger, 2x 3.0Ah Battery
- Z : Without Charger, Battery & Carrying Case

*Not applicable for Z model

Fastening Capacities Keupayaan Pengancing 紧固能力	**Standard Bolt: M8 - M16 (5/16" - 5/8")** **High Tensile Bolt: M8 - M12 (5/16" - 1/2")**
Square Drive Skru Persegi 方形螺杆	**12.7mm (1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,300**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,000**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**190N·m (140ft.lbs.)**
Nut-Busting Torque Tork Pembongkaran Maksimum 最大拆卸扭力	**320N·m (235ft.lbs.)**
Overall Length Dimensi 体积	**176mm (6-15/16")**
Net Weight Berat Bersih 净重	**1.4 - 1.8kg (3.2 - 3.9lbs)**

DTW180Z 9.5mm (3/8")

RM 780

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手



- **Ideal for working in tight spaces**



Standard Equipment: Belt Clip

- Z: Without Charger & Battery

BL MOTOR XPT

Fastening Capacities Keupayaan Pengancing 紧固能力	**Standard Bolt: M8 - M16 (5/16" - 5/8")** **High Tensile Bolt: M6 - M12 (1/4" - 1/2")**
Square Drive Skru Persegi 方形螺杆	**9.5 mm (3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Hard: 0 - 2,400 | Soft: 0 - 1,300**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Hard: 0 - 3,600 | Soft: 0 - 2,000**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**180N·m (130ft.lbs.)**
Nut-Busting Torque Tork Pembongkaran Maksimum 最大拆卸扭力	**310N·m (228ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**144x79x235mm** **(5-5/8"x3-1/8"x9-1/4")**
Net Weight Berat Bersih 净重	**1.2 - 1.5kg (2.7 - 3.4lbs.)**

Model No. 型号	Square Drive Skru Pemacu Persegi 方形传动螺杆	No Load Speed (rpm) Kelajuan Tanpa Beban 回转数	Impacts Per Minute (IPM) Impak Per Minit 冲击数	Max. Fastening Torque (N.m) Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	Nut-Busting Torque (N.m) Tork Pembongkaran Maksimum 最大拆卸扭力	Overall Length (mm) Panjang Keseluruhan 总长度	Net Weight Berat Bersih 净重	BL MOTOR	XPT
Cordless Impact Wrench									
DTW1001	19mm (3/4")	0-1,800/ 0-1,000/ 0-900	0 - 2,200 / 0 - 2,000 / 0 - 1,800	1,050 (780ft.lbs.)	1,700 (1,250ft.lbs.)	229	3.4kg (7.5lbs)	●	
DTW1002	12.7mm (1/2")	0-1,800/ 0-1,000/ 0-900	0 - 2,200 / 0 - 2,000 / 0 - 1,800	1,000 (740ft.lbs.)	1,600 (1,180ft.lbs.)	229	3.3kg (7.3lbs)	●	
DTW800	11.2mm (7/16") Hex.	0-1,800/ 0-1,000/ 0-900	0 - 2,200 / 0 - 2,000 / 0 - 1,800	800 (590ft.lbs.)	-	229	3.4kg (8.2lbs)	●	
DTW700 / DTW701	12.7mm (1/2")	0-2,200/ 0-1,900/ 0-1,200/ 0-500	0-2,700/ 0-2,400/ 0-1,700/ 0-1,000	700 (520ft.lbs.)	1,000 (740ft.lbs.)	170	2.3kg (5.1lbs)	●	●
DTW450	12.7mm (1/2")	1,600	2,200	440 (325ft.lbs.)	730 (545ft.lbs.)	266	3.1kg (7.6lbs)		
DTW300 / DTW301	12.7mm (1/2")	0-3,200/ 0-2,600/ 0-1,800/ 0-1,000	0-4,000/ 0-3,400/ 0-2,600/ 0-1,800	330 (240ft.lbs.)	580 (430ft.lbs.)	144	1.5kg (3.4lbs)	●	●
DTW302	9.5mm (3/8")	0-3,200/ 0-2,600/ 0-1,800/ 0-1,000	0-4,000/ 0-3,400/ 0-2,600/ 0-1,800	300 (220ft.lbs.)	500 (370ft.lbs.)	138	1.4kg (3.1lbs)	●	●
DTW285	12.7mm (1/2")	0-2,800/ 0-2,100/ 1,600	0 - 3,500 / 0 - 2,600 / 0 - 1,800	280 (210ft.lbs.)	500 (370ft.lbs.)	147	1.5kg (3.2lbs)	●	●
DTW251	12.7mm (1/2")	0-2,100	0 - 3,200	230 (170ft.lbs.)	370 (270ft.lbs.)	165	1.5kg (3.2lbs)		
DTW181	12.7mm (1/2")	0-2,400/ 0-1,300	0 - 3,600/ 0-2,000	210 (155ft.lbs.)	330 (245ft.lbs.)	151	1.2kg (2.7lbs)	●	●
DTW180	9.5mm (3/8")	0-2,400/ 0-1,300	0 - 3,600/ 0-2,000	180 (130ft.lbs.)	320 (235ft.lbs.)	144	1.2kg (2.7lbs)	●	●
DTW190	12.7mm (1/2")	0-2,300	0 - 3,000	190 (140ft.lbs.)	310 (228ft.lbs.)	176	1.4kg (3.2lbs)		

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

Cordless Ratchet Wrench

Perengkuh Ratchet Tanpa Kord
充电式棘轮扳手

Net Weight
Berat Bersih 淨重
1.2kg

Max Fastening Torque
Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力
47.5N·m

Supplied with two socket adapters

Dibekalkan dengan dua penyesuai soket
随附两个套筒转接头





Socket adaptor
Penyesuai soket 套筒转接头
9.5mm (3/8")
Part No.191A50-3



Socket adaptor
Penyesuai soket 套筒转接头
6.35mm (1/4")
Part No.191A51-1

BL MOTOR
Motor tanpa berus
无碳刷马达




Can also be used as a hand ratchet wrench
Boleh juga digunakan sebagai perengkuh tangan
也可作为手动工具使用

Forward / Reverse rotation change

Turn the reversing lever to the A side for clockwise rotation or to the B side for counterclockwise rotation

Kawalan tuas
Putar tuas ke sisi A untuk putaran mengikut arah jam, atau ke sisi B untuk putaran berlawanan arah jarum jam
反转杆动作
将反转杆转至 A 侧以进行顺时针旋转，或转至 B 侧，以进行逆时针旋转

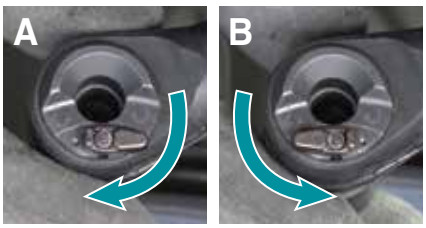

Able to tighten 13mm nut onto M8 threaded rod

Mampu mengetatkan nat 13mm ke batang berulir M8
转接孔可紧固 M8 螺栓/ 螺帽（作为 13mm 套筒使用）



13mm nut only

LED job light

with preglow and afterglow functions

Lampu kerja LED dengan fungsi preglow dan afterglow
具有预发光和余辉功能的LED工作灯



XPT EXTREME PROTECTION TECHNOLOGY
Teknologi Perlindungan Ekstrim
防尘防水滴技术




Tool Bag (Optional Accessories)
Beg Alat Makita 工具袋
Part No. 831271-6

DWR180Z 9.5mm (3/8")

RM 1,222

Cordless Ratchet Wrench
Perengkuh Ratchet Tanpa Kord
充电式棘轮扳手



- **Supplied with two socket adapters for compatibility with a variety of sockets**



Standard Equipment: Socket Adapter

- Z: Without Charger & Battery

Fastening Capacities Keupayaan Pengancing 紧固能力	**Standard Bolt: M5 - M12 (3/16 - 1/2")** **High Strength Bolt: M5 - M10 (3/16 - 3/8")**
Square Drive Kepala Segi Empat 方形头	**9.5mm (3/8") | 6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 800**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**47.5N·m (420in.lbs.)**
Flats Width Lebar Flat 单位宽度	**13mm (1/2")**
Angle Head Size Saiz Kepala Sudut 角头尺寸	**Diameter: 31mm (1-7/32")** **Height: 25.5mm (1")**
Dimensions (L x W x H) Dimensi 体积	**369x79x87mm** **(14-1/2x3-1/8x3-7/16")**
Net Weight Berat Bersih 淨重	**1.2 - 1.6kg (2.6 - 3.5lbs.)**

DTL063Z 9.5mm (3/8")

RM 1,218

Cordless Angle Impact Wrench
Perengkuh Impak Sudut Tanpa Kord
充电式角向冲击套筒扳手



- **Compact angle head for easy access to bolts in tight places**



Standard Equipment: Belt Clip

- Z: Without Charger & Battery

Fastening Capacities Keupayaan Pengancing 紧固能力	**Standard Bolt: M4 - M12 (5/32" - 1/2")** **High Tensile Bolt: M4 - M8 (5/32" - 5/16")**
Square Drive Skru Persegi 方形螺杆	**9.5mm (3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,000**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,000**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**60N·m (N/A ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**387x78x116mm** **(15-1/4"x3-1/16"x4-9/16")**
Net Weight Berat Bersih 淨重	**1.4 - 2.0kg (3.1 - 4.3lbs)**

***All list price shown are for reference only (exclude SST).**
*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DHR242RTE | DHR242RME | DHR242RFE | DHR242Z 24mm (15/16")

RM 2,777 | RM 2,632 | RM 2,467 | RM 1,492

Cordless Combination Hammer
Tukul Kombinasi Tanpa Kord
充电式冲击电钻电锤



3 modes



- 3-Mode operation; rotation only, hammering with rotation and hammering only

Standard Equipment: Depth Gauge, Side Grip

- RTE: 1x Rapid Charger, 2x 5.0Ah Battery
- RME: 1x Rapid Charger, 2x 4.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

BL MOTOR XPT

Impact Energy Kekuatan Impak 单次最大锤击力	2J
Capacity Kapasiti 能力	Concrete: 24mm (15/16") | Steel: 13mm (1/2") | Wood: 27mm (1-1/16")
Impacts Per Minute (IPM) Impak Per Minit 冲击数	0 - 4,700
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	0 - 950
Dimensions (L x W x H) Dimensi 体积	328x85x213mm (12-7/8"x3-3/8"x8-3/8")
Net Weight Berat Bersih 淨重	3.1 - 3.8kg (6.7 - 8.4lbs)
Work Amount (approx.) Jumlah Kerja 工作量	60 holes with BL1850B Mansory Drill ø10.5mm Concrete Depth 60mm

ACCESSORIES (Optional)

DX01 Dust Extraction System Set Part No. 195896-3



DX06 Dust Extraction System Set Part No. 199561-6




DHR241RFE | DHR241Z 20mm (13/16")

RM 2,072 | RM 1,095

441

Cordless Combination Hammer
Tukul Kombinasi Tanpa Kord
充电式冲击电钻电锤



3 modes



- 3-Mode operation; rotation only, hammering with rotation and hammering only

Standard Equipment: Depth Gauge, Side Grip

- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Impact Energy Kekuatan Impak 单次最大锤击力	1.9J
Capacity Kapasiti 能力	Concrete: 20mm (13/16") | Steel: 13mm (1/2") | Wood: 26mm (1")
Impacts Per Minute (IPM) Impak Per Minit 冲击数	0 - 4,000
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	0 - 1,100
Dimensions (L x W x H) Dimensi 体积	417x84x219mm (16-3/8"x3-5/16"x8-5/8")
Net Weight Berat Bersih 淨重	3.2 - 4.0kg (7.1 - 8.8lbs)
Work Amount (approx.) Jumlah Kerja 工作量	133 holes with BL1850B Mansory drill ø16.5mm Concrete Depth 40mm

DHR202RME | DHR202RFE | DHR202Z 20mm (13/16")

RM 2,235 | RM 2,072 | RM 1,095

441

Cordless Combination Hammer
Tukul Kombinasi Tanpa Kord
充电式冲击电钻电锤



3 modes



- 3-Mode operation; rotation only, hammering with rotation and hammering only

Standard Equipment: Depth Gauge, Side Grip

- RME: 1x Rapid Charger, 2x 4.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Capacity Kapasiti 能力	Concrete: 20mm (13/16") | Steel: 13mm (1/2") | Wood: 26mm (1")
Impacts Per Minute (IPM) Impak Per Minit 冲击数	0 - 4,000
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	0 - 1,100
Dimensions (L x W x H) Dimensi 体积	358x84x259mm (14-1/8"x3-5/16"x10-1/4")
Net Weight Berat Bersih 淨重	3.2 - 4.0kg (7.1 - 8.8lbs)
Work Amount (approx.) Jumlah Kerja 工作量	130 holes with BL1850B Mansory drill ø6.5mm Concrete Depth 60mm

DHR182ZWJ 18mm (11/16")

RM 1,957

Cordless Combination Hammer
Tukul Kombinasi Tanpa Kord
充电式冲击电钻电锤



3 modes



- Auto-start Wireless System (AWS) connects to vacuum cleaner with Bluetooth

Standard Equipment: Side Grip, Depth Gauge

- ZWJ: Without Charger, Battery, Come with 1x Dust Extraction System Set, 1x Makpac Connector Box

Come with



DX05 Dust Extraction System Set Part No. 199658-1

BL MOTOR XPT AVT AWS

Impact Energy Kekuatan Impak 单次最大锤击力	EPTA-Procedure 05/2009: 1.7J Our experimental conditions: 1.6J
Capacity Kapasiti 能力	Concrete: 18mm (11/16") | Core Bit: 35mm (1-3/8") | Diamond Core Bit (Dry Type): 32mm (1-1/4") | Steel: 13mm (1/2") | Wood: 24mm (15/16")
Impacts Per Minute (IPM) Impak Per Minit 冲击数	0 - 5,000
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	0 - 1,350
Max Output Keluaran Maksima 最大输出	450W
Dimensions (L x W x H) Dimensi 体积	301x82x285mm (11-7/8"x3-1/4"x11-1/4")
Net Weight Berat Bersih 淨重	2.4 - 3.2kg (5.3 - 7.0lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	140 holes with BL1850B Mansory Drill Ø6.5mm Concrete 40N/ mm2 Depth 60mm

DHR171RTE | DHR171RFE | DHR171Z 17mm (11/16")

RM 2,343 | RM 2,035 | RM 1,060

Cordless Rotary Hammer
Tukul Putar Tanpa Kord
充电式电锤



2 modes



- 2-Mode operation; rotation only, or hammering with rotation only

Standard Equipment: Side Grip, Depth Gauge

- RTE: 1x Rapid Charger, 2x 5.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

BL MOTOR

Impact Energy Kekuatan Impak 单次最大锤击力	EPTA-Procedure 05/2009: 1.2J Our experimental conditions: 1.1J
Capacity Kapasiti 能力	Concrete: 17mm (11/16") | Steel: 10mm (3/8") | Wood: 13mm (1/2")
Impacts Per Minute (IPM) Impak Per Minit 冲击数	0 - 4,800
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	0 - 680
Dimensions (L x W x H) Dimensi 体积	273x86x211mm (10-3/4"x3-3/8"x8-5/16")
Net Weight Berat Bersih 淨重	2.1 - 2.8kg (4.6 - 6.2lbs)
Work Amount (approx.) Jumlah Kerja 工作量	220 holes with BL1850B Mansory Drill Ø6mm Concrete 40N/ mm2 Depth 40mm

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。


18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DHR165RME | DHR165RFE | DHR165Z 16mm (5/8")

RM 2,130 | RM 1,965 | RM 990

430

Cordless Rotary Hammer
Tukul Putar Tanpa Kord
充电式电锤



2 modes



- 2-Mode operation; rotation only, or hammering with rotation only

Standard Equipment: Depth Gauge, Side Grip

- RME: 1x Rapid Charger, 2x 4.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model


XPT

Impact Energy Kekuatan Impak 单次最大锤击力	1.3J
Capacity Kapasiti 能力	Concrete: 16mm (5/8") | Steel: 13mm (1/2") | Wood: 24mm (15/16")
Impacts Per Minute (IPM) Impak Per Minit 冲击数	0 - 5,300
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	0-1,600
Dimensions (L x W x H) Dimensi 体积	297x79x253mm (11-3/4"x3-1/8"x10")
Net Weight Berat Bersih 净重	2.3 - 3.0kg (5.0 - 6.6lbs)
Work Amount (approx.) Jumlah Kerja 工作量	225 holes with BL1850B Mansory drill ø6.5mm Concrete Depth 30mm

DHK180Z

RM 3,468

Cordless Power Scraper
Pengikis Kuasa Tanpa Kord
充电式铲平机





- High power & low vibration

Standard Equipment: Hook

- Z: Without Charger & Battery

BL MOTOR XPT AVT


Impact Energy Kekuatan Impak 单次最大锤击力	EPTA-Procedure 05/2009: 3.1J Our experimental conditions: 3.9J
Impact Per Minute (IPM) Impak Per Minit 冲击数	0 - 3,200
Dimensions (L x W x H) Dimensi 体积	368x99x211mm (14-1/2"x3-7/8"x8-5/16")
Net Weight Berat Bersih 净重	3.3 - 3.6 kg (7.3 - 7.9 lbs.)
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	17min with BL1850B

DUT130RFE | DUT130Z | DUT131Z

RM 2,840 | RM 1,865 | RM 2,548

Cordless Mixer
Pengadun Tanpa Kord
充电式搅拌机



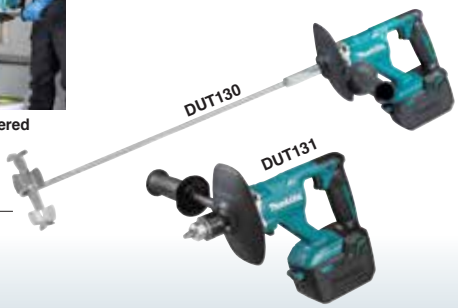

- Battery cover prevents concrete to be scattered on the battery

Standard Equipment:
DUT130: Mixing Blade, Shaft, Shaft Holder, Side Grip, Front Cover, Wrenches, Tool Bag

DUT131: Front Cover, Side Grip, Chuck Key, Tool Bag

- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger & Battery

BL MOTOR XPT

Chuck Capacity Kapasiti Chuck 夹头能力	1.5 - 13mm (1/16 - 1/2") DUT131
Blade Diameter Diameter Bilah 锯片直径	165mm (6-1/2") DUT130
Shank size of tool holder portion Batang Saiz 柄部尺寸	M12 or M14 DUT130
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	High: 0 - 1,300 | Low: 0 - 350
Dimensions (L x W x H) Dimensi 体积	916x89x231mm DUT130 (36"x3-1/2"x9-1/8") 307x89x231mm DUT131 (12-1/8"x3-1/2"x9-1/8")
Net Weight Berat Bersih 净重	2.5 - 2.8 kg (5.6 - 6.3 lbs.) DUT130 2.7 - 3.0kg (5.8 - 6.6lbs.) DUT131
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	25min with BL1850B One Liquid Paint 4L - High Speed

DCS553Z 150mm (5-7/8")

RM 2,087

Cordless Metal Cutter
Pemotong Logam Tanpa Kord
充电式金属切割机





- Built-in dust collection box for cleaner work environment

Standard Equipment: TCT Saw Blade, Hex Wrench, Safety Goggles, Guide Rule

- Z: Without Charger & Battery

BL MOTOR XPT ADT BRAKE

Max Output Keluaran Maksima 最大输出	600W
Blade Diameter Diameter Bilah 锯片直径	150mm (5-7/8")
Hole Diameter Diameter Lubang 孔直径	20mm (13/16")
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	90°: 57.5mm (2-1/4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	4,200
Dimensions (L x W x H) Dimensi 体积	267x186x250mm (10-1/2"x7-3/8"x9-7/8")
Net Weight Berat Bersih 净重	2.8 - 3.1kg (6.1 - 6.8lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	125 cuts with BL1850B Saw Blade - Carbon Steel Pipe Ø 34mm, Thickness 3.2mm

DCS552Z 136mm (5-3/8")

RM 1,290

430

Cordless Metal Cutter
Pemotong Logam Tanpa Kord
充电式金属切割机





- Built-in dust collection box for cleaner work environment

Standard Equipment: TCT Saw Blade (B-07319), Hex Wrench, Safety Goggles

- Z: Without Charger & Battery

Max Output Keluaran Maksima 最大输出	370W
Blade Diameter Diameter Bilah 锯片直径	136mm (5-3/8")
Hole Diameter Diameter Lubang 孔直径	20mm (13/16")
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	90°: 50.5mm (2")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	3,600
Dimensions (L x W x H) Dimensi 体积	348x196x203mm (13-3/4"x7-3/4"x8")
Net Weight Berat Bersih 净重	2.4 - 2.7kg (5.3 - 6.0lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	125 cuts with BL1850B Saw Blade - Carbon Steel Pipe Ø 34mm, Thickness 3.2mm

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DCS551RFJ | DCS551Z 150mm (5-7/8")

RM 2,835 | RM 1,860

Cordless Metal Cutter

Pemotong Logam Tanpa Kord
充电式金属切割机



- **Cuts 51mm (2") conduit in a single pass**



Standard Equipment: TCT Saw Blade (B-46296), Hex Wrench, Safety Goggles

- RFJ: 1x Rapid Charger, 2x 3.0Ah Battery, 1x Makpac Connector Box
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

BL MOTOR XPT

Blade Diameter Diameter Bilah 锯片直径	**150mm (5-7/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 57.5mm (2-1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,900**
Dimensions (L x W x H) Dimensi 体积	**332x158x231mm (13-1/8"x6-1/4"x9-1/8")**
Net weight Berat Bersih 淨重	**2.5 - 2.8kg (5.5 - 6.2lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**210 pcs with BL1850B** **Saw Blade - Wire Tube Ø 38.1mm, Wall Thickness 1.4mm**

DCS550RFE | DCS550Z 136mm (5-3/8")

RM 2,140 | RM 1,165

430

Cordless Metal Cutter

Pemotong Logam Tanpa Kord
充电式金属切割机



- **Carbide-tipped 30T blade for cutting a wide range of materials**



Standard Equipment: TCT Saw Blade (B-07319), Hex Wrench, Safety Goggles

- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Blade Diameter Diameter Bilah 锯片直径	**136mm (5-3/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 51mm (2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,600**
Dimensions (L x W x H) Dimensi 体积	**348x180x201mm (13-3/4"x7-1/8"x7-7/8")**
Net weight Berat Bersih 淨重	**2.2 - 2.6kg (4.9 - 5.7lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**216 pcs with BL1850B** **Saw Blade - Wire Tube Ø 38.1mm, Wall Thickness 1.4mm**

DJS130RFE | DJS130Z 1.3mm

RM 2,912 | RM 1,935

440

Cordless Metal Shear

Pemotong Logam Tanpa Kord
充电式电剪



- **360° swivel shear head for increased cutting convenience**



Standard Equipment: Hex Wrench

- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Capacity Kapasiti 能力	**Steel up to 400 N/mm²: 1.3mm** **Steel up to 600 N/mm²: 1.0mm**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,800**
Dimensions (L x W x H) Dimensi 体积	**350x80x193mm (13-3/4"x3-1/8"x7-5/8")**
Net weight Berat Bersih 淨重	**2.3 - 2.6kg (5.0 - 5.8lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**200 pcs with BL1850B** **Cutting (SPCC Sheet 1.0 x 600mm)**

DJS161Z 1.6mm

RM 1,935

430

Cordless Straight Shear

Pemotong Logam Lurus
Tanpa Kord
充电式电剪压穿式



- **High cutting capacity: cuts up to 1.6mm thick mild steel sheet**



Standard Equipment: Hex Wrench, Thickness Gauge

- Z: Without Charger & Battery

Capacity Kapasiti 能力	**Steel up to 400 N/mm²: 1.6mm** **Steel up to 600 N/mm²: 1.2mm** **Aluminum up to 200 N/mm²: 2.5mm**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**4,300**
Dimensions (L x W x H) Dimensi 体积	**362x78x118mm (14-1/4"x3-1/16"x4-5/8")**
Net weight Berat Bersih 淨重	**1.8 - 2.2kg (4.1 - 4.8lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**95 pcs with BL1850B** **Cutting (Thin Metal Plate 1.2mm)**

DJS101Z 1.0mm

RM 2,240

430

Cordless Metal Shear

Pemotong Logam Tanpa Kord
充电式电剪



- **Easy curve cutting with a smooth edge**



Standard Equipment: Hex Wrench

- Z: Without Charger & Battery

Capacity Kapasiti 能力	**Steel up to 400 N/mm²: 1.0mm** **Steel up to 600 N/mm²: 0.7mm** **Aluminum up to 200 N/mm²: 2.5mm**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**4,300**
Dimensions (L x W x H) Dimensi 体积	**364x78x118mm (14-3/8"x3-1/16"x4-5/8")**
Net weight Berat Bersih 淨重	**1.8 - 2.2kg (4.0 - 4.7lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**150 pcs with BL1850B** **Cutting (Steel sheet SUS430 600x1.0mm)**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DJN161Z 1.6mm (16Ga)
RM 2,447

430 mm

Cordless Nibbler
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式电冲剪





- **Ideal for cutting roofing sheet metal at thicknesses up to 16 gauge**

Capacity Kapasiti 能力	**Steel up to 400 N/mm²: 1.6mm** **Steel up to 600 N/mm²: 1.2mm** **Aluminum up to 200 N/mm²: 2.5mm**
Min. Cutting Radius Radius Pemotongan Minimum 最小切割半径	**Inside edge: 45mm (1-3/4")** **Outside edge: 50mm (2")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**1,900**
Dimensions (L x W x H) Dimensi 体积	**313x78x189mm** **(12-3/8"x3-1/16"x7-7/16")**
Net weight Berat Bersih 淨重	**1.9 - 2.3kg (4.3 - 5.0lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**30m with BL1850B** **Cutting (Steel Plate 1mm)**

Standard Equipment: Hex Wrench, Wrench, Punch, Die

- Z: Without Charger & Battery

DRV250Z | DRV150Z
RM 8,315 | RM 8,315

Cordless Rivet Gun
Penembak Rivet Tanpa Kord
充电式拉钉枪





- **Compact center height for increased maneuverability against a wall**

Max Pulling Force Kekuatan Tarikan Maksimum 拉钉力量	**20kN DRV250** **10kN DRV150**
Length of Stroke Panjang Strok 冲程长度	**30mm (1-3/16") DRV250** **25mm (1") DRV150**
Dimensions (L x W x H) Dimensi 体积	**320x79x287mm DRV250** **(12-5/8"x3-1/8"x11-1/4")** **310x80x287mm DRV150** **(12-1/4"x3-1/8"x11-1/4")**
Net Weight Berat Bersih 淨重	**2.1 - 2.4kg (4.6 - 5.2lbs.) DRV250** **1.9 - 2.2kg (4.3 - 5.0lbs.) DRV150**
Work Amount (approx.) Jumlah Kerja 工作量	**2,000 rivets with BL1850B DRV250** **2,300 rivets with BL1850B DRV150**
	Mandrel diameter: Ø4.8mm

Standard Equipment: Grease (191D57-7), Accessory Set, Belt Clip

- Z: Without Charger & Battery

BL MOTOR XPT

Cordless Rebar Tying Tool
Alat Pengikat Rebar Tanpa Kord 充电式钢筋捆绑机

Easy to load with tie wire reel



1 **Push the release lever**
Tekan tuas pelepas 按下釋放桿

2 **Put a reel and pass a wire through the hole**
Letakkan keluli wayar melalui lubang
將捆綁絲穿過推軸

3 **Release the lock lever**
Lepaskan tuas kunci 釋放鎖定桿



*Jumlah Kerja 工作量
Work Amount with BL1850B
(D10 x D10 Rebar)
5,300 times
(approx.)

Tying Speed
Kelajuan mengikat 捆绑速度
0.95
second with
(D10 x D10 Rebar)

1 Reel about **120** times
(D10 x D10 Rebar)

Accessories
Aksesori 配件



Tie Wire Set (Ø0.8mm) 50pcs/ box
Part No. 199137-9





Applicable Rebars: D10 x D10 - (D13 x 2) x (D13 x 2)

	Tying Capacity (2 pcs of rebars)		
	D10 (#3)	D13 (#4)	D16 (#5)
D10 (#3)	✓	✓	✓
D13 (#4)	✓	✓	✓
D16 (#5)	✓	✓	✓

	Tying Capacity (3 pcs of rebars)	
	D10 (#3) x D10 (#3)	D13 (#4) x D13 (#4)
D10 (#3)	✓	✓
D13 (#4)	✓	✓
D16 (#5)	✓	—

	Tying Capacity (4 pcs of rebars)	
	D10 (#3) x D10 (#3)	D13 (#4) x D13 (#4)
D10 (#3) x D10 (#3)	✓	✓
D13 (#4) x D13 (#4)	✓	✓

(# means perimeter length: cm)

DTR180ZJ
RM 5,868

Cordless Rebar Tying Tool
Alat Pengikat Rebar Tanpa Kord
充电式钢筋捆绑机





- **Continuous actuation mode for efficient continuous rebar tying**



Tie Wire Wayar Pengikat 綁線	**ø0.8mm**
Applicable Rebars Keluli yang Sesuai 適用鋼筋	**D10 x D10 - (D13 x 2) x (D13 x 2)**
Dimensions (L x W x H) Dimensi 体积	**304x93x318mm** **(12"x3-2/3"x12-1/2")**
Net Weight Berat Bersih 淨重	**2.3 - 2.6kg (5.1 - 5.7lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**5300 times with BL1850B** **Tying (D10 x D10 Rebar)**

Standard Equipment: Hex Wrench, Hook

- ZJ: With 1x Makpac Connector Box, Without Charger & Battery

BL MOTOR XPT

DTR180

VIDEO CLIP
Models and specs may vary by country

***All list price shown are for reference only (exclude SST).**
*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DPP200ZK
RM 17,500

440

Cordless Hole Puncher
Penebuk Lubang Tanpa Kord
充电式油压冲孔机



*Not compatible with 2.0Ah, 1.5Ah batteries



- **Punches up to 20 mm Holes through Steel Plate up to 8 mm thick**

Standard Equipment: Punch, Dice, Hex Wrench, Spanner, Bar for fastening nuts, Grip, Oil

- ZK: With Carrying Case, Without Charger & Battery

Capacity Keupayaan 能力	**Steel: 20mm (13/16") Stainless Steel: 20mm (13/16")**
Max Throat Depth Kedalaman Maksimum 最大深度	**40mm (1-9/16")**
Dimensions (L x W x H) Dimensi 体积	**417x127x315mm (16-3/8"x5"x12-3/8")**
Net Weight Berat Bersih 淨重	**10.5kg (23.2lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**110 holes with BL1830B on General steel for Ø20 mm with 6mm Thickness**

Cordless Threaded Rod Cutter
Pemotong Batang Keluli Tanpa Kord 充电式螺纹杆切割机



LED job light
Lampu kerja LED
LED工作灯

*Jumlah Kerja 工作量
Work Amount with BL1850B
(Mild steel M10)
1,330 rods
(approx.)



Performs stable cutting even on the floor
Pemotongan yang stabil walaupun di lantai
即使在地板上也能进行稳定的切割

Blade Cover
Can be used as a rod support
Penutup pisau Boleh digunakan sebagai penyangga rod
刀片盖可用作杆支撑

Rod Guide There are two rod guide positions
Terdapat dua kedudukan panduan tuas 有两个杆导向位置



◀[1]
Size of threaded rod
W3/8, M10



◀[2]
Size of threaded rod
M8, M6

Cutting Capacity
Kapasiti 能力
M6 - M10
(W3/8")

Accessories
Aksesori 配件

Cutter Blade Set
Replacing the cutting dice



Type		Cutting Capacities	Part No.
inch screw	Mild steel •Stainless steel	W3/8	199080-2
mm screw	Mild steel •Stainless steel	M6	199086-0
	Mild steel •Stainless steel	M8	199084-4
	Mild steel	M10	199082-8

DSC102ZJ
RM 5,638

Cordless Threaded Rod Cutter
Pemotong Batang Keluli Tanpa Kord
充电式螺纹杆切割机





- **More Compact & High Productivity**

Standard Equipment: Cutter Blade Set W3/8 (199080-2), Hex Socket Head Bolt, Blade Cover, Depth Gauge, Thumb Screw, Hex Wrench

- ZJ: With 1x Makpac Connector Box, Without Charger & Battery

*Not applicable for Z model

BL MOTOR

Capacity Kapasiti 能力	**Mild Steel: W3/8, M10, M8, M6 Stainless Steel: W3/8, M8, M6**
Min. Cutting Length Panjang Pemotongan Minimum 最小切割长度	**20mm (13/16")**
Dimensions (L x W x H) Dimensi 体积	**199x103x308mm (7-7/8"x4-1/16"x12-1/8")**
Net Weight Berat Bersih 淨重	**2.8 - 3.2kg (6.2 - 7.0lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**1330 rods with BL1850B (Mild steel M10)**

DSC121ZK
RM 19,053

Cordless Threaded Rod Cutter
Pemotong Batang Berulir Tanpa Kord
充电式螺纹杆切割机





- **Power Cutting at High Speed**

Standard Equipment: W3/8 Cutter Blade, Stand, Oil, Hex Wrench

- ZK: With 1x Makpac Connector Box, Without Charger & Battery

BL MOTOR

Capacity Kapasiti 能力	**Steel: 8 - 12mm (5/16" - 1/2")**
Cutting Speed (sec) Kelajuan Bilah 刀片速度	**3.0**
Dimensions (L x W x H) Dimensi 体积	**212x323x260mm (8-3/8"x12-3/4"x10-1/4")**
Net Weight Berat Bersih 淨重	**6.0kg (13.2lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**420 rods with BL1850B (Mild steel M12)**

***All list price shown are for reference only (exclude SST).**
*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DSC162Z | DSC163ZK

RM 20,457 | RM 21,190

Cordless Steel Rod Cutter

Pemotong Keluli Tanpa Kord
充电式钢筋切割机

DSC162 440





DSC163 BL MOTOR

- Spark free cutting of rebar and steel rod ideal for use in sensitive areas

Standard Equipment: Wrench, Hex Wrench, Oil supply

- Z: Without Charger & Battery
- ZK: With Carrying Case, Without Charger & Battery

Cutting Capacity Kapasiti Pemotongan 切割能力	**Dia.: 3 - 16mm (1/8" - 5/8")**
Cutting Speed (sec) Kelajuan Memotong 切割速度	**4.0** DSC162 **2.8** DSC163
Dimensions (L x W x H) Dimensi 体积	**380x108x265mm** DSC162 **(15"x4-1/4"x10-3/8")** **360x108x276mm** DSC163 **(14-1/8"x4-1/4"x10-7/8")**
Net Weight Berat Bersih 淨重	**7.1kg (15.7lbs)** DSC162 **6.9kg (15.2lbs.)** DSC163
Work Amount (approx.) Jumlah Kerja 工作量	**191 pcs with BL1850B** DSC162 **Cutting (Rebar ø16)** **233 pcs with BL1850B** DSC163 **Cutting (Rebar ø16)**

DSC191Z

RM 22,118

440

Cordless Steel Rod Cutter

Pemotong Keluli Tanpa Kord
充电式钢筋切割机





- Ideal for cutting steel bars laid in concrete slab

Standard Equipment: Wrench, Hex Wrench, Oil supply

- Z: Without Charger & Battery

Cutting Capacity Kapasiti Pemotongan 切割能力	**Dia.: 3 - 20mm (1/8" - 3/4")**
Cutting Speed (sec) Kelajuan Memotong 切割速度	**6.5**
Dimensions (L x W x H) Dimensi 体积	**412x212x284mm** **(16-1/5"x8-3/8"x11-1/8")**
Net Weight Berat Bersih 淨重	**11.1 - 11.2kg (24.5 - 24.6lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**333 pcs with BL1850B** **Cutting (Rebar ø10)**

DSC251ZK

RM 9,213

Cordless Steel Rod Cutter

Pemotong Keluli Tanpa Kord
充电式钢筋切割机





- Ideal for edge cutting of threaded rods and rebars

Standard Equipment: Tipped Saw, Dust Bag, Side Grip, Hex Wrench

- ZK: With Carrying Case, Without Charger & Battery

BL MOTOR ADT

Blade Diameter Diameter Bilah 锯片直径	**110mm (4-5/16")**
Cutting Capacity Kapasiti Pemotongan 切割能力	**Dia.: 10 - 25mm (3/8" - 1")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,200**
Dimensions (L x W x H) Dimensi 体积	**471x137x139mm** **(18-1/2"x5-3/8"x5-1/2")**
Net Weight Berat Bersih 淨重	**3.9 - 4.0kg (8.7 - 8.8lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**60 pcs with BL1850B** **Cutting Rebar SD345 490N/mm2 D25**

DPB180Z

RM 2,772

430

Cordless Portable Band Saw

Gergaji Pita Tanpa Kord
充电式带锯机





- 6-Setting variable speed control dial enables user to match the speed to the application

Standard Equipment: Band Saw Blade, Hex Wrench

- Z: Without Charger & Battery

Capacity Kapasiti 能力	**Round: 120mm (4-3/4")** **Rectangular workpiece w/o stand:** **120x120mm (4-3/4"x4-3/4")**
Blade Speed Kelajuan Bilah 刀片速度	**1.4-2.7m/s (275-530ft/min.)**
Dimensions (L x W x H) Dimensi 体积	**523x231x313mm** **(20-5/8"x9-1/8"x12-3/8")**
Net Weight Berat Bersih 淨重	**6.8 - 7.1kg (14.9 - 15.7lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**200 pcs with BL1850B** **Cutting (Steel Wire Tube Ø38.1mm)** **(1.4mm Thickness)**

DPB182Z

RM 1,692

Cordless Portable Band Saw

Gergaji Pita Tanpa Kord
充电式带锯机





- Aluminum housing improves rigidity and prevents blade coming off

Standard Equipment: Band Saw Blade, Hex Wrench

- Z: Without Charger & Battery

DPB182 VIDEO CLIP Models and specs may vary by country

Capacity Kapasiti 能力	**Round: 64mm (2-1/2")** **Rectangular: 64x64mm (2-1/2"x2-1/2")**
Blade Speed Kelajuan Bilah 刀片速度	**3.2m/s (630ft/min.)**
Blade Size Saiz Bilah 锯片尺寸	**Length: 835mm (32-7/8")** **Width: 13mm (1/2")** **Thickness: 0.5mm (0.02")**
Dimensions (L x W x H) Dimensi 体积	**477x197x229mm** **(18-3/4"x7-3/4"x9")**
Net Weight Berat Bersih 淨重	**3.8 - 4.1kg (8.3 - 9.0lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**210 pcs with BL1850B** **Cutting (Steel Wire Tube Ø38.1mm)** **(1.4mm Thickness)**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

Cordless Portable Band Saw

Gergaji Pita Tanpa Kord 充电式带锯机



DPB183Z

RM 2,232

Cordless Portable Band Saw
Gergaji Pita Tanpa Kord
充电式带锯机



- **Constant speed control minimizes the reduction in blade speed to provide stable cutting**



Standard Equipment:
Band Saw Blade, Hex Wrench
- Z: Without Charger & Battery

VIDEO CLIP
Models and specs may vary by country
DPB183

Capacity Keupayaan 能力	**Round: 66mm (2-5/8")** **Square: 66 x 66mm (2-5/8 x 2-5/8")**
Blade Speed Kelajuan Bilah 锯片速度	**0 - 3.2 m/s (0 - 630ft/min.)**
Blade Size Saiz Bilah 锯片尺寸	**Length: 835mm (32-7/8")** **Width: 13mm (1/2")** **Thickness: 0.5mm (0.02")**
Dimensions (L x W x H) Dimensi 体积	**392x174x242mm (15-1/2x6-7/8x9-1/2")**
Net Weight Berat Bersih 淨重	**3.6 - 3.9kg (7.9 - 8.6lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**250 pcs with BL1850B** **Cutting (Steel Wire Tube Ø38.1mm)** **(1.4mm Thickness)**

DPB184Z

RM 2,045

Cordless Portable Band Saw
Gergaji Pita Tanpa Kord
充电式带锯机



- **Constant speed control minimizes the reduction in blade speed to provide stable cutting**



Standard Equipment:
Band Saw Blade, Hex Wrench
- Z: Without Charger & Battery


VIDEO CLIP
Models and specs may vary by country
DPB184

Capacity Keupayaan 能力	**Round: 51mm (2")** **Square: 51 x 51mm (2 x 2")**
Blade Speed Kelajuan Bilah 锯片速度	**0 - 3.2 m/s (0 - 630ft/min.)**
Blade Size Saiz Bilah 锯片尺寸	**Length: 730mm (28-3/4")** **Width: 13mm (1/2")** **Thickness: 0.5mm (0.02")**
Dimensions (L x W x H) Dimensi 体积	**373x162x223mm (14-3/4x6-3/8x8-3/4")**
Net Weight Berat Bersih 淨重	**3.3 - 3.6kg (7.3 - 7.9lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**400 pcs with BL1850B** **Cutting (Steel Wire Tube Ø25.4mm)** **(1.2mm Thickness)**

DCC500Z

RM 1,348

Cordless Dustless Cutter
Pemotong Tanpa Kord
充电式切割机



- **Auto-start Wireless System (AWS) connects to compatible vacuum cleaners with Bluetooth**



Standard Equipment:
Dust Bag, Hex Wrench
- Z: Without Charger & Battery

ACCESSORIES
(Optional)
Water Supply Cover Set A
Part No. 191M48-2



Blade Diameter Diameter Bilah 锯片直径	**125mm (5")**
Hole Diameter Diameter Lubang 孔直径	**20mm (13/16")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 40mm (1-9/16")** **45°: 27mm**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,800**
Dimensions (L x W x H) Dimensi 体积	**283x158x172mm** **(11-1/8x6-1/4x6-3/4")**
Net Weight Berat Bersih 淨重	**2.5 - 3.0kg (5.5 - 6.6lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**16 m with BL1850B** **Cutting 600mm groove in brick Depth 10mm** **(Dry type 125mm Diamond Wheel)**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5



VIDEO CLIP
Models and specs may vary by country
AWS

AWS
Auto - start Wireless System

Switch on the tool, and Vacuum cleaner is activated
Sistem permulaan wayarles automatik 无线自动启动系统


It has been impossible, but now Vacuum cleaner can be automatically activated by Cordless tools with our newly developed wireless system
hidupkan alat dan pembersih vakum akan diaktifkan pembersih vakum boleh diaktifkan secara automatik oleh alat tanpa kord dengan Sistem permulaan wayarles automatik baru
启动工具，吸尘器自动开启我们新研发的无线系统可以通过无线工具自动激活吸尘器



Bluetooth® AWS connects to power tool with Bluetooth
AWS menyambungkan alat melalui Bluetooth AWS通过蓝牙连接电动工具


The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Makita is under license.
Other trademarks and trade names are those of their respective owners.

ADT
Automatic Torque Drive Technology
Teknologi Tork Automatik
自动扭力驱动科技



Automatically changes the cutting speed according to load conditions for an optimum operation
Fungsi pertukaran kalajuan automatik 自动变速功能

AFT
Active Feedback Sensing Technology
Teknologi Sensor Maklum Balas Automatik
自动回顾感应科技



Shuts down the tool to protect the user, if the rotation speed suddenly slows down
Jika kelajuan putaran tiba-tiba dikurangkan, alat akan dimatikan secara automatik untuk melindungi pengguna
若旋转速度突然降低，工具将自动关闭以保护保护使用者

XLOCK
Kunci Mata Pengisar X
砂轮X锁



DGA419, DGA519 only

Just one click to attach the accessories and easy removal just simply pull the lever
Hanya dengan satu klik untuk memasang aksesori dan mudah dilepas hanya tarik tuas
只需单击一下即可安装配件，只需拔下杠杆即可轻松拆卸

BL MOTOR
Motor tanpa berus
无碳刷马达



Faster Cutting with High power and High torque brushless motor
Pemotongan yang lebih cepat dengan motor tanpa berus berkuasa tinggi
无碳刷马达使切割更快速

BRAKE
Electric Brake System
Sistem Brek Elektrik
电子自动刹车系统

Electric brake is activated after the tool is switched off
Brek elektrik diaktifkan selepas alat dimatikan
电子自动刹车在工具关闭后被启动

DGA419Z 100mm (4") RM 1,707
Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机

Paddle Switch
Suis Pemicu 扳机开关



- **X-LOCK for toolless accessory changes**

Standard Equipment: Grinding Wheel (E-00496), Wheel Cover, Side Grip

- Z: Without Charger & Battery

Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
Hole Diameter Diameter Lubang 孔直径	**22.23mm (7/8")**
Max Wheel Thickness Ketebalan Roda Maksimum 最大轮片厚度	**6mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,000 - 8,500**
Dimensions (L x W x H) Dimensi 体积	**396x117x147mm (15-1/2"x4-5/8"x5-3/4")**
Net Weight Berat Bersih 净重	**2.4 - 3.0kg (5.3 - 6.6lbs.)**

DGA411Z 100mm (4") RM 1,103
Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



Top Slide Switch
Suis Gelangsar Atas 顶部滑动开关
Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan 方便左右握子

- **Spiral bevel gear for more efficient transfer of energy**



Standard Equipment: Grinding Wheel (A-80852), Wheel Cover, Side Grip, Lock Nut Wrench

- Z: Without Charger & Battery

Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,000 - 8,500**
Dimensions (L x W x H) Dimensi 体积	**BL1850B: 382x117x140mm (15"x4-5/8"x5-1/2")**
Net Weight Berat Bersih 净重	**2.2 - 2.8kg (4.8 - 6.1lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**8 min with BL1850B** **Metal Sanding** **Pressing Load of 30N, 3000rpm**

***All list price shown are for reference only (exclude SST).**
*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DGA414Z 100mm (4")
RM 1,637

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



Top Slide Switch
Suis Gelangsar Atas 顶部滑动开关
Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan 方便左右握子



- **Auto-start Wireless System (AWS) connects to compatible vacuum cleaners with Bluetooth**

Standard Equipment: Grinding Wheel (A-80852), Wheel Cover, Side Grip, Lock Nut Wrench

- Z: Without Charger & Battery

Wheel Diameter Diameter Roda 轮片直径	100mm (4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	3,000 - 8,500
Dimensions (L x W x H) Dimensi 体积	BL1850B: 382x117x147mm (15"x4-5/8"x5-3/4")
Net Weight Berat Bersih 淨重	2.2 - 2.8kg (4.9 - 6.3lbs.)
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	8 min with BL1850B Metal Sanding Pressing Load of 30N, 3000rpm

DGA418Z 100mm (4")
RM 1,707

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



Paddle Switch
Suis Pemicu 扳机开关



- **Auto-start Wireless System (AWS) connects to compatible vacuum cleaners with Bluetooth**

Standard Equipment: Grinding Wheel (A-80852), Wheel Cover, Side Grip, Lock Nut Wrench

- Z: Without Charger & Battery

Wheel Diameter Diameter Roda 轮片直径	100mm (4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	3,000 - 8,500
Dimensions (L x W x H) Dimensi 体积	BL1850B: 382x117x146mm (15"x4-5/8"x5-3/4")
Net Weight Berat Bersih 淨重	2.2 - 2.9kg (5.0 - 6.3lbs.)
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	8 min with BL1850B Metal Sanding Pressing Load of 30N, 3000rpm

DGA406RME | DGA406RFE | DGA406Z 100mm (4")
DGA406RME RM 2,207 | DGA406RFE RM 2,042 | DGA406Z RM 1,067

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



Top Slide Switch
Suis Gelangsar Atas 顶部滑动开关
Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan 方便左右握子



- **Electric brake for increased operator safety**

Standard Equipment: Grinding Wheel (A-80852), Wheel Cover, Side Grip, Lock Nut Wrench

- RME: 1x Rapid Charger, 2x 4.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Wheel Diameter Diameter Roda 轮片直径	100mm (4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	8,500
Dimensions (L x W x H) Dimensi 体积	362x117x146mm (14-1/4"x4-5/8"x5-3/4")
Net Weight Berat Bersih 淨重	2.18 - 2.77kg (4.81 - 6.12lbs)
Work Amount (approx.) Jumlah Kerja 工作量	12 m with BL1850B Cutting Concrete Depth 10mm

DGA408RME | DGA408RFE | DGA408Z 100mm (4")
DGA408RME RM 2,277 | DGA408RFE RM 2,113 | DGA408Z RM 1,138

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



Paddle Switch
Suis Pemicu 扳机开关



- **Efficiency for heavy-duty grinding applications**

Standard Equipment: Grinding Wheel (A-80852), Wheel Cover, Side Grip, Lock Nut Wrench

- RME: 1x Rapid Charger, 2x 4.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Wheel Diameter Diameter Roda 轮片直径	100mm (4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	8,500
Dimensions (L x W x H) Dimensi 体积	362x117x146mm (14-1/4"x4-5/8"x5-3/4")
Net Weight Berat Bersih 淨重	2.18 - 2.80kg (4.81 - 6.17lbs)
Work Amount (approx.) Jumlah Kerja 工作量	12 m with BL1850B Cutting Concrete Depth 10mm

DGA404RTE | DGA404RFE | DGA404Z 100mm (4")
DGA404RTE RM 2,277 | DGA404RFE RM 1,967 | DGA404Z RM 992

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



Top Slide Switch
Suis Gelangsar Atas 顶部滑动开关
Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan 方便左右握子



- **Efficient internal cooling for optimum performance**

Standard Equipment: Grinding Wheel (A-80852), Wheel Cover, Side Grip, Lock Nut Wrench

- RTE: 1x Rapid Charger, 2x 5.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Wheel Diameter Diameter Roda 轮片直径	100mm (4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	8,500
Dimensions (L x W x H) Dimensi 体积	362x117x140mm (14-1/4"x4-5/8"x5-1/2")
Net Weight Berat Bersih 淨重	2.10 - 2.71kg (4.63 - 5.98lbs)
Work Amount (approx.) Jumlah Kerja 工作量	12 m with BL1850B Cutting Concrete Depth 10mm

DGA404/DGA454/DGA504

VIDEO CLIP
Models and specs may vary by country

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DGA405RFE | DGA405Z 100mm (4")

RM 2,005 | RM 1,030

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



Paddle Switch
Suis Pemicu 扳机开关



- **Efficient internal cooling for optimum performance**

Standard Equipment: Grinding Wheel (A-80852), Wheel Cover, Side Handle, Lock Nut Wrench

- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

BL MOTOR XPT ADT AFT

Wheel Diameter Diameter Roda 轮片直径	100mm (4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	8,500
Dimensions (L x W x H) Dimensi 体积	362x117x140mm (14-1/4"x4-5/8"x5-1/2")
Net Weight Berat Bersih 净重	2.08 - 2.69kg (4.59 - 5.94lbs)
Work Amount (approx.) Jumlah Kerja 工作量	12 m with BL1850B Cutting Concrete Depth 10mm

DGA402RFE | DGA402Z 100mm (4")

RM 1,562 | RM 585

430 mm

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



Top Slide Switch
Suis Gelangsar Atas 顶部滑动开关
Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan 方便左右握手



- **Spiral bevel gear for more efficient transfer of energy**

Standard Equipment: Grinding Wheel (A-80852), Wheel Cover, Side Grip, Lock Nut Wrench

- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Wheel Diameter Diameter Roda 轮片直径	100mm (4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	11,000
Dimensions (L x W x H) Dimensi 体积	317x118x118mm (12-1/2"x4-5/8"x4-5/8")
Net Weight Berat Bersih 净重	1.90 - 2.51kg (4.19 - 5.5 lbs)
Work Amount (approx.) Jumlah Kerja 工作量	13.5 m with BL1850B Cutting Concrete Depth 5mm

DGA456RFE | DGA456Z 115mm (4-1/2")

RM 2,062 | RM 1,087

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



Top Slide Switch
Suis Gelangsar Atas 顶部滑动开关
Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan 方便左右握手



- **Efficiency for heavy-duty grinding applications**

Standard Equipment: Grinding Wheel (A-80640), Wheel Cover, Side Handle, Lock Nut Wrench

- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

BL MOTOR XPT ADT AFT BRAKE

Wheel Diameter Diameter Roda 轮片直径	115mm (4-1/2")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	8,500
Dimensions (L x W x H) Dimensi 体积	362x130x151mm (14-1/4"x5-1/8"x5-15/16")
Net Weight Berat Bersih 净重	2.34 - 3.03kg (5.17 - 6.67lbs)
Work Amount (approx.) Jumlah Kerja 工作量	12 m with BL1850B Cutting Concrete Depth 10mm

DGA458RFE | DGA458Z 115mm (4-1/2")

RM 2,148 | RM 1,173

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



Paddle Switch
Suis Pemicu 扳机开关



- **Electric brake for increased operator safety**

Standard Equipment: Grinding Wheel (A-80640), Wheel Cover, Side Handle, Lock Nut Wrench

- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

BL MOTOR XPT ADT AFT BRAKE

Wheel Diameter Diameter Roda 轮片直径	115mm (4-1/2")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	8,500
Dimensions (L x W x H) Dimensi 体积	362x130x151mm (14-1/4"x5-1/8"x5-15/16")
Net Weight Berat Bersih 净重	2.34 - 3.03kg (5.17 - 6.67lbs)
Work Amount (approx.) Jumlah Kerja 工作量	12 m with BL1850B Cutting Concrete Depth 10mm

DGA452RME | DGA452RFE | DGA452Z 115mm (4-1/2")

RM 1,740 | RM 1,575 | RM 600

430 mm

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



Top Slide Switch
Suis Gelangsar Atas 顶部滑动开关
Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan 方便左右握手



- **Compact barrel grip for easy handling**

Standard Equipment: Grinding Wheel (A-80640), Wheel Cover, Side Handle, Lock Nut Wrench

- RME: 1x Rapid Charger, 2x 4.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Wheel Diameter Diameter Roda 轮片直径	115mm (4-1/2")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	11,000
Dimensions (L x W x H) Dimensi 体积	317x129x126mm (12-1/2"x5-1/8"x5")
Net Weight Berat Bersih 净重	2.06 - 2.71kg (4.53 - 5.97lbs)
Work Amount (approx.) Jumlah Kerja 工作量	25 m with BL1850B Cutting Concrete Depth 5mm

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

Cordless Angle Grinder

Pengisar Sudut Tanpa Kord
充电式角向磨光机



XLOCK

JUST ONE CLICK TO ATTACH THE ACCESSORIES AND EASY REMOVAL
JUST SIMPLY PULL THE LEVER
Hanya dengan satu klik untuk memasang aksesori dan mudah dilepas hanya tarik tuas
只需单击一下即可安装配件，只需拔下杠杆即可轻松拆卸








INSTALLATION



REMOVAL



DGA519Z 125mm (5")

RM 1,747

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



Paddle Switch
Suis Pemicu 扳机开关



- **X-LOCK for toolless accessory changes**

Standard Equipment: Grinding Wheel (E-00402), Wheel Cover, Side Grip

- Z: Without Charger & Battery

BL MOTOR XPT ADT AFT BRAKE XLOCK

Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
Hole Diameter Diameter Lubang 孔直径	**22.23mm (7/8")**
Max Wheel Thickness Ketebalan Roda Maksimum 最大轮片厚度	**6mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,000 - 8,500**
Dimensions (L x W x H) Dimensi 体积	**396x140x147mm (15-1/2"x5-1/2"x5-3/4")**
Net Weight Berat Bersih 淨重	**2.5 - 3.1kg (5.5 - 6.8lbs.)**

DGA511Z 125mm (5")

RM 1,140

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



Top Slide Switch
Suis Gelangsar Atas 顶部滑动开关
Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan 方便左右握手



- **Spiral bevel gear for more efficient transfer of energy**

Standard Equipment: Grinding Wheel (A-80656), Wheel Cover, Side Grip, Lock Nut Wrench

- Z: Without Charger & Battery

BL MOTOR XPT ADT AFT

Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,000 - 8,500**
Dimensions (L x W x H) Dimensi 体积	**BL1850B: 382x140x145mm (15"x5-1/2"x5-3/4")**
Net Weight Berat Bersih 淨重	**2.3 - 3.0kg (5.1 - 6.6lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**13.8 m with BL1850B** **Cutting Concrete Depth 10mm**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DGA514Z 125mm (5")
RM 1,675

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机

Top Slide Switch
Suis Gelangsar Atas 顶部滑动开关
Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan 方便左右握子



- **Auto-start Wireless System (AWS) connects to compatible vacuum cleaners with Bluetooth**

Standard Equipment: Grinding Wheel (A-80656), Wheel Cover, Side Grip, Lock Nut Wrench

- Z: Without Charger & Battery

Wheel Diameter Diameter Roda 轮片直径	125mm (5")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	3,000 - 8,500
Dimensions (L x W x H) Dimensi 体积	BL1850B: 382x140x151mm (15"x5-1/2"x5-15/16")
Net Weight Berat Bersih 淨重	2.4 - 3.0kg (5.2 - 6.7lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	13.8 m with BL1850B Cutting Concrete Depth 10mm

DGA518Z 125mm (5")
RM 1,747

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



Paddle Switch
Suis Pemicu 扳机开关



- **Auto-start Wireless System (AWS) connects to compatible vacuum cleaners with Bluetooth**


Standard Equipment: Grinding Wheel (A-80656), Wheel Cover, Side Grip, Lock Nut Wrench

- Z: Without Charger & Battery

Wheel Diameter Diameter Roda 轮片直径	125mm (5")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	3,000 - 8,500
Dimensions (L x W x H) Dimensi 体积	BL1850B: 382x140x151mm (15"x5-1/2"x6")
Net Weight Berat Bersih 淨重	2.4 - 3.1kg (5.3 - 6.8lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	13.8 m with BL1850B Cutting Concrete Depth 10mm

DGA508RFE | DGA508Z 125mm (5")
DGA508RFE: RM 2,148 | DGA508Z: RM 1,173

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



Paddle Switch
Suis Pemicu 扳机开关



- **Electric brake for increased operator safety**

Standard Equipment: Grinding Wheel (A-80656), Wheel Cover, Side Handle, Lock Nut Wrench

- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Wheel Diameter Diameter Roda 轮片直径	125mm (5")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	8,500
Dimensions (L x W x H) Dimensi 体积	362x140x151mm (14-1/4"x5-1/2"x5-15/16")
Net weight Berat Bersih 淨重	2.35 - 3.83kg (5.18 - 8.45lbs)
Work Amount (approx.) Jumlah Kerja 工作量	13.8 m with BL1850B Cutting Concrete Depth 10mm

DGA505RFE | DGA505Z 125mm (5")
DGA505RFE: RM 2,042 | DGA505Z: RM 1,067

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



Paddle Switch
Suis Pemicu 扳机开关



- **Efficient internal cooling for optimum performance**

Standard Equipment: Grinding Wheel (A-80656), Wheel Cover, Side Handle, Lock Nut Wrench

- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Wheel Diameter Diameter Roda 轮片直径	125mm (5")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	8,500
Dimensions (L x W x H) Dimensi 体积	362x140x145mm (14-1/4"x5-1/2"x5-3/4")
Net weight Berat Bersih 淨重	2.26 - 3.73kg (4.98 - 8.23lbs)
Work Amount (approx.) Jumlah Kerja 工作量	13.8 m with BL1850B Cutting Concrete Depth 10mm

Model No. 型号			No Load Speed (rpm) Kelajuan Tanpa Beban 回转数	Switch Suis 开关	BL MOTOR	AFT	ADT	BRAKE	AWS	Anti-restart function Fungsi restart semula 防重启功能	XLOCK
100mm	115mm	125mm									
DGA414	-	DGA514	3,000 - 8,500	Slide	●	●	●	●	●	●	
DGA411	-	DGA511	3,000 - 8,500	Slide	●	●	●			●	
DGA406	DGA456	-	8,500	Slide	●	●	●	●		●	
DGA404	-	-	8,500	Slide	●	●	●			●	
DGA402	DGA452	-	11,000	Slide						●	
DGA419	-	DGA519	3,000 - 8,500	Paddle	●	●	●	●		●	●
DGA418	-	DGA518	3,000 - 8,500	Paddle	●	●	●	●	●	●	
DGA405	-	DGA505	8,500	Paddle	●	●	●			●	
DGA408	DGA458	DGA508	8,500	Paddle	●	●	●	●		●	


***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DGD800Z
RM 628 — 430

Cordless Die Grinder
Pengisar Tanpa Kord
充电式刻磨机



- Slide switch with lock-on for operator convenience




Standard Equipment: Wrench x2

- Z: Without Charger & Battery

Capacity Kapasiti 能力	Collet : 3mm - 8mm
Wheel Diameter Diameter Roda 轮片直径	38mm (1-1/2")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	26,000
Dimensions (L x W x H) Dimensi 体积	402x82x118mm (15-3/4"x3-1/4"x4-5/8")
Net Weight Berat Bersih 淨重	1.7 - 2.2kg (3.8 - 4.9lbs)
Work Amount (approx.) Jumlah Kerja 工作量	9.0 g with BL1850B Grinding Steel Plate SS400

DGD801Z
RM 628 — 430

Cordless Die Grinder
Pengisar Tanpa Kord
充电式刻磨机



- Round collet nut reduces the risk of damages



Standard Equipment: Wrench x2

- Z: Without Charger & Battery

Capacity Kapasiti 能力	Collet : 3mm - 8mm
Wheel Diameter Diameter Roda 轮片直径	38mm (1-1/2")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	25,000
Dimensions (L x W x H) Dimensi 体积	307x82x118mm (12-1/8"x3-1/4"x4-5/8")
Net Weight Berat Bersih 淨重	1.5 - 2.0kg (3.3 - 4.3lbs)
Work Amount (approx.) Jumlah Kerja 工作量	9.5 g with BL1850B Grinding Steel Plate SS400

DPO600Z | DPO500Z
RM 2,528 | RM 2,515

Cordless Random Orbit Polisher
Pelicin Orbit Tanpa Kord
充电式砂光机



- Selectable two rotation mode: normal mode & finishing mode



Standard Equipment: Hex Wrench

- Z: Without Charger & Battery

DPO500/DPO600 VIDEO CLIP Models and specs may vary by country

Pad Size Saiz Pad 垫子尺寸	150mm (6") DPO600 125mm (5") DPO500
Orbits Per Minute (OPM) Bilangan Putaran 轨道转数	Normal mode: 0 - 6,800 Finishing mode: 0 - 5,200
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	Normal mode: 0 - 13,600 Finishing mode: 0 - 10,400
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	Normal mode: 0 - 780 Finishing mode: 0 - 600
Orbit Diameter Kelajuan Tanpa Beban 回转数	5.5mm (7/32")
Dimensions (L x W x H) Dimensi 体积	530x148x126mm DPO600 (20-7/8"x5-7/8"x5") 530x123x134mm DPO500 (20-7/8"x4-7/8"x5-1/4")
Net Weight Berat Bersih 淨重	3.1 - 3.6kg (6.8 - 7.9lbs.)
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	30min with BL1860B Finishing Mode

DPV300Z
RM 1,600

Cordless Sander Polisher
Penggilap Tanpa Kord
充电式打蜡抛光机



- Electronic speed control maintains constant speed under load, critical for a professional finish




Standard Equipment: Side Grip, Pad, Adapter, Wool Pad, Sponge Pad

- Z: Without Charger & Battery

Pad / Disc Diameter Diameter Pad / Cakera 垫/盘直径	Hook & Loop Style: 80mm (3-1/8") Twist-On / Twist-Off Style: 50mm (2")
Backing Pad Diameter Diameter Pad 衬垫直径	Hook & Loop Style: 75mm (2-15/16") Twist-On / Twist-Off Style: 46mm (1-13/16")
Head Length Panjang Kepala 头长度	127 mm (5")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	Polishing: 0 - 2,800 | Sanding: 0 - 9,500
Dimensions (L x W x H) Dimensi 体积	160x79x256mm (6-5/16x3-1/8x10-1/8")
Net Weight Berat Bersih 淨重	2.0 - 2.6kg (4.4 - 5.7lbs.)
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	34min with BL1850B

DBS180Z 9mm x 533mm (3/8" x 21")
RM 1,950

Cordless Belt Sander
Pelicin Pita Tanpa Kord
充电式带式砂光机



- High power BL motor provides high performance



Standard Equipment: Sanding Belt, Grip, Grip Base

- Z: Without Charger & Battery

DBS180 VIDEO CLIP Models and specs may vary by country

Belt Width Lebar Pita 砂带宽度	6mm (1/4") | 9mm (3/8") | 13mm (1/2")
Belt Length Panjang Pita 砂带长度	533mm (21")
Belt Speed Kelajuan Pita 砂带速度	600 - 1,700 m/min
Dimensions (L x W x H) Dimensi 体积	500x96x116mm (19-3/4x3-3/4x4-9/16")
Net Weight Berat Bersih 淨重	1.8 - 2.1kg (4.0 - 4.6lbs.)

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DSL800Z 225mm (8-7/8")
RM 5,407

Cordless Drywall Sander
Pelicin Drywall Tanpa Kord
充电式石膏板砂光机



- **Easy handling by cordless**



Standard Equipment: Abrasive Disc, Hex Wrench, Tool Bag

- Z: Without Charger & Battery

VIDEO CLIP
Models and specs may vary by country
DSL800

Pad diameter Diameter Pad 垫片直径	**210mm (8-1/4")**
Abrasive Disc Size Saiz Cakera 磨盘尺寸	**225mm (8-7/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**1,000 - 1,800**
Dimensions (L x W x H) Dimensi 体积	**1,100-1,520x259x273mm (43-1/4"-59-3/4"x10-1/4"x10-3/4")**
Net Weight Berat Bersih 淨重	**4.5 - 5.7kg (10.0 - 12.6lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**35 min with BL1850B** **Speed Dial 3**

DSL801Z 225mm (8-7/8")
RM 5,407

Cordless Drywall Sander
Pelicin Drywall Tanpa Kord
充电式石膏板砂光机



- **Redesigned dust collection brush reduces dust leakage**



Standard Equipment: 1pc Abrasive Disc #120, Hex Wrench, Tool Bag (195638-5)(without inner tray)

- Z: Without Charger & Battery

Pad diameter Diameter Pad 垫片直径	**210mm (8-1/4")**
Abrasive Disc Size Saiz Cakera 磨盘尺寸	**225mm (8-7/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**1,000 - 1,800**
Dimensions (L x W x H) Dimensi 体积	**1,100-1,520x259x273mm (43-1/4"-59-3/4"x10-1/4"x10-3/4")**
Net Weight Berat Bersih 淨重	**4.5 - 5.7kg (10.0 - 12.6lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**35 min with BL1850B** **Speed Dial 3**

DBO380RTJ | DBO380Z
RM 2,178 | RM 893

Cordless Finishing Sander
Pengampelas Tanpa Kord
充电式砂光机



- **High capacity dust box with built-in vacuum adaptor for improved dust collection**

NEW BARU 新



Standard Equipment:
Dust Box, Punch Plate,
Abrasive Paper Grit 120 x1, Battery Protector

- RTJ: 1x Rapid Charger, 2x 5.0Ah Battery, 1x Makpac Connector Box
- Z: Without Charger & Battery

*Not applicable for Z model

Pad Size Saiz Pad 垫子尺寸	**93 x 185mm (3-5/8x7-1/4")**
Abrasive Paper Size Saiz Kertas Pasir 砂纸尺寸	**Rectangular: 93 x 228mm (3-5/8x9")**
Orbits Per Minute (OPM) Bilangan Putaran 轨道转数	**4,000, 8,000, 12,000**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**8,000, 16,000, 24,000**
Orbit Diameter Jejaki Diameter 轨道直径	**2.0mm (1/16")**
Dimensions (L x W x H) Dimensi 体积	**336x92x169mm (13-1/4x3-5/8x6-5/8")**
Net Weight Berat Bersih 淨重	**1.9 - 2.2kg (4.2 - 4.9lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**58 min with BL1860B**

DBO180Z 125mm (5")
RM 792

Cordless Random Orbit Sander
Pelicin Orbit Tanpa Kord
充电式砂光机



- **Three speed control switch fast, medium and low**




Standard Equipment: Abrasive Paper, Dust Bag

- Z : Without Charger & Battery

Pad Diameter Diameter Pad 垫片直径	**123mm (4-7/8")**
Abrasive Disc Size Saiz Cakera 磨盘尺寸	**125mm (5")**
Orbits Per Minute (OPM) Bilangan Putaran 轨道转数	**7,000 | 9,500 | 11,000**
Dimensions (L x W x H) Dimensi 体积	**175x123x153mm (6-7/8"x4-7/8"x6")**
Net Weight Berat Bersih 淨重	**1.4 - 1.7kg (3.0 - 3.7lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**66 min with BL1850B** **Low Speed Sanding**

DTM52RTJX1 | DTM52Z
RM 2,962 | RM 1,367

Cordless Multi Tool
Pemotong dan Pengisar Pelbagai Fungsi Tanpa Kord
充电式多功能切割打磨机



- **Compatible with STARLOCK / STARLOCK PLUS / STARLOCK MAX**

DTM52RTJX1: Dust Attachment Set (191R02-6), Oscillating Multi Tool Accessories and Plastic Case, TMA059 Plunge Cut Saw Blade 32 (B-64939), TMA047 Bow Shape Plunge Cut Saw Blade 32 (B-64814), MAM001 Bow Shape Plunge Cut Saw Blade (B-66400), TMA045 Segment Saw Blade 85 (B-64799) TMA078 Sanding Pad (B-65115), Abrasive Paper Grit 60,100,150 (10pcs each Grit)

- RTJX1: 1x Rapid Charger, 2x 5.0Ah Battery, 1x Makpac Connector Box
- Z: Without Charger, Battery & Carrying Case



*Not applicable for Z model

Oscillations Per Minute (OPM) Kelajuan Ayunan 摆动速度	**10,000 - 20,000**
Oscillation Angle Sudut Ayunan 摆动角度	**Left: 1.8° | Right: 1.8° | Total: 3.6°**
Shank Type Jenis Shank 刀柄类型	**Multi Tool: STARLOCK MAX**
Dimensions (L x W x H) Dimensi 体积	**322x95x126mm (12-5/8x3-3/4x5")**
Net Weight Berat Bersih 淨重	**1.7 - 2.0kg (3.7 - 4.4lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**320 cuts with BL1860B** **38mm thick SPF**

For DTM52RTJX1 only



TMA059 Plunge Cut Saw Blade 32 (B-64939) | TMA047 Bow Shape Plunge Cut Saw Blade 32 (B-64814) | MAM001 Bow Shape Plunge Cut Saw Blade (B-66400) | TMA045 Segment Saw Blade 85 (B-64799) | TMA078 Sanding Pad (B-65115) | Abrasive Paper Grit 60,100,150

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DTM51RFEX8 | DTM51Z

RM 2,275 | RM 1,187

Cordless Multi Tool

Pemotong dan Pengisar Pelbagai Fungsi Tanpa Kord
充电式多功能切割打磨机



- **12 Angle settings at every 30° from 0° to 360°**



Standard Equipment:
DTM51RFEX8: Oscillating multi tool accessories, Tool Box

- RFEX8: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model



Oscillations Per Minute (OPM) Kelajuan Ayunan 摆动速度	**6,000 - 20,000**
Oscillation Angle Sudut Ayunan 摆动角度	**Left: 1.6° | Right: 1.6° | Total: 3.2°**
Dimensions (L x W x H) Dimensi 体积	**340x80x122mm (13-3/8"x3-1/8"x4-13/16")**
Net Weight Berat Bersih 净重	**2.0 - 2.4kg (4.4 - 5.3lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**40 pcs with BL1850B** **Cutting**

DTM50Z

RM 1,007

Cordless Multi Tool

Pemotong dan Pengisar Pelbagai Fungsi Tanpa Kord
充电式多功能切割打磨机



- **High operating efficiency**



Standard Equipment: Hex Wrench

- Z : Without Charger & Battery

Oscillations Per Minute (OPM) Kelajuan Swing 摆动速度	**6,000 - 20,000**
Dimensions (L x W x H) Dimensi 体积	**307x80x122mm (12-1/4"x3-1/8"x4-13/16")**
Net Weight Berat Bersih 净重	**1.8 - 2.2kg (3.9 - 4.8lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**35 pcs with BL1850B** **Cutting**

DLS600Z 165mm (6-1/2")

RM 4,583

Cordless Compound Miter Saw

Gergaji Kompaun Miter Tanpa Kord
充电式斜断锯



- **High accuracy & Lightweight**



Standard Equipment: TCT Saw Blade (B-56487), Dust Bag, Vertical Vise, Hex Wrench, Triangular Rule

- Z : Without Charger & Battery

BL MOTOR ADT DXT

Blade Diameter Diameter Bilah 锯片直径	**165mm (6-1/2")**
Miter Angle Sudut Miter 斜接角	**52°L / 52°R**
Bevel Angle Sudut Bevel 斜角	**46°L / 46°R**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90° Miter: 46 x 92mm (1-13/16" x 3-5/8")** **45° Miter, L/R: 46 x 65mm (1-13/16" x 2-9/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**5,000**
Dimensions (L x W x H) Dimensi 体积	**340x400x440mm (13-3/8"x15-3/4"x17-1/4")**
Net Weight Berat Bersih 净重	**6.3 - 6.6kg (13.9 - 14.6lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**625 pcs with BL1850B** **Sawing (Round Wood Height 15 x 90mm Thick)**

DLS713RME | DLS713Z 190mm (7-1/2")

RM 5,167 | RM 4,027

441

Cordless Slide Compound Miter Saw

Gergaji Gelongsor Kompaun Miter Tanpa Kord
充电式斜断锯（滑动复合式）



- **Powerful Makita-built motor**



Standard Equipment: TCT Saw Blade (A-86147), Vertical Vise, Socket Wrench, Triangular Rule, Dust Bag, Holder Set

- RME: 1x Rapid Charger, 2x 4.0Ah Battery
- Z: Without Charger & Battery


Blade Diameter Diameter Bilah 锯片直径	**190mm (7-1/2")**
Miter Angle Sudut Miter 斜接角	**47°L / 57°R**
Bevel Angle Sudut Bevel 斜角	**45°L / 5°R**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 52 x 300mm (2-1/16" x 11-3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,200**
Dimensions (L x W x H) Dimensi 体积	**655x430x454mm (25-3/4"x17"x17-7/8")**
Net Weight Berat Bersih 净重	**12.1kg (26.7lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**300 pcs with BL1850B** **Sawing (Merbau Decking 90 x 19mm)**

DHS661RFJ | DHS661Z 165mm (6-1/2")

RM 2,853 | RM 1,877

Cordless Circular Saw

Gergaji Piring Tanpa Kord
充电式圆锯



- **Compact and Lightweight Design for Better Maneuverability**



Standard Equipment: TCT Saw Blade (B-63018), Hex Wrench, Rip Fence (Guide Rule), Dust Nozzle

- RFJ: 1x Rapid Charger, 2x 3.0Ah Battery, 1x Makpac Connector Box
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

BL MOTOR XPT ADT BRAKE AWS

Blade Diameter Diameter Bilah 锯片直径	**165mm (6-1/2")**
Hole Diameter Diameter Lubang 孔直径	**15.88mm (5/8") | 20mm (13/16")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 57mm (2-1/4")** **45°: 41mm (1-5/8")** **50°: 37mm (1-7/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**5,000**
Max Output Keluaran Maksima 最大输出	**680W**
Dimensions (L x W x H) Dimensi 体积	**270x186x250mm (10-5/8"x7-3/8"x9-7/8")**
Net Weight Berat Bersih 净重	**2.9 - 3.2kg (6.4 - 7.1lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**200 pcs with BL1850B** **Sawing with EFFICUT blade, 90° cut SPF 2 x 10 (Thickness 38mm, Width 89mm)**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DHS680RMJ | DHS680RFJ | DHS680Z 165mm (6-1/2")

RM 2,612 | RM 2,448 | RM 1,473

Cordless Circular Saw
Gergaji Piring Tanpa Kord
充电式圆锯



Opposite Handling
Cut left side of material



- **High-efficiency BL motor provides higher power**

Standard Equipment: TCT Saw Blade (B-63018), Hex Wrench, Rip Fence (Guide Rule)

- RMJ: 1x Rapid Charger, 2x 4.0Ah Battery, 1x Makpac Connector Box
- RFJ: 1x Rapid Charger, 2x 3.0Ah Battery, 1x Makpac Connector Box
- Z: Without Charger, Battery & Carrying Case

DHS680 VIDEO CLIP Models and specs may vary by country

*Not applicable for Z model

BL MOTOR ADT

Blade Diameter Diameter Bilah 锯片直径	165mm (6-1/2")
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	90°: 57mm (2-1/4") 45°: 41mm (1-5/8") 50°: 37mm (1-7/16")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	5,000
Dimensions (L x W x H) Dimensi 体积	350x170x238mm (13-3/4"x6-11/16"x9-3/8")
Net weight Berat Bersih 淨重	3.0 - 3.3kg (6.6 - 7.3lbs)
Work Amount (approx.) Jumlah Kerja 工作量	170 pcs with BL1850B Sawing with Standard Blade, 90° cut SPF 2 x 10 (Thickness 38mm, Width 89mm)

DHS630RME | DHS630RFE | DHS630Z 165mm (6-1/2") 441

RM 3,785 | RM 3,620 | RM 2,645

Cordless Circular Saw
Gergaji Piring Tanpa Kord
充电式圆锯





- **Cut up to 66mm thick wood with a single stroke**

Standard Equipment: TCT Saw Blade (D-51079), Hex Wrench, Rip Fence (Guide Rule)

- RME: 1x Rapid Charger, 2x 4.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

DHS630RME Sementara stok masih ada 售完即止 WHILE STOCK LAST

Blade Diameter Diameter Bilah 锯片直径	165mm (6-1/2")
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	90°: 66mm (2-5/8") 45°: 46mm (1-13/16")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	3,100
Dimensions (L x W x H) Dimensi 体积	346x220x247mm (13-5/8"x8-5/8"x9-3/4")
Net weight Berat Bersih 淨重	3.0 - 3.4kg (6.6 - 7.5lbs)
Work Amount (approx.) Jumlah Kerja 工作量	260 pcs with BL1850B Sawing (Mixed Wood 2" x 2")

DSS610Z 165mm (6-1/2") 441

RM 943

Cordless Circular Saw
Gergaji Piring Tanpa Kord
充电式圆锯



Opposite Handling
Cut left side of material



- **Built-in dust blower directs sawdust away from cutting line**

Standard Equipment:
Carbide-Tipped Saw Blade, Rip Fence (Guide Rule), Hex Wrench

- Z: Without Charger & Battery

Sementara stok masih ada 售完即止 WHILE STOCK LAST

Blade Diameter Diameter Bilah 锯片直径	165mm (6-1/2")
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	90°: 0-57mm (2-1/4")/ 45°: 0-40mm (1-9/16") 50°: 0-36mm (1-7/16")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	3,700
Dimensions (L x W x H) Dimensi 体积	347x202x228mm (13-5/8"x8"x9")
Net weight Berat Bersih 淨重	3.0 - 3.4kg (6.7 - 7.5lbs)
Work Amount (approx.) Jumlah Kerja 工作量	230 pcs with BL1850B Sawing (Mixed Wood 2" x 2")

DSS501Z 136mm (5-3/8") 430

RM 908

Cordless Circular Saw
Gergaji Piring Tanpa Kord
充电式圆锯





- **Compact and lightweight design**

Standard Equipment: Carbide-Tipped Saw Blade, Hex Wrench, Rip Fence (Guide Rule)

- Z: Without Charger & Battery

Sementara stok masih ada 售完即止 WHILE STOCK LAST

Blade Diameter Diameter Bilah 锯片直径	136mm (5-3/8")
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	90°: 51mm (2") 45°: 35mm (1-3/8")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	3,600
Dimensions (L x W x H) Dimensi 体积	364x183x201mm (14-3/8"x7-1/4"x7-7/8")
Net Weight Berat Bersih 淨重	2.4 - 2.7kg (5.3 - 6.0lbs)
Work Amount (approx.) Jumlah Kerja 工作量	230 pcs with BL1850B Sawing (Mixed Wood 2" x 2")





***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DJR187RME | DJR187RFE | DJR187Z

RM 2,350 | RM 2,185 | RM 1,212

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯





- **BL Brushless DC motor with high power**

Standard Equipment: Recipro Saw Blades 2pcs (B-05175 & B-05169)

- RME: 1x Rapid Charger, 2x 4.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

BL MOTOR XPT

Length of Stroke Panjang Strok 冲程长度	**32mm (1-1/4")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**High: 0 - 3,000 | Low: 0 - 2,300**
Capacity Kapasiti 能力	**Pipe: 130mm (5-1/8")** **Wood: 255mm (10")**
Dimensions (L x W x H) Dimensi 体积	**439x83x231mm (17-1/4"x3-1/4"x9-1/8")**
Net Weight Berat Bersih 淨重	**3.4 - 3.8kg (7.6 - 8.3lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**65 pcs with BL1850B** **Cutting (Steel Pipe Ø34 x 3mm)**

DJR188Z

RM 1,083

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯





- **High cutting speed (Max 3,000 SPM) provide higher cutting efficiency**

Standard Equipment:
Recipro Saw Blades 2pcs (B-20432 & B-20404)

- Z: Without Charger & Battery

BL MOTOR XPT

DJR188

VIDEO CLIP
Models and specs may vary by country

Length of Stroke Panjang Strok 冲程长度	**20mm (13/16")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 3,000**
Capacity Kapasiti 能力	**Pipe : 130mm (5-1/8")** **Wood: 255mm (10")**
Dimensions (L x W x H) Dimensi 体积	**BL1815N: 316x81x203mm (12-1/2"x3-3/16"x8")** **BL1850B: 316x81x220mm (12-1/2"x3-3/16"x8-5/8")**
Net Weight Berat Bersih 淨重	**2.6 - 2.9kg (5.7 - 6.4lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**58 pcs with BL1850B** **Cutting (Steel Pipe Ø34 x 3mm)**

DJR186RME | DJR186RFE | DJR186Z

RM 2,062 | RM 1,898 | RM 923

441

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯





- **Toolless blade change; redesign of blade clamp makes it easier to remove a blade**

Standard Equipment:
Recipro Saw Blades 2pcs (B-05175 & B-05169)

- RME: 1x Rapid Charger, 2x 4.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

XPT


Length of Stroke Panjang Strok 冲程长度	**32mm (1-1/4")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 2,800**
Capacity Kapasiti 能力	**Pipe : 130mm (5-1/8")** **Wood: 255mm (10")**
Dimensions (L x W x H) Dimensi 体积	**486x81x223mm (19-1/8"x3-3/16"x8-3/4")**
Net Weight Berat Bersih 淨重	**3.5 - 3.8kg (7.6 - 8.3lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**60 pcs with BL1850B** **Cutting (Steel Pipe Ø34 x 3mm)**

DJR181RFE

RM 1,853

441

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯





- **Toolless blade change system enables fast, one-handed blade changes**

Standard Equipment: Recipro Saw Blade

- RFE: 1x Rapid Charger, 2x 3.0Ah Battery

*Not applicable for Z model

Length of Stroke Panjang Strok 冲程长度	**28mm (1-1/8")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 2,900**
Capacity Kapasiti 能力	**Pipe : 130mm (5-1/8")** **Wood: 255mm (10")**
Dimensions (L x W x H) Dimensi 体积	**499x91x234mm (19-5/8"x3-5/8"x9-1/4")**
Net Weight Berat Bersih 淨重	**3.5kg (7.7lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**70 pcs with BL1850B** **Cutting (SPF Material 2x10")**

DJR183Z

RM 972

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯





- **Dual-position on/off switch allows for either paddle or trigger switch operation**

Standard Equipment: Recipro Saw Blades 2pcs

- Z: Without Charger & Battery

Capacity Panjang Strok 冲程长度	**Pipe : 50mm (2")** **Wood: 50mm (2")**
Length of Stroke Kelajuan Strok 冲程速度	**13mm (1/2")**
Strokes Per Minute (SPM) Kapasiti 能力	**0-3,000**
Dimensions (L x W x H) Dimensi 体积	**392x81x209mm (15-1/2"x3-3/16"x8-1/4")**
Net weight Berat Bersih 淨重	**1.5 - 1.7kg (3.3 - 3.8lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**56 pcs with BL1850B** **Cutting (SPF Material 2x10")**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DJV182RME | DJV182RFE | DJV182Z

RM 2,677 | RM 2,512 | RM 1,537

Cordless Jig Saw
Gergaji Jig Tanpa Kord
充电式线锯机





- **Powerful Brushless DC motor**

Standard Equipment: Jig Saw Blade Set (No. BR-10, BR-13, B-22, 2pcs each), Cover Plate, Anti-Splintering Device, Hex Wrench

- RME: 1x Rapid Charger, 2x 4.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

DJV181/DJV182 VIDEO CLIP Models and specs may vary by country

*Not applicable for Z model

BL MOTOR

Capacity Kapasiti 能力	**Wood: 135mm (5-5/16")** **Steel: 10mm (3/8")**
Length of Stroke Panjang Strok 冲程长度	**26mm (1")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**800 - 3,500**
Dimensions (L x W x H) Dimensi 体积	**266x77x208mm (10-1/2"x3"x8-3/16")**
Net Weight Berat Bersih 淨重	**2.4 - 2.7kg (5.2 - 5.9lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**266 pcs with BL1850B** **Sawing with Blade B-10** **Plywood (Thickness 12mm x Length 300mm)**

DJV181RFE | DJV181Z

RM 2,512 | RM 1,537

Cordless Jig Saw
Gergaji Jig Tanpa Kord
充电式线锯机





- **Excellent performance provides higher productivity**

Standard Equipment: Jig Saw Blade Set (No. BR-10, BR-13, B-22, 2pcs each), Cover Plate, Anti-Splintering Device, Hex Wrench

- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

DJV181/DJV182 VIDEO CLIP Models and specs may vary by country

*Not applicable for Z model

BL MOTOR

Capacity Kapasiti 能力	**Wood: 135mm (5-5/16")** **Steel: 10mm (3/8")**
Length of Stroke Panjang Strok 冲程长度	**26mm (1")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**800 - 3,500**
Dimensions (L x W x H) Dimensi 体积	**298x77x189mm (11-3/4"x3"x7-7/16")**
Net Weight Berat Bersih 淨重	**2.3 - 2.6kg (5.0 - 5.7lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**266 pcs with BL1850B** **Sawing with Blade B-10** **Plywood (Thickness 12mm x Length 300mm)**

DJV180RFE | DJV180Z

RM 2,237 | RM 1,262

440 mm

Cordless Jig Saw
Gergaji Jig Tanpa Kord
充电式线锯机





- **Low vibration and low noise**

Standard Equipment: Jig Saw Blade Set (No. BR-10, BR-13, B-22, 2pcs each), Cover Plate, Anti-Splintering Device, Hex Wrench

- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Capacity Kapasiti 能力	**Wood: 135mm (5-5/16")** **Steel: 10mm (3/8")**
Length of Stroke Panjang Strok 冲程长度	**26mm (1")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0-2,600**
Dimensions (L x W x H) Dimensi 体积	**257x73x208mm (10-1/8"x2-7/8"x8-3/16")**
Net Weight Berat Bersih 淨重	**2.7 - 3.0kg (6.0 - 6.7lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**216 pcs with BL1850B** **Sawing with Blade B-10** **Plywood (Thickness 12mm x Length 300mm)**

DSD180Z

RM 1,498

Cordless Drywall Saw
Gergaji Drywall Tanpa Kord
充电式石膏板切割机





- **Ideal for cutting holes in drywalls when setting ceiling lights, air vents etc**

Standard Equipment: Blade, Blade Cover, Base Cover, Hex Wrench

- Z: Without Charger & Battery

DSD180 VIDEO CLIP Models and specs may vary by country

Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 6,000**
Length of Stroke Panjang Strok 冲程长度	**6mm (1/4")**
Capacity Kapasiti 能力	**Drywall: 30mm (1-3/16")** **Wood: 15mm (9/16")**
Dimensions (L x W x H) Dimensi 体积	**263x79x291mm (10-3/8"x3-1/8"x11-3/8")**
Net weight Berat Bersih 淨重	**1.7 - 2.0kg (3.8 - 4.5lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**360 m with BL1850B** **Cutting (Gypsum Board Thickness 12.5mm/ 1ply)**


DPJ180Z

RM 1,270

430 mm

Cordless Plate Joiner
Mesin Kayu Tanpa Kord
充电式木工接合机





- **Easy blade setting system for fast blade installation**

Standard Equipment: Cutter Blade, Angle Guide, Lock Nut Wrench, Set Plate, Dust Bag

- Z: Without Charger & Battery

Blade Diameter Diameter Bilah 锯片直径	**100mm (4")**
Max Cutting Depth Kedalaman Pemotongan Maksimum 最大切割深度	**20mm (3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**6,500**
Dimensions (L x W x H) Dimensi 体积	**351x139x149mm (13-3/4"x5-1/2"x5-7/8")**
Net weight Berat Bersih 淨重	**2.8 - 3.1kg (6.2 - 6.8lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**333 pcs with BL1850B** **Biscuit (60 x 23 x 4) Cutting Slot 12.3mm**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DKP181RTJ | DKP181Z 82mm (3-1/4")

RM 3,425 | RM 2,140

Cordless Planer
Pengetam Tanpa Kord
充电式电刨



- **Auto-start Wireless System (AWS) connects to vacuum cleaner with Bluetooth**

Standard Equipment: Planer Blade, Blade Gauge, Guide Rule, Depth Guide, Socket Wrench, Sharpening Holder Assembly (for resharpenable blade)

- RTJ: 1x Rapid Charger, 2x 5.0Ah Battery, 1x Makpac Connector Box
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

BL MOTOR ADT AWS Auto-start Wireless System

Planing Width Lebar Pelan 刨削宽度	**82mm (3-1/4")**
Planing Depth Kedalaman Pelan 刨削宽度	**3mm (1/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**12,000**
Dimensions (L x W x H) Dimensi 体积	**366x156x166mm (14-3/8"x6-1/8"x6-1/2")**
Net Weight Berat Bersih 淨重	**3.3 - 3.6kg (7.3 - 7.9lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**46 m with BL1850B** 67mm wide x 1,000mm (Douglas fir) (depth 2.0mm)

VIDEO CLIP
Models and specs may vary by country
DKP181

DKP180RFE | DKP180Z 82mm (3-1/4")

RM 2,052 | RM 1,075

441

Cordless Planer
Pengetam Tanpa Kord
充电式电刨





- **Easy blade setting system for fast blade installation**

Standard Equipment: Planer Blade, Blade Gauge, Guide Rule, Socket Wrench

- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Planing Width Lebar Pelan 刨削宽度	**82mm (3-1/4")**
Planing Depth Kedalaman Pelan 刨削宽度	**2.0mm (5/64")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**14,000**
Dimensions (L x W x H) Dimensi 体积	**333x157x160mm (13-1/8"x6-3/16"x6-5/16")**
Net weight Berat Bersih 淨重	**3.2 - 3.5kg (7.1 - 7.9lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**91 m with BL1850B** Wood Thickness 1mm

Cordless Grease Gun

Alat Tembak Gris Tanpa Kord 充电式黄油枪

Max Operating Pressure
Tekanan Beroperasi Maksimum
最大操作压力
69MPa





1.2m Flexible hose enables easy operation even in tight places
Hos fleksibel 1.2m dapat dikendalikan dengan mudah walaupun di tempat yang sempit
1.2m软管即使在狭窄的地方也可以轻松操作

Applicable Grease Type
Jenis gris yang sesuai 适用黄油黏度
NLGI No.0 - No.2

DGP180RT | DGP180Z

RM 2,352 | RM 1,540

Cordless Grease Gun
Alat Tembak Gris Tanpa Kord
充电式黄油枪





- **Mainly for maintenance jobs of heavy machinery, farm machinery or other large machinery, such as greasing up, crawler track tensioning and more**

Standard Equipment: Shoulder Strap

- RT: 1x Rapid Charger, 1x 5.0Ah Battery
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Flow Rate Kadar Aliran 流量	**Auto Speed Change Mode: 290mL/min (10.0oz/min)** **Slow Speed Mode: 145mL/min (5.0oz/min)**
Grease Capacity w/ Barrel A	**Cartridge: 410g (14.5oz) | Bulk: 455g (16.0oz)**
Grease Capacity w/ Barrel B	**Cartridge: 450g (15.9oz) | Bulk: 570g (20.1oz)**
Grease Capacity w/ Barrel C Kapasiti Gris 黄油容量	**Cartridge: 500g (17.6oz) | Bulk: 570g (20.1oz)**
Hose Length Panjang Hos 软管长度	**120cm (47-1/4")**
Max Operating Pressure Tekanan Beroperasi Maksimum 最大使用气压	**69MPa (10000PSI)**
Dimensions (L x W x H) Dimensi 体积	**411x114x245mm (16-1/4x4-1/2x9-5/8")**
Net Weight Berat Bersih 淨重	**4.8 - 6.1kg (10.6 - 13.4lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**2,356mL Dispencing** (Operating pressure 60MPa at low speed range)

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DCO181Z 6.35mm (1/4")
RM 1,540

Cordless Cut-Out Tool
Mesin Pemotong Tanpa Kord
充电式石膏板开孔机



- **Auto-start Wireless System (AWS) connects to compatible vacuum cleaners with Bluetooth**



Standard Equipment: Drywall Guide Bit x2, Collet Cone, Dust Collection Cover, Wrench

- Z: Without Charger & Battery


Collet Capacity Kapasiti Collet 夹头直径	3mm (1/8") | 6mm(1/4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	32,000
Circumference of Grip Portion Lingkaran Pemegang 握把周长	210mm (8-1/4")
Dimensions (L x W x H) Dimensi 体积	311x79x117mm (12-1/4x3-1/8x4-5/8")
Net Weight Berat Bersih 净重	1.4 - 1.7kg (3.1 - 3.7lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	Up to 32 cuts for a drywall of ½ inch (12.7mm) thickness with cutting length of 910mm using drywall guide tip bit 6.35mm with BL1830B

VIDEO CLIP
Models and specs may vary by country
DCO181

DCO180Z 6.35mm (1/4")
RM 682

430 mm

Cordless Cut-Out Tool
Mesin Pemotong Tanpa Kord
充电式石膏板开孔机



- **Accepts both 1/8" and 1/4" bits**



Standard Equipment: Drywall Guide Bit x2, Collet Nut, Collet Cone 6.35mm (1/4")

- Z: Without Charger & Battery

Capacity Kapasiti 能力	Collet : 3.18mm (1/8") or 6.35mm (1/4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	30,000
Dimensions (L x W x H) Dimensi 体积	296x77x118mm (11-5/8"x3"x4-5/8")
Net weight Berat Bersih 净重	1.5 - 1.8kg (3.3 - 4.0lbs)
Work Amount (approx.) Jumlah Kerja 工作量	225 m with BL1850B 6.35mm Bit Cutting Plaster Board 1.2 x 800mm

DVP180Z
RM 2,632

Cordless Vacuum Pump
Pam Vakum Tanpa Kord
充电式真空泵



- **For air purge during installation of room air conditioner**



Standard Equipment: Vacuum Pump Oil, Adapter

- Z: Without Charger & Battery

Flow Rate Kadar Aliran 流量	50L/min
Ultimate Vacuum Tahap Maksimum Vakum 最大真空度	20Pa (150 microns)
Motor Speed Kelajuan Motor 马达速度	3,840min⁻¹
Oil Tank Capacity Kapasiti Tangki Minyak 润滑油箱	115mL
Inlet Port Pelabuhan Inlet 进气管直径	5/16"
Dimensions (L x W x H) Dimensi 体积	265x93x175mm (10-3/8"x3-5/8"x6-7/8")
Net Weight Berat Bersih 净重	3.5kg
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	50 min with BL1850B

DRT50Z | DRT50ZJX9 6mm (1/4"), 8mm (3/8")
DRT50Z RM 1,192 | DRT50ZJX9 RM 2,127

Cordless Trimmer
Mesin Perapi Tanpa Kord
充电式修边机



- **Faster Trimming than Corded**

VIDEO CLIP
Models and specs may vary by country
DRT50



Trimmer Base Assembly
For DRT50ZJX9 only



Standard Equipment: Trimmer Base Assembly (196612-6), Collet Cone, Dust Noozle, Straight Guide Assembly, Wrench x2

- Z : Without Charger, Battery & Carrying Case
- ZJX9 : Tilt Base Assembly (195561-4), Plunge Base Assembly (195563-0), Side Grip, Templet Guide, Guide Rail Adapter Set, Guide Holder Set, Makpac Connector Box, Without Charger & Battery

*Not applicable for Z model

Collet Capacity Kapasiti Collet 夹头直径	6mm, 8mm or 1/4", 3/8"
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	10,000 - 30,000
Plunge Capacity Kapasiti Plunge 能力	Trimmer Base: 0 - 40mm (0" - 1-9/16") Plunge Base: 0 - 35mm (0" - 1-3/8")
Dimensions (L x W x H) Dimensi 体积	134x89x226mm (5-1/4"x3-1/2"x8-7/8")
Net Weight Berat Bersih 净重	1.8 - 2.1kg (3.9 - 4.6lbs)
Work Amount (approx.) Jumlah Kerja 工作量	83 m with BL1850B Routing Ø6 x 4mm



Trimmer Base Assembly (Optional)

Trimmer Base
Part No. 196612-6





Plunge Base
Part No. 195563-0
(Optional)

Tilt Base
Part No. 195561-4
(Optional)





Offset Base
Part No. 196922-1
(Optional)

***All list price shown are for reference only (exclude SST).**
*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DFN350Z
RM 3,672

Cordless Brad Nailer
Mesin Pemaku Tanpa Kord
充电式打钉机



- **Ideal for Light Duty Applications such as Fastening Chamfer Strip to Concrete Form Plywood Wall**





Standard Equipment: Safety Goggles, Nose Adapter, Hex Wrench, Belt Clip

- Z : Without Charger & Battery


Capacity Kapasiti 能力	**Length: 15 - 35mm (5/8" - 1-3/8") Gauge: 18Ga**
Magazine Capacity Bilangan Staples 装钉个数	**110**
Dimensions (L x W x H) Dimensi 体积	**257x79x228mm (10-1/8"x3-1/8"x9")**
Net Weight Berat Bersih 净重	**2.1 - 2.4kg (4.6 - 5.3lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**4000pcs with BL1850B**

Accessories (optional)

Description	Size	Pcs/ Box	Part No.
Brad Nail 15mm (5/8")	F15	5,000	B-04307
Brad Nail 20mm (3/4")	F20	5,000	B-04313
Brad Nail 25mm (1")	F25	5,000	B-04329
Brad Nail 30mm (1-3/16")	F30	5,000	B-04335
Brad Nail 35mm (1-3/8")	F35	5,000	B-04357

DPT353Z
RM 2,560

Cordless Pin Nailer
Mesin Pemaku Tanpa Kord
充电式打钉机



- **Shoots 6,400 nails on a single full BL1860B charge**





Standard Equipment: Nose Adapter, Safety Goggles, Belt Clip

- Z : Without Charger & Battery

DPT353 VIDEO CLIP Models and specs may vary by country

Capacity Staple 钉种	**Length: 15, 18, 25, 30, 35mm (5/8", 11/16", 1", 1-3/16", 1-3/8") Dia.: 0.6mm (1/32") Gauge: 23Ga**
Magazine Capacity Bilangan Staples 装钉个数	**120**
Dimensions (L x W x H) Dimensi 体积	**257x79x226mm (10-1/8"x3-1/8"x8-7/8")**
Net Weight Berat Bersih 净重	**2.0 - 2.3kg (4.4 - 5.1lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**5300 pcs Pin Nail with BL1850B**

Accessories (optional)

Description	Size	Pcs/ Box	Part No.
Pin Nail 18mm (11/16")	P18	10,000	F-31825
Pin Nail 25mm (1")	P25	10,000	F-31838
Pin Nail 30mm (1-3/16")	P30	10,000	F-31841
Pin Nail 35mm (1-3/8")	P35	10,000	F-31854


DST121ZK
RM 2,975

Cordless Stapler
Stapler Tanpa Kord
充电式钉枪



- **Contact arm mechanism enables "continuous nailing" and "drag nailing"**





Standard Equipment: Safety Goggles (195246-2), Nose Adapter, Belt Clip

- ZK: With Carrying Case, Without Charger & Battery

Staple Staple 钉种	**Width: 10mm (3/8") | Length: 13 - 25mm (1/2 - 1") Size: 1.2 x 0.6mm**
Magazine Capacity Bilangan Staples 装钉个数	**100**
Dimensions (L x W x H) Dimensi 体积	**260x79x216mm (10-1/4x3-1/8x8-1/2")**
Net Weight Berat Bersih 净重	**2.2 - 2.5kg (4.9 - 5.5lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**4000 pcs with BL1850B**

Accessories (optional)

Description	Length	Part No.
Staple 1010J	10mm	B-04466
Staple 1013J	13mm	B-04472
Staple 1016J	16mm	B-04488
Staple 1019J	19mm	B-04494
Staple 1022J	22mm	B-04503
Staple 1025J	25mm	B-04519


DST221Z
RM 1,983

Cordless Stapler
Stapler Tanpa Kord
充电式钉枪



- **Compact and powerful stapler can drive a wide range of 10mm staple lengths**





Standard Equipment: Safety Goggles, Hook

- Z : Without Charger & Battery

Staple Staple 钉种	**Width: 10mm (3/8") Length: 10, 13, 16, 19, 22mm (3/8", 1/2", 5/8", 3/4", 7/8") Gauge: 0.6 x 1.2mm (1/32" x 1/16")**
Magazine Capacity Bilangan Staples 装钉个数	**98**
Dimensions (L x W x H) Dimensi 体积	**251x91x212mm (9-7/8"x3-5/8"x8-3/8")**
Net Weight Berat Bersih 净重	**2.1 - 2.4kg (4.7 - 5.3lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**3000 pcs with BL1850B Stapler Width 10mm**

Accessories (optional)

Description	Length	Pcs/ Box	Part No.
Staple 1010HD	10mm (3/8")	5,040	F-32647
Staple 1013HD	13mm (1/2")	5,040	F-32650
Staple 1016HD	16mm (5/8")	5,040	F-32663
Staple 1019HD	19mm (3/4")	5,040	F-32676
Staple 1022HD	22mm (7/8")	5,040	F-32689


DST421ZK
RM 2,975

Cordless Stapler
Stapler Tanpa Kord
充电式钉枪



- **Contact arm mechanism enables "continuous nailing" and "drag nailing"**





Standard Equipment: Safety Goggles (195246-2), Nose Adapter, Belt Clip

- ZK: With Carrying Case, Without Charger & Battery

Staple Staple 钉种	**Width: 4mm | Length: 13 - 25mm (1/2 - 1") Size: 1.2 x 0.6mm**
Magazine Capacity Bilangan Staples 装钉个数	**100**
Dimensions (L x W x H) Dimensi 体积	**260x79x216mm (10-1/4x3-1/8x8-1/2")**
Net Weight Berat Bersih 净重	**2.2 - 2.5kg (4.9 - 5.5lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**4000 pcs with BL1850B**

Accessories (optional)

Description	Length	Part No.
Staple 410J	10mm	B-04400
Staple 413J	13mm	B-04416
Staple 416J	16mm	B-04422
Staple 419J	19mm	B-04438
Staple 422J	22mm	B-04444
Staple 425J	25mm	B-04450

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DVR450Z 1,200mm (4.0ft)
RM 1,617

Cordless Concrete Vibrator
Penggetar Konkrit Tanpa Kord
充电式混凝土振动器





- **Makita-built motor delivers 13,000VPM to help increase strength of concrete**

- Z: Without Charger & Battery

Diameter of Vibrator Diameter Penggetar 振动器的直径	**25mm (1")**
Flexible Shaft Assembly Length Panjang Pemasangan Fleksibel 柔性轴组件长度	**1,200mm (4.0 ft)**
Vibrations Per Minute (VPM) Getaran Setiap Minit 每分钟振动	**13,000**
Dimensions (L x W x H) Dimensi 体积	**1,483x93x250mm (58-1/2"x3-5/8"x9-7/8")**
Net Weight Berat Bersih 淨重	**3.3 - 3.8kg (7.3 - 8.3lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**41 min with BL1850B**

DCG180RFE | DCG180RFEB | DCG180ZB | DCG180Z
DCG180RFE RM 2,388 | DCG180RFEB RM 2,443 | DCG180ZB RM 1,468 | DCG180Z RM 1,413

Cordless Caulking Gun
Pistol Caulking Tanpa Kord
充电式填缝枪







- **5 Speed dial optimizes flow rate 0 - 28mm/sec**

Standard Equipment:
RFE / Z: 300mL Holder A, Holder Joint A, Piston, Rack 42, Safety Goggles
RFEB / ZB: 600mL Holder B, Holder Joint B, Piston, Nozzle, Rubber Ring, Rack 64, Safety Goggles

- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- RFEB: 1x Rapid Charger, 2x 3.0Ah Battery
- ZB: Without Charger, Battery & Carrying Case
- Z: Without Charger, Battery & Carrying Case

*Not applicable for Z & ZB model

DCG180 VIDEO CLIP Models and specs may vary by country

Max Dispersing Force Tujahan Maksimum 最大推力	**5,000N (1,100lbs)**
No Load Speed Kelajuan Tanpa Beban 回转数	**0 - 28mm/sec. (0 - 66in/min.)**
Holder Size Kapasiti 容量	**300mL | 600mL (Optional Accessories 800mL Holder)**
Dimensions (L x W x H) Dimensi 体积	**404x108x281mm (15-7/8"x4-1/4"x11-1/8")**
Net Weight Berat Bersih 淨重	**2.1 - 3.0kg (4.7 - 6.6lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**500 pcs with BL1830B** **300ml silicon sealant**

Cordless Inflator
Inflator Tanpa Kord 充電式打氣機



DMP181	Light Truck	Car	Tractor	Bicycle	Road Bike	Ball	Beach ball / Swim ring
Valve Shape							
Adapter	American			British	French	For Balls	For Swim rings/ Beach balls
Objects Conditions	Size: 205/70R16 0→600kPa High speed mode	Size: 215/60R16 0→250kPa High speed mode	Size: 7-14 0→180kPa High speed mode	Size: 26 inch 0→300kPa Low speed mode	Size: 700x23C 0→700kPa High speed mode	Size: 700x23C 0→90kPa Ball mode	Size: 30cm High speed mode
Work Speed (approx)	9 min 40 sec	3 min 30 sec	1 min 50 sec	9 sec	18 sec	39 sec	25 sec
Work Amount Battery BL1860B	3 times	14 times	25 times	500 times	110 times	230 times	120 times

DMP181Z
RM 1,032

Cordless Inflator
Inflator Tanpa Kord
充电式打气机





- **Ideal for inflating tires of cars and bicycles, sport balls, and more**

Standard Equipment:
British Adapter, French Adapter, Ball Adapter, Swim Ring Adapter

- Z: Without Charger & Battery

XPT

Max Air Pressure Udara Tekanan Maksimum 最大气压	**1,110kPa (161 PSI) [11.1 bar]**
Air Discharge Amount Pelepasan Udara 空气排放量	**200kPa: 22L/min | 700kPa: 11L/min**
Hose Length Panjang Hos 软管长度	**65cm (25-1/2")**
Dimensions (L x W x H) Dimensi 体积	**316x108x231mm (12-1/2x4-1/4x9-1/8")**
Net Weight Berat Bersih 淨重	**2.5 - 2.8kg (5.5 - 6.2lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**14 times with BL1860B** **(16" Car Tires 215/60R16)**

DMP180Z
RM 585

Cordless Inflator
Inflator Tanpa Kord
充电式打气机





- **Inflates the Tires of Cars, Bikes, Sport Balls, etc**

Standard Equipment: British Adapter, French Adapter, Ball Adapter, Swim Ring Adapter

- Z: Without Charger & Battery

DMP180 VIDEO CLIP Models and specs may vary by country

Max Air Pressure Udara Tekanan Maksimum 最大气压	**830kPa (121 PSI) [8.3 bar]**
Air Discharge Amount Pelepasan Udara 空气排放量	**200kPa: 12L/min | 700kPa: 8L/min | 830kPa: 7L/min**
Hose Length Panjang Hos 软管长度	**65cm (25-1/2")**
Dimensions (L x W x H) Dimensi 体积	**246x80x174mm (9-11/16"x3-1/8"x6-7/8")**
Net Weight Berat Bersih 淨重	**1.4 - 1.7kg (3.1 - 3.8lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**9 tires with BL1850B** **(16" Car Tires 215/60R16)**


***All list price shown are for reference only (exclude SST).**
*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DUR192LST | DUR192LZ

RM 1,617 | RM 813

Cordless Grass Trimmer
Pemotong Rumput Tanpa Kord
充电式割草机





- **Cost competitive model with increased output power**

Standard Equipment: Nylon Cutting Head, Safety Goggles (195246-2), Band Assembly, Hex Wrench

- LST: 1x Standard Charger, 1x 5.0Ah Battery
- LZ: Without Charger & Battery

BL MOTOR XPT

Max Output Keluaran Maksima 最大输出	460W
Cutting Width Lebar Keratan 切割宽度	Nylon Cutting Head: 300mm (11-3/4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	High: 0 - 4,500 | Low: 0 - 6,000
Spindle Size Saiz Spinde 主轴尺寸	M10 x 1.25LH
Dimensions (L x W x H) Dimensi 体积	1,836x345x236mm (72-1/4x13-5/8x9-1/4")
Net Weight Berat Bersih 淨重	3.2 - 3.5kg (7.1 - 7.7lbs.)
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	High: 18 min | Low: 34 min with BL1850B 300mm (11-3/4") Nylon Cutting Head

DUR191LRT2 | DUR191LZX2

RM 2,553 | RM 1,267

Cordless Grass Trimmer
Pemotong Rumput Tanpa Kord
充电式割草机





- **Lightweight and powerful cutting performance**

Standard Equipment: Plastic Blade Set (198384-9), Safety Goggles (195246-2), Band Assembly, Accessory Bag, Hex Wrench

- LRT2: 1x Rapid Charger, 2x 5.0Ah Battery
- LZX2: Without Charger & Battery

BL MOTOR XPT ADT AFT

Max Output Keluaran Maksima 最大输出	240W
Cutting Width Lebar Keratan 切割宽度	Nylon Cutting Head: 300mm (11-3/4") Metal Blade: 230mm (9") Plastic Blade: 255mm (10")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	3,500 - 6,000
Spindle Size Saiz Spinde 主轴尺寸	M10 x 1.25LH
Dimensions (L x W x H) Dimensi 体积	1,836x345x236mm (72-1/4x13-5/8x9-1/4")
Net Weight Berat Bersih 淨重	3.2 - 3.5kg (7.1 - 7.7lbs.)
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	Low: 74 min with BL1860B Plastic blade with load

DUR190LRT2 | DUR190LZX2

RM 2,370 | RM 1,085

Cordless Grass Trimmer
Pemotong Rumput Tanpa Kord
充电式割草机





- **Lightweight and powerful cutting performance**

Standard Equipment: Plastic Blade Set (198384-9), Safety Goggles (195246-2), Band Assembly (125516-5), Accessory Bag, Hex Wrench

- LRT2: 1x Rapid Charger, 2x 5.0Ah Battery
- LZX2: Without Charger & Battery

BL MOTOR XPT ADT AFT

Max Output Keluaran Maksima 最大输出	240W
Cutting Width Lebar Keratan 切割宽度	Nylon Cutting Head: 300mm (11-3/4") Metal Blade: 230mm (9") Plastic Blade: 255mm (10")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	3,500 - 6,000
Spindle Size Saiz Spinde 主轴尺寸	M10 x 1.25LH
Dimensions (L x W x H) Dimensi 体积	1,836x348x236mm (72-1/4"x13-3/4"x9-1/4")
Net Weight Berat Bersih 淨重	2.9 - 3.2kg (6.4 - 7.1lbs.)
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	Low: 74 min with BL1860B Plastic blade with load *Depends on the density of weeds

DUR189Z

RM 1,127

Cordless Grass Trimmer
Pemotong Rumput Tanpa Kord
充电式割草機



- **Comfortable short telescopic pipe provides easy handling in tight spaces**

Standard Equipment: Band Assembly, Accessory Bag, Nylon Cutting Head (198972-2), Hex Wrench

- Z: Without Charger & Battery

BL MOTOR XPT ADT

Max Output Keluaran Maksima 最大输出	240W
Cutting Width Lebar Keratan 切割宽度	Trimmer Head: 300mm (11-3/4") Plastic Blade: 255mm (10")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	High: 6,000 | Med: 5,000 | Low: 4,000 | ADT: 4,000 - 6,000
Spindle Size Saiz Spinde 主轴尺寸	M8 x 1.25RH
Dimensions (L x W x H) Dimensi 体积	1,518-1,618x258x369mm (59-3/4" - 63-3/4"x10-1/8"x14-1/2")
Net Weight Berat Bersih 淨重	3.1 - 3.4kg (6.8 - 7.5lbs.)
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	Low: 124 min | Med: 54 min | High: 46 min with BL1860B Nylon cutting head with load *Depends on the density of weeds

DUR188LRFE | DUR188LZ

RM 2,282 | RM 1,305

Cordless Grass Trimmer
Pemotong Rumput Tanpa Kord
充电式割草機

Split shaft
for easily carried & store in car boot
Batang berasingan mudah dimasukkan dalam kereta
可拆分的把手
方便放入车箱



- **Plastic triple blade for heavy duty operation**

Standard Equipment: Band Assembly, Nylon Cutting Head, Accessory Bag, Hex Wrench

- LRFE: 1x Rapid Charger, 2x 3.0Ah Battery
- LZ: Without Charger & Battery

BL MOTOR XPT ADT

DUR187/188 VIDEO CLIP Models and specs may vary by country

Max Output Keluaran Maksima 最大输出	240W
Cutting Width Lebar Keratan 切割宽度	Nylon Cutting Head: 300mm (11-3/4") Plastic Blade: 255mm (10")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	High: 6,000 | Med: 5,000 | Low: 4,000 | ADT: 4,000 - 6,000
Spindle Size Saiz Spindel 主轴尺寸	M8 x 1.25 LH
Dimensions (L x W x H) Dimensi 体积	1,791x258x232mm (70-1/2"x10-1/8"x9-1/8")
Net Weight Berat Bersih 淨重	3.7 - 4.0kg (8.1 - 8.8lbs)
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	Low: 124 min | Med: 54 min | High: 46 min with BL1860B Nylon cutting head with load

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DUR188URFE
RM 2,275

Cordless Grass Trimmer
Pemotong Rumput Tanpa Kord
充电式割草機



- **Plastic triple blade for heavy duty operation**

Standard Equipment: Band Assembly, Nylon Cutting Head, Accessory Bag, Hex Wrench

- URFE : 1 x Rapid Charger, 2 x 3.0Ah Battery

BL MOTOR XPT ADT

Max Output Keluaran Maksima 最大输出	**240W**
Cutting Width Lebar Keratan 切割宽度	**Nylon Cutting Head: 300mm (11-3/4") Plastic Blade: 255mm (10")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 6,000 | Med: 5,000 | Low: 4,000 | ADT: 4,000 - 6,000**
Spindle Size Saiz Spinde 主轴尺寸	**M8 x 1.25LH**
Dimensions (L x W x H) Dimensi 体积	**1,791x600x472mm (70-1/2"x23-5/8"x18-5/8")**
Net Weight Berat Bersih 淨重	**3.5 - 3.8kg (7.7 - 8.3lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 124 min | Med: 54 min | High: 46 min with BL1860B Nylon cutting head with load**

DUR187LRFE | DUR187LZ
RM 2,052 | RM 1,075

Cordless Grass Trimmer
Pemotong Rumput Tanpa Kord
充电式割草機





- **4 Mode rotation selection: 3 stages + ADT mode**

Standard Equipment: Band Assembly, Nylon Cutting Head, Accessory Bag, Hex Wrench

- LRFE: 1x Rapid Charger, 2x 3.0Ah Battery
- LZ: Without Charger & Battery


BL MOTOR XPT ADT

DUR187/188 VIDEO CLIP Models and specs may vary by country

Max Output Keluaran Maksima 最大输出	**240W**
Cutting Width Lebar Keratan 切割宽度	**Nylon Cutting Head: 300mm (11-3/4") Plastic Blade: 255mm (10")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 6,000 | Med: 5,000 | Low: 4,000 | ADT: 4,000 - 6,000**
Spindle Size Saiz Spinde 主轴尺寸	**M8 x 1.25LH**
Dimensions (L x W x H) Dimensi 体积	**1,791x258x232mm (70-1/2"x10-1/8"x9-1/8")**
Net Weight Berat Bersih 淨重	**3.4 - 3.7kg (7.5 - 8.2lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 124 min | Med: 54 min | High: 46 min with BL1860B Nylon cutting head with load**

DUR184LZ
RM 1,400

Cordless Grass Trimmer
Pemotong Rumput Tanpa Kord
充电式割草機





- **Low noise level for improved user comfort**

Standard Equipment: Safety Goggles, Band Assembly, Nylon Cutting Head, Accessory Bag, Hex Wrench

- LZ : Without Charger & Battery

BL MOTOR XPT

Max Output Keluaran Maksima 最大输出	**250W**
Cutting Width Lebar Keratan 切割宽度	**Trimmer Head: 300mm (11-3/4")**
Spindle Size Saiz Spinde 主轴尺寸	**M8 x 1.25RH**
Max Output Keluaran Maksima 最大输出	**250W**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 6,000 | Low: 5,000**
Dimensions (L x W x H) Dimensi 体积	**1,534-1,634x258x417mm (60-1/2" - 64-1/2"x10-1/8"x16-3/8")**
Net Weight Berat Bersih 淨重	**3.1 - 3.4kg (6.8 - 7.5lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**80 min with BL1850B**

DUR182LRF | DUR182LZ
RM 2,203 | RM 1,548

Cordless Grass Trimmer
Pemotong Rumput Tanpa Kord
充电式割草機





- **BL motor for faster cutting**

Standard Equipment: Safety Goggles, Band Assembly, Nylon Cutting Head, Accessory Bag, Hex Wrench

- LRF : 1x Rapid Charger, 1x 3.0Ah Battery
- LZ : Without Charger & Battery

BL MOTOR XPT

Max Output Keluaran Maksima 最大输出	**250W**
Cutting Width Lebar Keratan 切割宽度	**Trimmer Head: 300mm (11-3/4") Metal Blade: 230mm (9")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,500 - 6,000**
Spindle Size Saiz Spinde 主轴尺寸	**M8 x 1.25 LH**
Dimensions (L x W x H) Dimensi 体积	**1,843x287x253mm (72-1/2"x11-1/4"x10")**
Net Weight Berat Bersih 淨重	**3.6kg (8.0lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**61 min with BL1830B Nylon cutting head with load**

DUR181Z
RM 632

Cordless String Trimmer
Pemotong Rumput Tanpa Kord
充电式割草机





- **Lightweight for reduced operator fatigue**

Standard Equipment: Safety Goggles, Band Assembly, Nylon Cutting Head, Nylon Cord

- Z : Without Charger & Battery

Max Output Keluaran Maksima 最大输出	**230W**
Cutting Width Lebar Keratan 切割宽度	**Trimmer Head: 260mm (10-1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**7,800**
Dimensions (L x W x H) Dimensi 体积	**1,229 - 1,433x267x186 - 257mm (48-1/2 - 56-1/2"x10-1/2"x7-3/8 - 10-1/8")**
Net Weight Berat Bersih 淨重	**2.8 - 3.1kg (6.2 - 6.9lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**45 min with BL1830B Nylon cutting head with load**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DUX18RGX4 | DUX18Z

RM 2,460 | RM 1,040

Cordless Multi Function Power Head

Powerhead Pelbagai Fungsi Tanpa Kord
充电式多功能动力机



*Not compatible with 2.0Ah, 1.5Ah batteries



- **Split system of Power head and Attachment provides easier portability**

Standard Equipment: Shoulder Harness, Hex Wrench, Safety Goggles (195246-2), Accessory Bag

- RGX4: 1x Rapid Charger, 1x 6.0Ah Battery, 1x Tool Bag
  1x Brushcutter Attachment EM408MP, 1x Nylon Cutting Head
- Z: Without Charger & Battery

BL MOTOR XPT AFT

Max Output Keluaran Maksima 最大输出	470W
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	High: 0 - 9,700 | Low: 0 - 6,800
Dimensions (L x W x H) Dimensi 体积	983x318x175mm (38-3/4x12-1/2x6-7/8")
Net Weight Berat Bersih 淨重	2.8 - 3.1kg (6.2 - 6.8lbs.)

DLM330SM | DLM330Z

RM 2,062 | RM 1,293

Cordless Lawn Mower

Mesin Pemotong Rumput Tanpa Kord
充电式手推割草机





- **3 in 1 (Cutting / Collecting / Mulching)**
- **Optimal for use in home garden where the ability to turn in a small radius is required**

Standard Equipment: Blade, Mulching Plug, Wrench

- SM: 1x Standard Charger, 1x 4.0Ah Battery
- Z: Without Charger & Battery

XPT

Max Output Keluaran Maksima 最大输出	450W
Cutting Width Lebar Keratan 切割宽度	330mm (13")
Cutting Height Ketinggian Pemotongan 切割高度	20 - 75mm (13/16 - 2-15/16")
Grass Box Capacity Kapasiti Kotak Rumput 草箱容量	30L
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	4,300
Dimensions (L x W x H) Dimensi 体积	1,285-1,350x375x935-975mm (50-1/2-53x14-3/4x36-3/4-38-3/8")
Net Weight Berat Bersih 淨重	11.6 - 12.5kg (25.6 - 27.6lbs.)
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	Mowing Area 270m² or 14 min with BL1840B

DLM160Z

RM 1,057

Cordless Hand Push Lawn Trimmer

Mesin Pemotong Rumput Tanpa Kord
充电式手推草坪修剪机



- **World's First Cordless Hand Push Lawn Trimmer**

Standard Equipment: Rotary Blade, Fixed Blade, Lock Nut Wrench

- Z: Without Charger & Battery

XPT


Cutting Width Lebar Keratan 切割宽度	160mm (6-5/16")
Cutting Height Ketinggian Pemotongan 切割高度	10 / 15 / 20 / 25 / 30 / 35 / 40mm
Grass box capacity Kapasiti Kotak Rumput 草箱容量	8.4L
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	1,600
Wheel Size Saiz Roda 轮片尺寸	Front / Rear: 230mm (9")
Dimensions (L x W x H) Dimensi 体积	346×178×751-1,046mm
Net Weight Berat Bersih 淨重	5.8kg
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	Mowing Area 190m² or 39 min with BL1860B

DUH754SRT | DUH754SZ 750mm (29-1/2")

RM 3,828 | RM 3,017

Cordless Hedge Trimmer

Pemangkas Tanaman Pagar Tanpa Kord
充电式篱笆树剪





- **Excellent balance of high power and lightweight**

Standard Equipment: Blade Cover, Chip Receiver, Safety Goggles

- SRT: 1x Rapid Charger, 1x 5.0Ah Battery
- SZ: Without Charger & Battery

BL MOTOR XPT


Blade Length Panjang bilah 刀片长度	750mm (29-1/2")
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	High: 4,400 | Med: 3,600 | Low: 2,000
Tooth Spacing Selang Gigi 牙齿间隔	35mm (1-3/8")
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	23.5mm (15/16")
Dimensions (L x W x H) Dimensi 体积	1,200x282x143mm (47-1/4"x11-1/8"x5-5/8")
Net Weight Berat Bersih 淨重	3.4 - 3.9kg (7.5 - 8.6lbs.)
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	Low: 190 min | Med: 80 min | High: 65 min with BL1860B

DUH601Z 600mm (23-5/8")

RM 1,905

Cordless Hedge Trimmer

Pemangkas Tanaman Pagar Tanpa Kord
充电式篱笆树剪





- **5-Position rotating rear handle for increased comfort during vertical and angle trimming**

Standard Equipment: Blade Cover, Safety Goggles

- Z: Without Charger & Battery

BL MOTOR XPT

DUH601 VIDEO CLIP Models and specs may vary by country

Blade Length Panjang bilah 刀片长度	600mm (23-5/8")
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	High: 0 - 4,400 | Med: 0 - 3,600 | Low: 0 - 2,000
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	23.5mm (15/16")
Tooth Spacing Selang Gigi 牙齿间隔	35mm (1 - 3/8")
Dimensions (L x W x H) Dimensi 体积	1,121x192x225mm (44-1/8"x7-1/2"x8-7/8")
Net Weight Berat Bersih 淨重	3.8 - 4.5kg (8.4 - 9.8lbs.)
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	Low: 200 min | High: 55 min with BL1860B

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DUH523RME | DUH523RFE | DUH523Z 520mm (20-1/2")

RM 1,883 | RM 1,718 | RM 745

Cordless Hedge Trimmer
Pemangkas Tanaman Pagar Tanpa Kord
充电式篱笆树剪





- **Delivers 2,700 SPM for increased cutting speed**

Standard Equipment: Blade Cover (452685-2)

- RME: 1x Rapid Charger, 2x 4.0Ah Battery
- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger & Battery

Blade Length Panjang bilah 刀片长度	**520mm (20-1/2")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**2,700**
Tooth Spacing Selang Gigi 牙齿间隔	**15mm (9/16")**
Dimensions (L x W x H) Dimensi 体积	**938x195x193mm (37"x7-5/8"x7-5/8")**
Max Output Keluaran Maksima 最大输出	**210W**
Net Weight Berat Bersih 淨重	**3.0 - 3.4kg (6.7 - 7.5lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**130 min with BL1850B**

DUN600LZ 600mm (23-5/8")

RM 2,553

Cordless Hedge Trimmer
Pemangkas Tanaman Pagar Tanpa Kord
充电式篱笆树剪



DUN600L VIDEO CLIP Models and specs may vary by country



- **Lightweight for reduced operator fatigue**

Standard Equipment: Blade Cover, Hex Wrench

- LZ: Without Charger & Battery

Blade Length Panjang Bilah 刀片长度	**600mm (23-5/8")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**High: 4,400 | Med: 3,600 | Low: 2,000**
Tooth Spacing Selang Gigi 牙齿间隔	**35mm (1-3/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**23.5mm (15/16")**
Dimensions (L x W x H) Dimensi 体积	**2,050x230x178mm (80-1/2"x9"x7")**
Net Weight Berat Bersih 淨重	**3.7 - 4.1kg (8.2 - 9.0lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 180 min | Med: 80 min | High: 55 min with BL1860B**


DUN500WZ 500mm (19-3/4")

RM 2,735

Cordless Hedge Trimmer
Pemangkas Tanaman Pagar Tanpa Kord
充电式篱笆树剪



DUN500W VIDEO CLIP Models and specs may vary by country

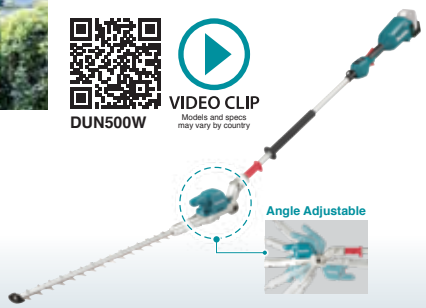

- **Lightweight for reduced operator fatigue**

Standard Equipment: Blade Cover, Band Assembly


- WZ: Without Charger & Battery

Blade Length Panjang Bilah 刀片长度	**500mm (19-3/4")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**High: 4,400 | Med: 3,600 | Low: 2,000**
Tooth Spacing Selang Gigi 牙齿间隔	**35mm (1-3/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**23.5mm (15/16")**
Dimensions (L x W x H) Dimensi 体积	**2,115x97x137mm (83-1/4"x3-13/16"x5-3/8")**
Net Weight Berat Bersih 淨重	**3.9 - 4.3kg (8.6 - 9.5lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 190 min | Med: 90 min | High: 60 min with BL1860B**

DUN461WZ 460mm (18-1/8")

RM 948

Cordless Pole Hedge Trimmer
Pemangkas Tanaman Pagar Tinggi Tanpa Kord
充电式高枝篱笆树剪





- **Trim tall hedges or prune the twigs or thin branches of tall trees without using stepladder**

Standard Equipment: Blade Cover

- WZ: Without Charger & Battery

Blade Length Panjang Bilah 刀片长度	**460mm (18-1/8")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**3,600**
Tooth Spacing Selang Gigi 牙齿间隔	**28mm (1-1/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**18mm (11/16")**
Dimensions (L x W x H) Dimensi 体积	**1,889-2,511x87x134mm (74-1/2-99x3-7/16x5-1/4")**
Net Weight Berat Bersih 淨重	**3.0 - 3.3kg (6.6 - 7.3lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**122 min with BL1850B**

DUM604Z 160mm (6-5/16")

RM 632

Cordless Grass Shear
Pemotong Rumput Tanpa Kord
充电式割草机



2in1



- **2 in 1: trimmer and shear blade can be attached**

Standard Equipment: Grass Receiver, Blade Cover

- Z: Without Charger & Battery

Cutting Width Lebar Keratan 切割宽度	**160mm (6-5/16")**
Depth Adjustment Pelarasan Kedalaman 深度调整	**15mm (9/16") | 20mm (13/16") | 25mm (1")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**2,500**
Dimensions (L x W x H) Dimensi 体积	**337x177x131mm (13-1/4"x7"x5-1/8")**
Net Weight Berat Bersih 淨重	**1.4 - 1.8kg (3.2 - 4.0 lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**200 min with BL1850B** **250 min with BL1860B**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DUM168Z 160mm (6-5/16")
RM 638

Cordless Grass Shear
Pemotong Rumput Tanpa Kord
充电式割草机



2 in 1



Sementara stok masih ada 售完即止
WHILE STOCK LAST

- **2 in 1: trimmer and shear blade can be attached**

Standard Equipment: Base Frame, Blade Cover

- Z: Without Charger & Battery

Cutting Width Lebar Keratan 切割宽度	**160mm (6-5/16")**
Depth Adjustment Pelarasan Kedalaman 深度调整	**10mm (3/8") | 20mm (13/16") | 30mm (1 - 3/16")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**2,500**
Dimensions (L x W x H) Dimensi 体积	**353x176x130mm (13-7/8"x6-15/16"x5-1/8")**
Net Weight Berat Bersih 净重	**1.4kg (3.0lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**220 min with BL1850B**

DUM111SYX 110mm (4-5/16")
RM 870

Cordless Grass Shear
Pemotong Rumput Tanpa Kord
充电式割草机



2 in 1



- **2 in 1: Both trimmer blade and shear blade can be attached**

Standard Equipment:
Grass Shear Blade 110mm (191N23-4),
Grass Shear Blade 110mm Cover (413885-9),
Hedge Trimmer Blade 200mm (198408-1),
Blade Cover Set (195274-7), Oil Vessel
(to include hedge trimmer part)

- SYX: 1x Standard Charger, 1x 1.5Ah Battery

Come with



Hedge Trimmer Blade (198408-1)

Cutting Width Lebar Keratan 切割宽度	**Grass Shear Blade: 110mm (4-5/16")** **Hedge Trimmer Blade: 200mm (7-7/8")**
Depth Adjustment Pelarasan Kedalaman 深度调整	**15mm (9/16") | 20mm (13/16") | 25mm (1")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**2,500**
Dimensions (L x W x H) Dimensi 体积	**330x120x130mm (13x4-3/4x5-1/8")**
Net Weight Berat Bersih 净重	**1.4 - 1.8kg (3.1 - 4.0lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**220 min with BL1850B**

DUC254Z 250mm (10")
RM 1,698

Cordless Chain Saw
Gergaji Rantai Tanpa Kord
充电式链锯





- **High Cutting Performance, Ultra Lightweight Top Handle Chain Saw**

Standard Equipment: Saw Chain (199075-5),
Guide Bar (161846-0), Guide Bar Cover (458501-6/ 452093-7)

- Z: Without Charger & Battery

Guide Bar Length Panjang Bar Panduan 导板长度	**250mm (10")**
Chain Pitch Kerapatan Rantai 链条齿距	**9.5mm (3/8")**
Chain Gauge Ketebalan Rantai 链条厚度	**1.1 (0.043") or 1.3mm (0.050")**
Chain Speed Kelajuan Rantai 链条速度	**0 - 24m/s (0 - 1,440m/min) (0 - 4,720FPM)**
Chain Oil Tank Volume Tangki Minyak Pelincir 链油箱	**140mL (4.8US oz)**
Dimensions (L x W x H) Dimensi 体积	**256x185x190mm (10-1/8"x7-1/2"x7-1/4")**
Net Weight Keberatan 净重	**2.8 - 3.3kg (6.3 - 7.3lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**160 cuts with BL1850B 50 mm Cedar timber**

DUC122Z 115mm (4-1/2")
RM 1,532

430 mm

Cordless Chain Saw
Gergaji Rantai Tanpa Kord
充电式链锯





Sementara stok masih ada 售完即止
WHILE STOCK LAST

- **Low noise & zero emissions for operator comfort**

Standard Equipment: Saw Chain (791284-8),
Guide Bar (158476-6), Guide Bar Cover (416311-7), Chain Oil, File

- Z: Without Charger & Battery

Guide Bar Length Panjang Bar Panduan 导板长度	**115mm (4-1/2")**
Chain Pitch Kerapatan Rantai 链条齿距	**6.35mm (1/4")**
Chain Gauge Ketebalan Rantai 链条厚度	**1.3mm (0.05")**
Chain Speed Kelajuan Rantai 链条速度	**5.0m/s (300m/min) (980FPM)**
Chain Oil Tank Volume Tangki Minyak Pelincir 链油箱	**80mL (2.7US oz)**
Dimensions (L x W x H) Dimensi 体积	**422x195x215mm (16-5/8"x7-5/8"x8-1/2")**
Net Weight Keberatan 净重	**2.6kg (5.7lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**320 cuts BL1850B 50 mm Timber**

DUB184RT | DUB184Z
RM 2,005 | RM 1,193

Cordless Blower
Mesin Penghembus Angin
Tanpa Kord
充电式吹风机





- **Compact and lightweight for single handed operation**

Standard Equipment: Nozzle, Hex Wrench

- RT: 1x Rapid Charger, 1x 5.0Ah Battery
- Z: Without Charger & Battery

Max Air Volume Isipadu Angin Maksimum 最大风量	**13.0m³/min (459CFM)**
Max Air Velocity Velositi Angin Maksimum 最大风速	**52.1m/s (116MPH)**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 18,000**
Dimensions (L x W x H) Dimensi 体积	**825x160x285mm (32-1/2"x6-5/16"x11-1/4")**
Net Weight Berat Bersih 净重	**2.5 - 3.0kg (5.4 - 6.7lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**12 min with BL1860B**

VIDEO CLIP
Models and specs may vary by country
DUB184


***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DUB186Z
RM 500

Cordless Blower
Mesin Penghembus Angin Tanpa Kord
充电式吹风机





- **Compact and lightweight for single handed operation**

Standard Equipment: Garden Nozzle (191G09-6)

- Z: Without Charger & Battery

Max Air Volume Isipadu Angin Maksimum 最大风量	**3.2m³/min**
Max Air Velocity Velositi Angin Maksimum 最大风速	**68m/s**
Avg. Air Velocity Kelajuan Angin Purata 平均风速	**56m/s**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 18,000**
Dimensions (L x W x H) Dimensi 体积	**861x156x210mm (34x6-1/8x8-1/4")**
Net Weight Berat Bersih 净重	**1.6 - 2.1kg (3.5 - 4.6lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 130 min | Med: 50 min | High: 20 min with BL1850B**

DUB183Z
RM 500

Cordless Blower
Mesin Penghembus Angin Tanpa Kord
充电式吹风机





- **Long blowing nozzle with curved tip for optimal blowing performance**

Sementara stok masih ada 售完即止 WHILE STOCK LAST

Standard Equipment: Garden Nozzle

- Z: Without Charger & Battery

Air Volume Isipadu Angin 风量	**2.6m³/min**
Air Speed Kelajuan Angin 风速	**52m/s**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0-18,000**
Dimensions (L x W x H) Dimensi 体积	**845x155x212mm (33-1/4"x6-1/8"x8-3/8")**
Net Weight Berat Bersih 净重	**1.7kg (3.8lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 125 min | Med: 42 min | High: 18 min with BL1850B**

DUB185Z
RM 382

Cordless Blower
Mesin Penghembus Angin Tanpa Kord
充电式吹风机





- **Larger air volume has been obtained by increasing the air outlet diameter**


Standard Equipment: Nozzle

- Z: Without Charger & Battery

Max Air Volume Isipadu Angin Maksimum 最大风量	**3.2m³/min**
Max Air Velocity Velositi Angin Maksimum 最大风速	**98m/s**
Avg. Air Velocity Kelajuan Angin Purata 平均风速	**81m/s**
Max Sealed Suction Sedutan Terkedap 最大密封吸力	**5.8kPa**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 18,000**
Dimensions (L x W x H) Dimensi 体积	**517x156x210mm (20-3/8x6-1/8x8-1/4")**
Net Weight Berat Bersih 净重	**1.6 - 2.1kg (3.5 - 4.6lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 130 min | Med: 50 min | High: 21 min with BL1850B**

DUB182Z
RM 382

Cordless Blower
Mesin Peniup Tanpa Kord
充电式吹风机





- **Compact and ergonomic design at only 525mm (20-3/4") long**

Sementara stok masih ada 售完即止 WHILE STOCK LAST

Standard Equipment: Nozzle assembly

- Z: Without Charger & Battery

Air Volume Isipadu Angin 风量	**2.6m³/min**
Air Speed Kelajuan Angin 风速	**80m/s**
Air Pressure Udara Tekanan 气压	**5.4kPa (550mmH_2O)**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0-18,000**
Dimensions (L x W x H) Dimensi 体积	**525x155x212mm (20-3/4"x6-1/8"x8-3/8")**
Net Weight Berat Bersih 净重	**1.7kg (3.7lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 125 min | Med: 42 min | High: 20 min with BL1850B**

DVF154Z 15L
RM 3,008

Cordless Garden Sprayer
Penyembur Tanaman Tanpa Kord
充电式花园喷雾器





- **Reduced running cost with Li-ion battery**

Standard Equipment: Upright Double-Headed Nozzle, Wide-Angle Herbicide Nozzle, Spray Pipe Holder, Shoulder Harness

- Z: Without Charger & Battery

Max Pressure Tekanan Maksimum 最大水压	**0.3MPa (3 kgf/cm²)**
Chemical Tank Tangki Kimia 化学箱容量	**15L**
Dimensions (L x W x H) Dimensi 体积	**345x235x525mm (13-5/8"x9-1/4"x20-3/4")**
Net Weight Berat Bersih 净重	**4.1 - 4.4kg (9.1 - 9.7lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Wide Angle Nozzle 344 min Double Nozzle 215 min with BL1850B**


***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

DUS054Z 5L
RM 908

Cordless Garden Sprayer
Penyembur Tanaman Tanpa Kord
充电式花园喷雾器



- 2-mode selectable (Mist and Stream modes)

Standard Equipment:
H-Shaped Double Head Nozzle, Spray Wand, Spray Wand Holder, Shoulder Belt

- Z: Without Charger & Battery

XPT EXTREME PROTECTION TECHNOLOGY

DUS054 US053D

VIDEO CLIP
Models and specs may vary by country



NEW BARU 新

Max Pressure Tekanan Maksimum 最大水压	0.3Mpa (3 kgf/cm²)
Chemical Tank Tangki Kimia 化学箱容量	5L
Hose Length Panjang Hos 软管长度	1.7m
Spray Wand Length Panjang Batang Semburan 喷雾棒长度	0.5 - 0.7m
Nozzle Mounting Thread Benang Pemasangan Muncung 喷嘴安装螺纹	G 1/4
Dimensions (L x W x H) Dimensi 体积	343x182x368mm (13-1/2x7-1/8x14-1/2")
Net Weight Berat Bersih 淨重	3.2 - 3.5kg (7.1 - 7.7lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	170L (double outlet mist) 110L (single outlet mist) 205L (double outlet stream) 140L (single outlet stream) with BL1830B

Battery Powered Wheelbarrow

Kereta Sorong Berkuasa Bateri 充电式搬运车

BL MOTOR
Motor tanpa berus
无碳刷马达

XPT EXTREME PROTECTION TECHNOLOGY
Teknologi Perlindungan Ekstrim
防尘防水滴技术



8 units of metal string holder
8 unit pemegang tali logam
8个金属螺栓线架

Adjustable size (tool-less)
Saiz boleh dilaras tanpa menggunakan alat
尺寸可调整（免使用工具）

Longest running distance
Jarak perjalanan terpanjang
最长行走距离
6km
*When using BL1850B x2
*Semasa menggunakan BL1850B x2
*当使用 BL1850B x2

Maximum weight capacity
Kapasiti berat maksimum
最重载量
130kg



Flatbed Pipe Frame type
Jenis rak 货架型

Perfect for moving heavy loads in carton, basket and sack.
Sempurna untuk menggerakkan barang dalam kotak, bakul dan guni. 适用于装载纸箱，篮子和袋装物体。

Bucket type
Jenis baldi 货斗型

Ideal for carrying loose material, such as sand, soil, gravel and more.
Sesuai untuk membawa bahan seperti pasir, tanah, batu kerikil dan banyak lagi. 适用于装载松散物料，如沙土和碎石等。



2-speed control
Kawalan 2 kelajuan
2 速度控制



Brake level with locking mechanism
Tuas brek dengan sistem berkunci
煞车锁定系统



Pedal rear wheel braking syste
Pedal brek roda belakang
后轮煞车踏板



Dual LED job lights
Dua Lampu LED
两颗 LED 灯



Detachable rear wheel
Roda belakang boleh ditanggalkan
可拆卸泥地行走一轮脚架



Washable with tap water
Boleh dibasuh dengan air paip
自来水清洗







Able to climb a slope gradient of
Pergerakan atas kecerunan maksimum
最大爬坡能力
12°

12°

* Performance may vary depending on weight of load and slope of terrain
Prestasi mungkin berbeza bergantung kepada berat barang dan kecerunan tanah 搬运车性能可能因装载量和地形坡度而異

DCU180Z Bucket Set / Carier Set
RM 5,855

Battery Powered Wheelbarrow
Kereta Sorong Berkuasa Bateri
充电式搬运车



- Ideal for use at urban construction sites and on farms

Standard Equipment:
Lock Key, Support Legs, Wrenches

- Z: Without Charger & Battery

DCU180

VIDEO CLIP
Models and specs may vary by country



not included



Carrier set Jenis rak 货架型
Part No. 199116-7

or

not included



Bucket set Jenis baldi 货斗型
Part No. 198494-2

Max Load Capacity Kapasiti Berat Maksimum 最重载量	130kg (290lbs.)
Traveling Speed Kelajuan Perjalanan 行驶速度	Forward High: 0 - 3.5km/h | Forward Low: 0 - 1.5km/h | Reverse: 0 - 1 km/h
Max Climbing Capacity Pergerakan atas Kecerunan Maksimum 最大爬坡能力	12°
Dimensions (L x W x H) Dimensi 体积	When carrier is installed/ During operation: 1,315x1,060x900mm (51-3/4"x41-3/4"x35-1/2") When carrier is installed/ When stored: 1,110x820x820mm (43-3/4"x32-1/4"x32-1/4") When bucket is installed/ During operation: 1,310x820x900 mm (51-1/2"x32-1/4"x35-1/2") When bucket is installed/ When stored: 1,110x820x820mm (43-3/4"x32-1/4"x32-1/4")
Net Weight Keberatan 净重	39.3 - 44.8kg (86.5 - 98.7lbs)
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	120 min with BL1860B x2

***All list price shown are for reference only (exclude SST).**
*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

12Vmax CXT® Li-ion Ah 4.0 2.0 1.5

DF332DSME | DF332DSAE | DF332DZ 10mm (3/8")

RM 1,510 | RM 1,328 | RM 680

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻





- **BL motor with high power**

Standard Equipment: Phillips Bit, Belt Clip

- DSME: 1x Speed Charger, 2x 4.0Ah Battery
- DSAE: 1x Speed Charger, 2x 2.0Ah Battery
- DZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

BL MOTOR XPT

Capacity Kapasiti 能力	**Steel: 10 (3/8")** **Wood: 28mm (1-1/8")**
Chuck Capacity Kapasiti Chuck 夹头能力	**0.8 - 10mm (1/32 - 3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,500 | Low: 0 - 450**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**Hard: 35N·m (310in.lbs.)** **Soft: 21N·m (190in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**32N·m (280in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**154x66x217mm** **(6-1/16"x2-5/8"x8-1/2")**
Net Weight Berat Bersih 淨重	**1.0 - 1.2kg (2.3 - 2.6lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**460 holes with BL1021B** **Drilling ø9mm Auger Bit,** **Melapi 30mm Thickness**

DF333DSME | DF333DWAE | DF333DWYE | DF333DZ 10mm (3/8")

RM 1,160 | RM 895 | RM 840 | RM 330

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻





- **Increased motor power for higher speed and max tightening torque**

Standard Equipment: Phillips Bit, Belt Clip

- DSME: 1x Speed Charger, 2x 4.0Ah Battery
- DWAE: 1x Standard Charger, 2x 2.0Ah Battery
- DWYE: 1x Standard Charger, 2x 1.5Ah Battery
- DZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Capacity Kapasiti 能力	**Steel: 10mm (3/8")** **Wood: 21mm (13/16")**
Chuck Capacity Kapasiti Chuck 夹头能力	**0.8 - 10mm (1/32 - 3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,700 | Low: 0 - 450**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**Hard: 30N·m (270in.lbs.)** **Soft: 14N·m (130in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**28N·m (250in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**179x66x212mm** **(7"x2-5/8"x8-3/8")**
Net Weight Berat Bersih 淨重	**1.1 - 1.2kg (2.4 - 2.7lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**350 holes with BL1021B** **Drilling ø9mm Auger Bit,** **Melapi 30mm Thickness**

DF331DSME | DF331DZ 10mm (3/8")

RM 1,160 | RM 330

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻





- **Increased motor power for higher speed**

Standard Equipment: Phillips Bit, Belt Clip

- DSME: 1x Speed Charger, 2x 4.0Ah Battery
- DZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Capacity Kapasiti 能力	**Steel: 10mm (3/8")** **Wood: 21mm (13/16")**
Chuck Capacity Kapasiti Chuck 夹头能力	**0.8 - 10mm (1/32 - 3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,700 | Low: 0 - 450**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**Hard: 30N·m (270in.lbs.)** **Soft: 14N·m (130in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**28N·m (250in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**189x66x209mm** **(7-7/16"x2-5/8"x8-1/4")**
Net Weight Berat Bersih 淨重	**1.1 - 1.3kg (2.4 - 2.8lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**350 holes with BL1021B** **Drilling ø9mm Auger Bit,** **Melapi 30mm Thickness**

DF032DSME | DF032DSAE | DF032DZ 10mm (3/8")

RM 1,488 | RM 1,305 | RM 658

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻





- **BL motor with high power**

Standard Equipment: Phillips Bit, Belt Clip

- DSME: 1x Speed Charger, 2x 4.0Ah Battery
- DSAE: 1x Speed Charger, 2x 2.0Ah Battery
- DZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

BL MOTOR

Capacity Kapasiti 能力	**Steel: 10mm (3/8")** **Wood: 28mm (1-1/8")**
Chuck Capacity Kapasiti Chuck 夹头能力	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,500 | Low: 0 - 450**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**Hard: 35N·m (310in.lbs.)** **Soft: 21N·m (190in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**32N·m (280in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**124x66x217mm** **(4-7/8"x2-5/8"x8-1/2")**
Net Weight Berat Bersih 淨重	**0.88 - 1kg (1.9 - 2.3lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**200 holes with BL1021B** **Wood Drilling ø3x1.6mm**

DF033DSME | DF033DWAE | DF033DZ 10mm (3/8")

RM 1,127 | RM 862 | RM 298

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻





- **Increased motor power for higher speed and max tightening torque**

Standard Equipment: Phillips Bit, Belt Clip

- DSME: 1x Speed Charger, 2x 4.0Ah Battery
- DWAE: 1x Standard Charger, 2x 2.0Ah Battery
- DZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Capacity Kapasiti 能力	**Steel: 10mm (3/8")** **Wood: 21mm (13/16")**
Chuck Capacity Kapasiti Chuck 夹头能力	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,700 | Low: 0 - 450**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**Hard: 30N·m (270in.lbs.)** **Soft: 14N·m (130in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**28N·m (250in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**149x66x212mm** **(5-7/8"x2-5/8"x8-3/8")**
Net Weight Berat Bersih 淨重	**0.9 - 1.1kg (2.1 - 2.4lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**160 holes with BL1021B** **Wood Drilling ø3x1.6mm**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

12Vmax CXT® Li-ion Ah 4.0 2.0 1.5

DF031DSME | DF031DWAE | DF031DWYE | DF031DZ 10mm (3/8")

DF031DSME RM 1,127 | DF031DWAE RM 862 | DF031DWYE RM 807 | DF031DZ RM 298

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



- **Ideal for work in tight spaces**

Standard Equipment: Phillips Bit, Belt Clip

- DSME: 1x Speed Charger, 2x 4.0Ah Battery
- DWAE: 1x Standard Charger, 2x 2.0Ah Battery
- DWYE: 1x Standard Charger, 2x 1.5Ah Battery
- DZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model



DF031DSME Sementara stok masih ada 售完即止 WHILE STOCK LAST

Capacity Kapasiti 能力	Steel: 10mm (3/8") Wood: 21mm (13/16")
Hex Shank Batang Heksagon 六角柄	6.35mm (1/4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	High: 0 - 1,700 | Low: 0 - 450
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	Hard: 30N·m (270in.lbs.) Soft: 14N·m (130in.lbs.)
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	28N·m (250in.lbs.)
Dimensions (L x W x H) Dimensi 体积	157x66x209mm (6-3/16"x2-5/8"x8-1/4")
Net Weight Berat Bersih 淨重	0.94 - 1.1kg (2.1 - 2.5lbs)
Work Amount (approx.) Jumlah Kerja 工作量	160 holes with BL1021B Wood Drilling ø3x1.6mm

Model No. 型号	Capacity Kapasiti 能力		No Load Speed (rpm) Kelajuan Tanpa Beban 回转数	Mechanical Speed Mekanikal Kelajuan 机械速度	Torque Setting Tetapan Pemutaran 扭转设置	Max. Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	Overall Length (mm) Panjang Keseluruhan 总长度	Net Weight Berat Bersih 淨重	BL MOTOR	XPT
	Steel	Wood								
DF332D	10mm	28mm	0-1,500 / 0-450	2 Speed	20	Hard: 35 / Soft: 21	154	1.0kg (2.3lbs)	●	●
DF032D	10mm	28mm	0-1,500 / 0-450	2 Speed	20	Hard: 35 / Soft: 21	124	0.88kg (1.9lbs)	●	
DF333D	10mm	21mm	0-1,700 / 0-450	2 Speed	20	Hard: 30 / Soft: 14	179	1.1kg (2.4lbs)		
DF033D	10mm	21mm	0-1,700 / 0-450	2 Speed	20	Hard: 30 / Soft: 14	149	0.9kg (2.1lbs)		
DF331D	10mm	21mm	0-1,700 / 0-450	2 Speed	18	Hard: 30 / Soft: 14	189	1.1kg (2.4lbs)		
DF031D	10mm	21mm	0-1,700 / 0-450	2 Speed	18	Hard: 30 / Soft: 14	157	0.94kg (2.1lbs)		

HP332DSME | HP332DSAE | HP332DZ 10mm (3/8")

HP332DSME RM 1,577 | HP332DSAE RM 1,395 | HP332DZ RM 748

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



- **Fast hammer drilling in masonry materials**

Standard Equipment: Phillips Bit, Belt Clip

- DSME: 1x Speed Charger, 2x 4.0Ah Battery
- DSAE: 1x Speed Charger, 2x 2.0Ah Battery
- DZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

BL MOTOR XPT




Capacity Kapasiti 能力	Steel: 10mm (3/8") Wood: 28mm (1-1/8") Masonry: 8mm (5/16")
Chuck capacity Kapasiti Chuck 夹头能力	0.8 - 10mm (1/32 - 3/8")
Impacts Per Minute (IPM) Impak Per Minit 冲击数	High: 0 - 22,500 | Low: 0 - 6,750
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	High: 0 - 1,500 | Low: 0 - 450
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	Hard: 35N·m (310in.lbs.) Soft: 21N·m (190in.lbs.)
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	32N·m (280in.lbs.)
Dimensions (L x W x H) Dimensi 体积	168x66x217mm (6-5/8"x2-5/8"x8-1/2")
Net Weight Berat Bersih 淨重	1.1 - 1.3kg (2.4 - 2.8lbs)
Work Amount (approx.) Jumlah Kerja 工作量	460 holes with BL1021B Drilling ø9mm Auger Bit, Melapi 30mm Thickness

HP333DSME | HP333DWAE | HP333DWYE | HP333DWY | HP333DZ 10mm (3/8")

HP333DSME RM 1,235 | HP333DWAE RM 972 | HP333DWYE RM 917 | HP333DWY RM 745 | HP333DZ RM 407

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



- **Increased motor power for higher speed and max tightening torque**

Standard Equipment: Phillips Bit, Belt Clip

- DSME: 1x Speed Charger, 2x 4.0Ah Battery
- DWAE: 1x Standard Charger, 2x 2.0Ah Battery
- DWYE: 1x Standard Charger, 2x 1.5Ah Battery
- DWY: 1x Standard Charger, 1x 1.5Ah Battery
- DZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model



Capacity Kapasiti 能力	Steel: 10mm (3/8") Wood: 21mm (13/16") Masonry: 8mm (5/16")
Chuck Capacity Kapasiti Chuck 夹头能力	0.8 - 10mm (1/32 - 3/8")
Impacts Per Minute (IPM) Impak Per Minit 冲击数	High: 0 - 25,500 | Low: 0 - 6,750
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	High: 0 - 1,700 | Low: 0 - 450
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	Hard: 30N·m (270in.lbs.) Soft: 14N·m (130in.lbs.)
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	28N·m (250 in.lbs.)
Dimensions (L x W x H) Dimensi 体积	193x66x212mm (7-5/8"x2-5/8"x8-3/8")
Net Weight Berat Bersih 淨重	1.1 - 1.3kg (2.4 - 2.9lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	350 holes with BL1021B Drilling ø9mm Auger Bit, Melapi 30mm Thickness

HP331DSME | HP331DWAE | HP331DWYE 10mm (3/8")

HP331DSME RM 1,235 | HP331DWAE RM 972 | HP331DWYE RM 917

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



- **High speed mode for speedy drilling**

Standard Equipment: Phillips Bit, Belt Clip

- DSME: 1x Speed Charger, 2x 4.0Ah Battery
- DWAE: 1x Standard Charger, 2x 2.0Ah Battery
- DWYE: 1x Standard Charger, 2x 1.5Ah Battery

*Not applicable for Z model

HP331DWYE Sementara stok masih ada 售完即止 WHILE STOCK LAST



Capacity Kapasiti 能力	Steel: 10mm (3/8") Wood: 21mm (13/16") Masonry: 8mm (5/16")
Impacts Per Minute (IPM) Impak Per Minit 冲击数	High: 0 - 25,500 | Low: 0 - 6,750
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	High: 0 - 1,700 | Low: 0 - 450
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	Hard: 30N·m (270in.lbs.) Soft: 14N·m (130in.lbs.)
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	28N·m (250in.lbs.)
Dimensions (L x W x H) Dimensi 体积	201x66x209mm (7-7/8"x2-5/8"x8-1/4")
Net Weight Berat Bersih 淨重	1.1 - 1.3kg (2.5 - 2.9lbs)
Work Amount (approx.) Jumlah Kerja 工作量	350 holes with BL1021B Drilling ø9mm Auger Bit, Melapi 30mm Thickness

***All list price shown are for reference only (exclude SST).**


*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

12Vmax CXT® Li-ion Ah 4.0 2.0 1.5

TD111DSME | TD111DWAE | TD111DWYE | TD111DZ

RM 1,510 | RM 1,245 | RM 1,190 | RM 680

Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机





- **3-Mode operation: A-mode/ Hard mode/ Soft mode**

Standard Equipment: Phillips Bit, Belt Clip

- DSME: 1x Speed Charger, 2x 4.0Ah Battery
- DWAE: 1x Standard Charger, 2x 2.0Ah Battery
- DWYE: 1x Standard Charger, 2x 1.5Ah Battery
- DZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

BL MOTOR XPT

Capacity Kapasiti 能力	**Machine Screw: M4 - M8mm (5/32" - 5/16")** **Standard Bolt: M5 - M14 (3/16" - 9/16")** **High Tensile Bolt: M5 - M12 (3/16" - 1/2")** **Coarse thread (in length): 22 - 90mm (7/8" - 3-1/2")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Hard: 0 - 3,000 | Soft: 0 - 1,300**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Hard: 0 - 3,900 | Soft: 0 - 1,600**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**135N·m (1,200in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**135x66x210mm (5-5/16"x2-5/8"x8-1/4")**
Net Weight Berat Bersih 淨重	**0.97 - 1.1kg (2.1 - 2.5lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**340 pcs with BL1021B** **Coarse Thread Wood Screw 45mm (Melapi)**

TD110DSME | TD110DWAE | TD110DWYE | TD110DZ

RM 1,160 | RM 895 | RM 840 | RM 330

Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机





- **Compact and Lightweight**

Standard Equipment: Phillips Bit, Belt Clip

- DSME: 1x Speed Charger, 2x 4.0Ah Battery
- DWAE: 1x Standard Charger, 2x 2.0Ah Battery
- DWYE: 1x Standard Charger, 2x 1.5Ah Battery
- DZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Capacity Kapasiti 能力	**Machine Screw: M4 - M8mm (5/32" - 5/16")** **Standard Bolt: M5 - M12 (3/16" - 1/2")** **High Tensile Bolt: M5 - M10 (3/16" - 3/8")** **Coarse thread (in length): 22 - 90mm (7/8" - 3-1/2")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,600**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,500**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**110N·m (970in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**153x66x204mm (6"x2-5/8"x8-1/8")**
Net Weight Berat Bersih 淨重	**1.0 - 1.2kg (2.3 - 2.6lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**250 pcs with BL1021B** **Coarse Thread Wood Screw 45mm (Melapi)**

TW161DSME | TW161DWAE | TW161DZ 12.7mm (1/2")

RM 1,440 | RM 1,177 | RM 610

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手



- **Reverse Rotation Auto-Stop Mode stops in 0.2 seconds after loosened enough**

Standard Equipment: Belt Clip

- DSME: 1x Speed Charger, 2x 4.0Ah Battery
- DWAE: 1x Standard Charger, 2x 2.0Ah Battery
- DZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

BL MOTOR

Fastening Capacities Keupayaan Pengancing 紧固能力	**Standard Bolt: M8 - M16 (5/16" - 5/8")** **High Tensile Bolt: M6 - M12 (1/4" - 1/2")**
Square Drive Batang Segi Empat 四方头	**12.7mm (1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Hard: 0 - 2,400 | Soft: 0 - 1,300**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Hard: 0 - 3,600 | Soft: 0 - 2,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**165N·m (122ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**150x66x213mm (5-7/8"x2-5/8"x8-3/8")**
Net Weight Berat Bersih 淨重	**1.1 - 1.2kg (2.4 - 2.7lbs.)**

TW160DZ 9.5mm (3/8")

RM 610

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手





- **9.5mm (3/8") square drive fits most common automotive sockets**

Standard Equipment: Belt Clip

- DZ: Without Charger & Battery

BL MOTOR

Fastening Capacities Keupayaan Pengancing 紧固能力	**Standard Bolt: M8 - M16 (5/16" - 5/8")** **High Tensile Bolt: M6 - M12 (1/4" - 1/2")**
Square Drive Batang Segi Empat 四方头	**9.5mm (3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Hard: 0 - 2,400 | Soft: 0 - 1,300**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Hard: 0 - 3,600 | Soft: 0 - 2,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**160N·m (120ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**144x66x213mm (5-5/8"x2-5/8"x8-3/8")**
Net Weight Berat Bersih 淨重	**1.0 - 1.2kg (2.2 - 2.6lbs.)**

TW141DSME | TW141DWAE | TW141DZ 12.7mm (1/2")

RM 1,215 | RM 950 | RM 385

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手





- **Ultra compact design and lightweight**

Standard Equipment: Belt Clip

- DSME: 1x Speed Charger, 2x 4.0Ah Battery
- DWAE: 1x Standard Charger, 2x 2.0Ah Battery
- DZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Fastening Capacities Keupayaan Pengancing 紧固能力	**Standard Bolt: M8 - M16 (5/16" - 5/8")** **High Tensile Bolt: M6 - M12 (1/4" - 1/2")**
Square Drive Batang Segi Empat 四方头	**12.7mm (1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,600**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,200**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**145N·m (107ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**168x66x205mm (6-5/8"x2-5/8"x8-1/8")**
Net Weight Berat Bersih 淨重	**1.1 - 1.2kg (2.4 - 2.7lbs.)**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

12Vmax CXT® Li-ion Ah 4.0 2.0 1.5

TW140DZ 9.5mm (3/8")
RM 385

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手





- **9.5mm (3/8") square drive fits most common automotive sockets**

Standard Equipment: Belt Clip

- DZ: Without Charger & Battery

Fastening Capacities Keupayaan Pengancing 紧固能力	**Standard Bolt: M8 - M16 (5/16" - 5/8")** **High Tensile Bolt: M6 - M12 (1/4" - 1/2")**
Square Drive Batang Segi Empat 四方头	**9.5mm (3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,600**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,200**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**140N·m (1,240in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**161x66x205mm** **(6-3/8"x2-5/8"x8-1/8")**
Net Weight Berat Bersih 净重	**1 - 1.2kg (2.3 - 2.7lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**160 pcs with BL1021B** **High Tensile Bolt M12** **Standard Fastening Torque at 100N.m**

TW060DZ 6.35mm (1/4")
RM 385

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手



- **Electric brake for increased operator safety**

Standard Equipment: Belt Clip

- DZ: Without Charger & Battery


Fastening Capacities Keupayaan Pengancing 紧固能力	**Standard Bolt: M8 - M12 (5/16" - 15/32")** **High Tensile Bolt: M6 - M10 (1/4" - 3/8")**
Square Drive Batang Segi Empat 四方头	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,600**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,200**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**60N·m (530in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**161x66x205mm** **(6-3/8"x2-5/8"x8-1/8")**
Net Weight Berat Bersih 净重	**1.0 - 1.2kg (2.2 - 2.6lbs.)**

Cordless Ratchet Wrench
Perengkuh Ratchet Tanpa Kord 充电式棘轮扳手





Forward / Reverse rotation change
Turn the reversing lever to the A side for clockwise rotation or to the B side for counterclockwise rotation
Perubahan putaran maju / belakang
正转/反转变化



Compatible with variable sockets with socket adapter
Sesuai dengan soket yang berubah-ubah dengan penyesuai soket
与带有插座适配器的可变插座兼容



Accessories (Optional)
Aksesori 配件



Socket Adaptor 9.5mm (3/8")
Part No.191A50-3



Socket Adaptor 6.35mm (1/4")
Part No.191A51-1

Standard Equipment
Peralatan Standard
标准装备



Tool Bag (optional)
Part No. 832071-7

Able to tighten 13mm nut onto M8 threaded rod
Kipas swing automatik
自动摇



13mm nut only

WR100DWA RM1,605 | WR100DZ 9.5mm (3/8") RM 1,222

Cordless Ratchet Wrench
Perengkuh Ratchet Tanpa Kord
充电式棘轮扳手





- **Supplied with Two Socket Adapters for Compatibility with a Variety of Sockets**

Standard Equipment:
Socket Adapter 9.5mm & 6.35mm

- DWA: 1x Standard Charger, 1x 2.0Ah Battery, 1x Tool Bag
- DZ: Without Charger & Battery

XPT

Capacity Kapasiti 能力	**Standard Bolt: M5 - M12 (3/16" - 1/2")** **High Tensile Bolt: M5 - M10 (3/16" - 3/8")**
Square Drive Kepala Segi Empat 方形头	**9.5mm (3/8") | 6.35mm (1/4 ")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 800**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**47.5N·m (420in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**341x67x63mm** **(13-7/16"x2-5/8"x2-1/2")**
Net Weight Berat Bersih 净重	**1.0 - 1.2kg (2.3 - 2.7lbs.)**


***All list price shown are for reference only (exclude SST).**
*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

12Vmax CXT® Li-ion Ah 4.0 2.0 1.5

HR166DSMJ | HR166DWAJ | HR166DZ 16mm (5/8")

RM 1,787 | RM 1,523 | RM 957

Cordless Rotary Hammer
Tukul Putar Tanpa Kord
充电式电钻



2 modes



- **2-Mode operation for Rotation Only or Hammering with Rotation**

Standard Equipment: Side Grip, Depth Gauge

- DSMJ: 1x Speed Charger, 2x 4.0Ah Battery, 1x Makpac Connector Box
- DWAJ: 1x Standard Charger, 2x 2.0Ah Battery, 1x Makpac Connector Box
- DZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

BL MOTOR

Impact Energy Kekuatan Impak 单次最大锤击力	EPTA-Procedure 05/2009: 1.1J Our experimental conditions: 1.0J
Capacity Kapasiti 能力	Concrete: 16mm (5/8") | Steel: 10mm (3/8") | Wood: 13mm (1/2")
Impacts Per Minute (IPM) Impak Per Minit 冲击数	0 - 4,800
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	0 - 680
Dimensions (L x W x H) Dimensi 体积	BL1021B: 250x74x187mm (9-7/8"x2-15/16"x7-3/8")
Net Weight Berat Bersih 淨重	1.8 - 2.4kg (4.1 - 5.4lbs)
Work Amount (approx.) Jumlah Kerja 工作量	42 holes with BL1021B Mansory drill ø6mm (Concrete 40N/ mm2 Depth 40mm)

HR166D

VIDEO CLIP
Models and specs may vary by country

HR140DWYE1 14mm (9/16")

RM 1,787

Cordless Rotary Hammer
Tukul Putar Tanpa Kord
充电式电钻



2 modes

Accessories Set
For HR140DWYE1 only



- **2-Mode operation for Rotation Only or Hammering with Rotation**

Standard Equipment: Side Grip, Depth Gauge

- DWYE1: 1x Standard Charger, 2x 1.5Ah Battery, Accessories Set

*Not applicable for Z model

Impact Energy Kekuatan Impak 单次最大锤击力	EPTA-Procedure 05/2009: 1.0J Our experimental conditions: 0.9J
Capacity Kapasiti 能力	Concrete: 14mm (9/16") | Steel: 10mm (3/8") | Wood: 13mm (1/2")
Impacts Per Minute (IPM) Impak Per Minit 冲击数	0 - 4,900
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	0 - 850
Dimensions (L x W x H) Dimensi 体积	BL1021B: 246x74x179mm (9-11/16"x2-15/16"x7") BL1041B: 246x74x198mm (9-11/16"x2-15/16"x7-3/4")
Net Weight Berat Bersih 淨重	1.9 - 2.6kg (4.3 - 5.6lbs)
Work Amount (approx.) Jumlah Kerja 工作量	32 holes with BL1021B Mansory drill ø6mm (Concrete 40N/ mm2 Depth 40mm)

TL064DSME | TL064DWAE | TL064DZ

RM 1,945 | RM 1,682 | RM 1,115

Cordless Angle Impact Driver
Pemutar Skru Impak Sudut Tanpa Kord
充电式角向冲击螺丝起子机





- **Compact & lightweight for fastening and loosening in tight spaces**

Standard Equipment: Phillips Bit, Belt Clip

- DSME: 1x Speed Charger, 2x 4.0Ah Battery
- DWAE: 1x Standard Charger, 2x 2.0Ah Battery
- DZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Capacity Kapasiti 能力	Machine Screw: M4 - M8 (5/32" - 5/16") Standard Bolt: M4 - M12 (5/32" - 1/2") High Tensile Bolt: M4 - M8 (5/32" - 5/16") Coarse thread (in length): 22 - 75mm (7/8" - 2-31/32")
Hex Shank Batang Heksagon 六角柄	6.35mm (1/4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	0 - 2,000
Impacts Per Minute (IPM) Impak Per Minit 冲击数	0 - 3,000
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	60N·m (530in.lbs.)
Dimensions (L x W x H) Dimensi 体积	361x66x86mm (14-1/4"x2-5/8"x3-3/8")
Net Weight Berat Bersih 淨重	1.2 - 1.6kg (2.7 - 3.6lbs)
Work Amount (approx.) Jumlah Kerja 工作量	933 pcs with BL1021B Machine Screw M8 x 16mm

TL065DSME | TL065DWAE | TL065DZ

RM 2,035 | RM 1,770 | RM 1,205

Cordless Angle Impact Wrench
Perengkuh Impak Sudut Tanpa Kord
充电式角向冲击套筒扳手





- **Compact & lightweight for fastening and loosening in tight spaces**

Standard Equipment: Belt Clip

- DSME: 1x Speed Charger, 2x 4.0Ah Battery
- DWAE: 1x Standard Charger, 2x 2.0Ah Battery
- DZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Capacity Kapasiti 能力	Standard Bolt: M4 - M12 (5/32" - 1/2") High Tensile Bolt: M4 - M8 (5/32" - 5/16")
Square Drive Batang Segi Empat 四方头	9.5mm (3/8")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	0 - 2,000
Impacts Per Minute (IPM) Impak Per Minit 冲击数	0 - 3,000
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	60N·m (530in.lbs.)
Dimensions (L x W x H) Dimensi 体积	361x66x86mm (14-1/4"x2-5/8"x3-3/8")
Net Weight Berat Bersih 淨重	1.2 - 1.6kg (2.7 - 3.6lbs)
Work Amount (approx.) Jumlah Kerja 工作量	933 pcs with BL1021B Machine Screw M8 x 16mm

DA332DWAE | DA332DZ 10mm (3/8")

RM 1,243 | RM 678

Cordless Angle Drill
Gerudi Sudut Tanpa Kord
充电式角向电钻





- **Up to 40% faster drilling and 380% longer runtime*1**

Standard Equipment: Chuck Key, Chuck Key Holder, Phillips Bit, Belt Clip

- DWAE: 1x Standard Charger, 2x 2.0Ah Battery
- DZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Capacity Kapasiti 能力	Steel: 10mm (3/8") Wood: 12mm (1/2")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	0 - 1,100
Head Height Ketinggian Kepala 高度	63mm (2-1/2")
Center Height Pusat Tinggi 中心高度	23.5mm (15/16")
Dimensions (L x W x H) Dimensi 体积	BL1021B: 313x68x86mm (12-3/8"x2-11/16"x3-3/8") BL1041B: 332x68x86mm (13-1/8"x2-11/16"x3-3/8")
Net Weight Berat Bersih 淨重	1.2 - 1.3kg (2.6 - 2.9lbs)
Work Amount (approx.) Jumlah Kerja 工作量	600 pcs with BL1021B Wood Screw ø4.1 x 38mm

***All list price shown are for reference only (exclude SST).**


*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

12Vmax CXT® Li-ion Ah 4.0 2.0 1.5

TM30DWAE | TM30DWAEX1 | TM30DZ

TM30DWAE RM 1,108 | TM30DWAEX1 RM 1,222 | TM30DZ RM 543

Cordless Multi Tool
Mesin Pemotong Berbilang Fungsi Tanpa Kord
充电式多功能切割打磨机



- **12 Angle settings at every 30° from 0° to 360°**

Standard Equipment: Hex Wrench

- DWAE: 1x Standard Charger, 2x 2.0Ah Battery
- DWAEX1: 1x Standard Charger, 2x 2.0Ah Battery, Accessories Set (Plunge Cut Saw Blade 28 (B-21353), Segment Saw Blade 85 (B-21325), Sanding Pad (B-46202)
- DZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model



For TM30DWAEX1 only




Oscillations Per Minute (OPM) Kelajuan Ayunan 摆动速度	6,000 - 20,000
Oscillation Angle Sudut Ayunan 摆动角度	Left: 1.6° | Right: 1.6° | Total: 3.2°
Dimensions (L x W x H) Dimensi 体积	277x65x98mm (10-7/8"x2-9/16"x3-7/8")
Net Weight Berat Bersih 净重	1.1 - 1.3kg (2.3 - 2.9lbs)
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	16 min with BL1021B

CP100DWA | CP100DZ

CP100DWA RM 885 | CP100DZ RM 502

Cordless Multi Cutter
Pemotong Pelbagai Fungsi Tanpa Kord
充电式多功能电剪



- **Cuts thin and thick material up to 6mm such as cardboard, carpet, fabrics, leather, CD, DVD & Blu-ray**



CP100D

VIDEO CLIP
Models and specs may vary by country

Standard Equipment: Blade

- DWA: 1x Standard Charger, 1x 2.0Ah Battery, Tool Bag
- DZ: Without Charger & Battery

Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	6mm (1/4")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	300
Dimensions (L x W x H) Dimensi 体积	BL1021B: 272x66x120mm (10-3/4"x2-5/8"x4-3/4")
	BL1041B: 291x66x121mm (11-1/2"x2-5/8"x4-3/4")
Net Weight Berat Bersih 净重	0.72 - 0.88kg (1.6 - 1.9lbs)
Work Amount (approx.) Jumlah Kerja 工作量	800 m with BL1021B Cardboard Carton 5mm (T) 500mm (L)

Cordless Threaded Rod Cutter

Pemotong Batang Keluli Tanpa Kord 充电式螺纹杆切割机

Lightweight
Ringan 轻量
2.8kg
with BL1041B 4.0Ah Battery

Maximum Cutting Capacity
Kapasiti Pemotongan Maksimum 最大切割能力
Mild Steel: **M10**
Stainless Steel: **W3/8**

Guide scale
Panjang hos 软管长度

LED job light
Lampu kerja LED LED工作灯


Reversing switch lever
Tuas suis terbalik 反转变化开关杆





Compact motor section with overall length of
177mm
Bahagian motor padat dengan panjang keseluruhan 177mm 紧凑的电机全长177mm

Metal hook
Cangkuk logam 金属挂钩



Clean cut surface
Burr-free cuts allow for easy nut tightening
Permukaan pemotong yang bersih untuk mengetatkan skru dengan mudah
干净的切割表面易于拧紧螺母

SC103DZJ

RM 6,083

Cordless Threaded Rod Cutter
Pemotong Batang Keluli Tanpa Kord
充电式螺纹杆切割机



- **More Compact & High Productivity**

Standard Equipment: Cutter Blade W3/8 (199081-0), Hex socket head bolt, Blade Cover, Depth Gauge, Thumb screw, Hex Wrench

- DZJ: With 1x Makpac Connector Box, Without Charger & Battery

*Not applicable for Z model

BL MOTOR



Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	Mild Steel: M10 Stainless Steel: W3/8
Min. Cutting Length Panjang Pemotongan Minimum 最小切割长度	20mm (13/16")
Dimensions (L x W x H) Dimensi 体积	180x107x289mm (7-1/8"x4-1/4"x11-3/8")
Net Weight Berat Bersih 净重	2.7 - 2.8kg (6.0 - 6.2lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	550 pcs with BL1041B Mild Steel M10

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

12Vmax CXT® Li-ion Ah 4.0 2.0 1.5

PV301DZ
RM 1,582

Cordless Sander Polisher
Penggilap Tanpa Kord
充电式打蜡抛光机





- **Easy to change Hook & Loop style backing pad mainly for polishing**

Standard Equipment: Side Grip, Pad 75 (743125-4), Pad 50 (743124-6), Adapter (743126-2), Sponge Pad Rough (191N90-9), Sponge Pad Medium (191N91-7), Wool Pad (191N92-5)

- DZ: Without Charger & Battery

BL MOTOR XPT

Pad / Disc Diameter Diameter Pad / Cakera 垫/盘直径	**Hook & Loop Style: 80mm (3-1/8")** **Twist-On / Twist-Off Style: 50mm (2")**
Backing Pad Diameter Diameter Pad 衬垫直径	**Hook & Loop Style: 75mm (2-15/16")** **Twist-On / Twist-Off Style: 46mm (1-13/16")**
Head Length Panjang Kepala 头长度	**127mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Polishing: 0 - 2,800 | Sanding: 0 - 9,500**
Dimensions (L x W x H) Dimensi 体积	**137x67x231mm** **(5-3/8x2-5/8x9-1/8")**
Net Weight Berat Bersih 淨重	**1.1 - 1.2kg (2.4 - 2.6lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**18 min with BL1041B**

CC301DWME | CC301DWAE | CC301DZ 85mm (3-3/8")
CC301DWME RM 1,537 | CC301DWAE RM 1,355 | CC301DZ RM 790

Cordless Cutter
Pemotong Tanpa Kord
充电式切割机





- **Designed for cutting glass and ceramic tile**

Standard Equipment: Diamond Wheel, Water Supply Tank Assembly, Hex Wrench

- DWME: 1x Standard Charger, 2x 4.0Ah Battery
- DWAE: 1x Standard Charger, 2x 2.0Ah Battery
- DZ: Without Charger, Battery & Carrying Case

45°

Blade Diameter Diameter Bilah 锯片直径	**85mm (3-3/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 25.5mm (1")** **45°: 16.5mm (5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**1,600**
Tank Capacity Kapasiti Tangki 水箱容量	**Water : 0.5L**
Dimensions (L x W x H) Dimensi 体积	**313x170x125mm** **(12-3/8"x6-11/16"x4-7/8")**
Net Weight Berat Bersih 淨重	**1.9kg (4.1lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**1.5 pcs with BL1021B** **Diamond Blade, Glass 10 x 300mm**

HS301DSME | HS301DWAE | HS301DZ 85mm (3-3/8")
HS301DSME RM 1,380 | HS301DWAE RM 1,115 | HS301DZ RM 550

Cordless Circular Saw
Gergaji Piring Tanpa Kord
充电式圆锯





- **Fast cutting of plywood, MDF, pegboard, particleboard, melamine, drywall and more**

Standard Equipment: TCT Saw Blade (B-14607), Hex Wrench

- DSME: 1x Speed Charger, 2x 4.0Ah Battery
- DWAE: 1x Standard Charger, 2x 2.0Ah Battery
- DZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Blade Diameter Diameter Bilah 锯片直径	**85mm (3-3/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 25.5mm (1")** **45°: 16.5mm (5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**1,500**
Dimensions (L x W x H) Dimensi 体积	**313x170x155mm** **(12-3/8"x6-11/16"x6-1/8")**
Net Weight Berat Bersih 淨重	**1.6 - 1.7kg (3.5 - 3.8lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**140 cuts with BL1021B** **Sawing (SPF 1"x4" 0 Degree Cut)**

SD100DWAJ | SD100DZ
SD100DWAJ RM 1,932 | SD100DZ RM 1,367

Cordless Drywall Saw
Gergaji Drywall Tanpa Kord
充电式石膏板切割机





- **Ideal for cutting holes in drywalls when setting ceiling lights, air vents etc**

Standard Equipment: Blade, Blade Cover, Base Cover, Hex Wrench

- DWAJ: 1x Standard Charger, 2x 2.0Ah Battery, 1x Makpac Connector Box
- DZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 6,000**
Length of Stroke Panjang Strok 冲程长度	**6mm (1/4")**
Capacity Kapasiti 能力	**Drywall: 30mm (1-3/16")** **Wood: 15mm (9/16")**
Dimensions (L x W x H) Dimensi 体积	**239x79x266mm** **(9-3/8"x3-1/8"x10-1/2")**
Net Weight Berat Bersih 淨重	**1.4 - 1.6kg (3.2 - 3.5lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**50 m with BL1021B** **Cutting** **(Gypsum Board Thickness 9.5mm/ 2ply)**

JV101DWAE | JV101DWYE | JV101DZ
JV101DWAE RM 1,060 | JV101DWYE RM 1,007 | JV101DZ RM 497

Cordless Jig Saw
Gergaji Jig Tanpa Kord
充电式线锯机





- **Aluminum die-cast base adjusts from 0°-45° right to left**

Standard Equipment: Jig Saw Blade B-10 (A-85628), Hex Wrench

- DWAE: 1x Standard Charger, 2x 2.0Ah Battery
- DWYE: 1x Standard Charger, 2x 1.5Ah Battery
- DZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Max Cutting Capacity at 90° Kapasiti Pemotongan Maksimum 最大切割能力	**Wood: 65mm (2-9/16")** **Aluminum: 4mm (5/32")** **Mild Steel: 2mm (1/16")**
Length of Stroke Panjang Strok 冲程长度	**18mm (11/16")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0-2,900**
Dimensions (L x W x H) Dimensi 体积	**232x76x196mm** **(9-1/8"x3"x7-3/4")**
Net Weight Berat Bersih 淨重	**1.8 - 1.9kg (3.9 - 4.3lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**60 pcs with BL1021B** **Sawing** **(Plywood 300mm Long x 12mm thickness)**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

12Vmax CXT® Li-ion Ah 4.0 2.0 1.5

JV103DSMJ | JV103DWAJ | JV103DZ

RM 1,860 | RM 1,595 | RM 1,030

Cordless Jig Saw
Gergaji Jig Tanpa Kord
充电式线锯机





- **Up to 2.2X Faster Cutting & 2.2X Longer Runtime*1**

Standard Equipment:
Jig Saw Blade B-10 (A-85628), Hex Wrench

- DSMJ: 1x Speed Charger, 2x 4.0Ah Battery, 1x Makpac Connector Box
- DWAJ: 1x Standard Charger, 2x 2.0Ah Battery, 1x Makpac Connector Box
- DZ: Without Charger, Battery & Carrying Case

JV102D/103D — VIDEO CLIP (Models and specs may vary by country)

*Not applicable for Z model

BL MOTOR

Max Cutting Capacity at 90° Kapasiti Pemotongan Maksimum 最大切割能力	**Wood: 90mm (3-1/2")** **Aluminum: 20mm (13/16")** **Mild Steel: 10mm (3/8")**
Length of Stroke Panjang Strok 冲程长度	**23mm (7/8")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**800 - 3,000**
Dimensions (L x W x H) Dimensi 体积	**237x76x206mm** **(9-3/8"x3"x8-1/8")**
Net Weight Berat Bersih 淨重	**1.9 - 2.0kg (4.1 - 4.4lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**90 pcs with BL1021B** **Sawing** **(Plywood 300mm Long x 12mm thickness)**

JV102DZ

RM 1,030

Cordless Jig Saw
Gergaji Jig Tanpa Kord
充电式线锯机





- **Up to 2.2X Faster Cutting & 2.2X Longer Runtime*1**

Standard Equipment:
Jig Saw Blade B-10 (A-85628), Hex Wrench

- DZ : Without Charger & Battery

JV102D/103D — VIDEO CLIP (Models and specs may vary by country)

BL MOTOR

Max Cutting Capacity at 90° Kapasiti Pemotongan Maksimum 最大切割能力	**Wood: 90mm (3-1/2")** **Aluminum: 20mm (13/16")** **Mild Steel: 10mm (3/8")**
Length of Stroke Panjang Strok 冲程长度	**23mm (7/8")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**800 - 3,000**
Dimensions (L x W x H) Dimensi 体积	**237x76x186mm** **(9-3/8"x3"x7-3/8")**
Net Weight Berat Bersih 淨重	**1.8 - 1.9kg (3.9 - 4.2lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**290 pcs with BL1021B** **Sawing** **(Plywood 300mm Long x 12mm thickness)**

PT354DZ

RM 2,378

Cordless Pin Nailer
Mesin Pemaku Tanpa Kord
充电式打钉机







- **Ergonomically designed handle with soft grip provides increased comfort**

Standard Equipment: Nose Adapter, Safety Goggles, Belt Clip, Hex Wrench

- DZ: Without Charger & Battery

Capacity Kapasiti 能力	**Length: 15, 18, 25, 30, 35mm** **(5/8", 11/16", 1", 1-3/16", 1-3/8")** **Dia.: 0.6mm (1/32")** **Gauge: 23Ga**
Magazine Capacity Bilangan Staples 装钉个数	**120**
Dimensions (L x W x H) Dimensi 体积	**231x66x226mm** **(9-1/8"x2-5/8"x8-7/8")**
Net Weight Berat Bersih 淨重	**1.8 - 2.0kg (4.0 - 4.4lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**1333 pcs with BL1021B** **Pin nail**

Accessories (optional)

Description	Size	Pcs/ Box	Part No.
Pin Nail 18mm (11/16")	P18	10,000	F-31825
Pin Nail 25mm (1")	P25	10,000	F-31838
Pin Nail 30mm (1-3/16")	P30	10,000	F-31841
Pin Nail 35mm (1-3/8")	P35	10,000	F-31854

CG100DZA

RM 1,383

Cordless Caulking Gun
Alat Tembak Silikon Tanpa Kord
充电式填缝枪





- **5 Speed dial optimizes flow rate 0 - 28mm/sec**

Standard Equipment: Holder, Holder Joint, Piston, Rack 42, Safety Goggles

- DZA: Without Charger & Battery


CG100D — VIDEO CLIP (Models and specs may vary by country)

Max Dispersing Force Tujahan Maksimum 最大推力	**5,000N (1,100lbs)**
No Load Speed Kelajuan Tanpa Beban 回转数	**0 - 28mm/sec. (0 - 66in/min.)**
Holder Size Kapasiti 容量	**300mL** **(Optional Accessories 600mL, 800mL Holder)**
Dimensions (L x W x H) Dimensi 体积	**404x108x259mm** **(15-7/8"x4-1/4"x10-1/4")**
Net Weight Berat Bersih 淨重	**1.9 - 2.6kg (4.2 - 5.8lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**150 pcs with BL1016** **300ml silicon sealant**

JR105DWAE | JR105DZ

RM 1,070 | RM 505

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯





- **Cuts PVC, ABS pipe, EMT, drywall, wood & more**

Standard Equipment: Hex Wrench, Recipro Saw Blades 2pcs (B-20404 & B-20432)

- DWAE: 1x Standard Charger, 2x 2.0Ah Battery
- DZ: Without Charger, Battery & Carrying Case

*Not applicable for Z model

Length of Stroke Panjang Strok 冲程长度	**13mm (1/2")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 3,300**
Capacity Kapasiti 能力	**Pipe: 50mm (2")** **Wood: 50mm (2")**
Dimensions (L x W x H) Dimensi 体积	**376x66x186mm** **(14-3/4"x2-5/8"x7-3/8")**
Net Weight Berat Bersih 淨重	**1.3 - 1.5kg (2.9 - 3.2lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**45 pcs with BL1021B** **Cutting (PVC plastic hose 48mm)**


***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

12Vmax CXT® Li-ion Ah 4.0 2.0 1.5

UR100DSME | UR100DZ
RM 1,457 | RM 628

Cordless Grass Trimmer
Pemotong Rumput tanpa Kord
充电式割草机





- **Well balanced design with fully adjustable features to suit any operator**

Standard Equipment: Band Assembly, Nylon Cutting Head (198853-0), Nylon Cord, Accessory Bag, Hex Wrench

- DSME: 1x Speed Charger, 2x 4.0Ah Battery
- DZ: Without Charger & Battery

Cutting Width Lebar Keratan 切割宽度	**Nylon Cutting Head: 260mm (10")** **Plastic Blade: 230mm (9")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Nylon Cutting Head: 9,000** **Plastic Blade: 10,000**
Spindle Size Saiz Spindel 主轴尺寸	**M8 x 1.25RH**
Dimensions (L x W x H) Dimensi 体积	**835 - 1,185x267x210 - 315mm** **(32-7/8 - 46-2/3"x10-1/2"x8-1/4 - 12-1/3")**
Net Weight Berat Bersih 淨重	**2.1 - 2.3kg (4.4 - 4.9lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**27 min with BL1021B**

UH353DWA | NEW UH353DZ 350mm (13-3/4")
RM 1,095 | RM 713

Cordless Hedge Trimmer
Pemangkas Tanaman Pagar
Tanpa Kord
充电式篱笆修剪机



- **Lightweight. Low Vibration. Low Noise**


Standard Equipment: Blade Cover

- DWA: 1x Standard Charger, 1x 2.0Ah Battery
- DZ: Without Charger & Battery

Blade Length Panjang bilah 刀片长度	**350mm (13-3/4")**
Tooth Spacing Selang Gigi 牙齿间隔	**28mm (1-1/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**15mm (9/16")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**3,300**
Dimensions (L x W x H) Dimensi 体积	**693x175x165mm** **(27-1/4"x6-7/8"x6-1/2")**
Net Weight Berat Bersih 淨重	**1.9 - 2.1 kg (4.2 - 4.5 lbs.)**
Continuous Usage Time Masa Penggunaan Berterusan 连续使用时间	**40 min with BL1021B**

UN460WDZ
RM 930

Cordless Pole Hedge Trimmer
Pemangkas Tanaman Pagar
Tinggi Tanpa Kord
充电式高枝篱笆树剪

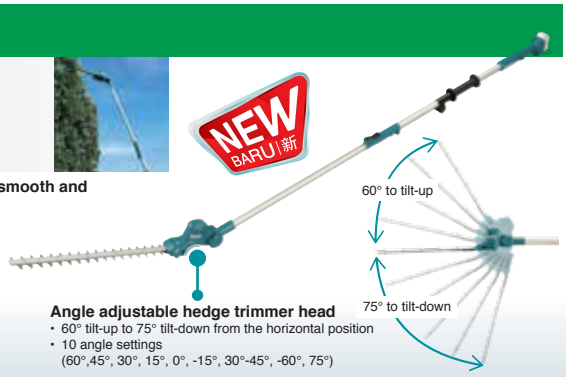

- **High cutting speed enables smooth and efficient trimming**

Angle adjustable hedge trimmer head
- 60° tilt-up to 75° tilt-down from the horizontal position
- 10 angle settings
(60°,45°, 30°, 15°, 0°, -15°, 30°-45°, -60°, 75°)

Standard Equipment:
Blade Cover

- DZ: Without Charger & Battery

Blade Length Panjang Bilah 刀片长度	**460mm (18-1/8")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**3,600**
Tooth Spacing Selang Gigi 牙齿间隔	**28mm (1-1/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**18mm (11/16")**
Dimensions (L x W x H) Dimensi 体积	**1,889-2,511x87x134mm** **(74-1/2-99x3-7/16x5-1/4")**
Net Weight Berat Bersih 淨重	**2.8 - 3.0kg (6.2 - 6.6lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**53 min with BL1041B**

UH201DWAX | UH201DZ 200mm (7-7/8")
RM 915 | RM 450

Cordless Hedge Trimmer
Pemangkas Tanaman Pagar
Tanpa Kord
充电式篱笆修剪机





- **Dual blade action cuts quickly with a shearing effect**

Standard Equipment: Blade Cover (458342-0), Chip Receiver (198401-5)

- DWAX: 1x Standard Charger, 1x 2.0Ah Battery, 1x Grass Shear Blade (195267-4), 1x Grass Receiver (457426-1)
- DZ: Without Charger & Battery

For UH201DWAX only



Grass Shear Blade (195267-4)


Grass Receiver (457426-1)

Blade Length Panjang Bilah 刀片长度	**200mm (7-7/8")**
Tooth Spacing Selang Gigi 牙齿间隔	**26mm (1")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**2,500**
Dimensions (L x W x H) Dimensi 体积	**504x120x131mm** **(19-7/8"x4-3/4"x5-1/8")**
Net Weight Berat Bersih 淨重	**1.3 - 1.5kg (2.8 - 3.3lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**45 min with BL1021B**

UM600DWA | UM600DZ 160mm (6-5/16")
RM 940 | RM 557

Cordless Grass Shear
Pemotong Rumput Tanpa Kord
充电式割草机





- **2 in 1: Both trimmer blade and shear blade can be attached**

Standard Equipment: Grass Receiver, Blade Cover

- DWA: 1x Standard Charger, 1x 2.0Ah Battery
- DZ: Without Charger & Battery

Cutting Width Lebar Keratan 切割宽度	**160mm (6-5/16")**
Depth Adjustment Pelarasan Kedalaman 深度调整	**15mm (9/16") | 20mm (13/16") | 25mm (1")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**2,500**
Dimensions (L x W x H) Dimensi 体积	**329x177x131mm** **(13"x7"x5-1/8")**
Net Weight Berat Bersih 淨重	**1.3 - 1.5kg (2.8 - 3.3lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**45 min with BL1021B**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

12Vmax CXT® Li-ion Ah 4.0 2.0 1.5

US053DZ
RM 908

Cordless Garden Sprayer
Penyembur Tanaman Tanpa Kord
充电式花园喷雾器



- **2-mode selectable (Mist and Stream modes)**



NEW BARU 新

Standard Equipment:
H-Shaped Double Head Nozzle, Spray Wand, Spray Wand Holder, Shoulder Belt

- Z: Without Charger & Battery

XPT


DUS054 US053D

VIDEO CLIP Models and specs may vary by country

Max Pressure Tekanan Maksimum 最大水压	0.3Mpa (3 kgf/cm²)
Chemical Tank Tangki Kimia 化学箱容量	5L
Hose Length Panjang Hos 软管长度	1.7m
Spray Wand Length Panjang Batang Semburan 喷雾棒长度	0.5 - 0.7m
Nozzle Mounting Thread Benang Pemasangan Muncung 喷嘴安装螺纹	G 1/4
Dimensions (L x W x H) Dimensi 体积	343x182x343mm (13-1/2x7-1/8x13-1/2")
Net Weight Berat Bersih 淨重	2.9 - 3.0kg (6.4 - 6.6lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	60L (double outlet mist) 40L (single outlet mist) 75L (double outlet stream) 50L (single outlet stream) with BL1016

UB101DZ
RM 500

Cordless Blower
Mesin Penghembus Angin Tanpa Kord
充电式吹风机



- **Zero emissions and reduced maintenance; no need for gas or oil**



Standard Equipment: Garden Nozzle (191G09-6)

- DZ: Without Charger & Battery

Max Air Volume Isipadu Angin Maksimum 最大风量	2.6m³/min
Max Air Velocity Velositi Angin Maksimum 最大风速	56m/s
Avg. Air Velocity Kelajuan Angin Purata 平均风速	45m/s
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	0 - 15,800
Dimensions (L x W x H) Dimensi 体积	849x155x184mm (33-1/2x6-1/8x7-1/4")
Net Weight Berat Bersih 淨重	1.4 - 1.9kg (3.1 - 4.2lbs.)
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	Low: 45min | Med: 20min | High: 7min with BL1016

UB100DZ
RM 382

Cordless Blower
Mesin Penghembus Angin Tanpa Kord
充电式吹风机



- **Zero emissions and reduced maintenance; no need for gas or oil**



Standard Equipment: Nozzle Assembly (123245-4)

- DZ: Without Charger & Battery

Max Air Volume Isipadu Angin Maksimum 最大风量	2.6m³/min
Max Air Velocity Velositi Angin Maksimum 最大风速	75m/s
Avg. Air Velocity Kelajuan Angin Purata 平均风速	62m/s
Max Sealed Suction Sedutan Terkedap 最大密封吸力	4.0kPa
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	0 - 15,800
Dimensions (L x W x H) Dimensi 体积	505x155x184mm (19-7/8x6-1/8x7-1/4")
Net Weight Berat Bersih 淨重	1.4 - 1.9kg (3.1 - 4.2lbs.)
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	Low: 45min | Med: 20min | High: 8min with BL1016

Cordless Inflator

Inflator Tanpa Kord 充電式打氣機



Valve Shape	Car / Motorcycle	Bicycle	Road Bike	Ball	Beach ball / Swim ring
Adapter	American	British	French	For Balls	For Swim rings/ Beach balls
Maximum Air Pressure (kPa)	250 (approx.)	300 (approx.)	700 (approx.)	100 and under	50 and under
Discharge Amount (L/ min) at Target pressure	10	9	4	11	11.5
Work Amount Battery BL1016	2 Car Tires (215/60R16)	46 Bicycle Tires (Size 26inch)	20 Road Bike Tires (700 x 23c)	63 Soccer Balls (Size 5)	54 Beach Balls (dia. 30cm)

MP100DZ
RM 565

Cordless Inflator
Inflator Tanpa Kord
充电式打气机



- **Inflates the Tires of Cars, Bikes, Sport Balls, etc**



Standard Equipment: British Adapter, French Adapter, Ball Adapter, Swim Ring Adapter

- DZ: Without Charger & Battery

MP100D

VIDEO CLIP Models and specs may vary by country

Max Air Pressure Udara Tekanan Maksimum 最大气压	830kPa (121 PSI) [8.3 bar]
Air Discharge Amount Pelepasan Udara 空气排放量	200kPa: 10L/min
Hose Length Panjang Hos 软管长度	65cm (25-1/2")
Dimensions (L x W x H) Dimensi 体积	235x74x173mm (9-1/4"x2-15/16"x6-13/16")
Net Weight Berat Bersih 淨重	1.2 - 1.3kg (2.6 - 3.0lbs.)
Work Amount (approx.) Jumlah Kerja 工作量	2 tires with BL1016 (16" Car Tires 215/60R16)

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

12Vmax CXT® Li-ion Ah 4.0 2.0 1.5

SK700D RED | SK700GD GREEN

RM 2,735 | RM 3,647

Rechargeable Multi Line Laser

Mesin Garis Laser Tanpa Kord
充电式激光水平仪



- **Full 360-degree line is created by letting the laser from a light source reflect on a cone mirror**



Standard Equipment:
Target Plate, Adapter, Soft Bag

- Without Charger & Battery

NEW BARU 新

XPT

Leveling Accuracy Menunjukkan Ketepatan 指示精确度	**2mm / 10m**
Self-leveling Range Julat Indikasi Menegak 垂直指示范围	**4**
Laser Type Jenis Laser 激光类型	**Laser class 2: 630 - 645nm SK700D** **Laser class 2: 510 - 530nm SK700GD**
Protection Class Tahap Perlindungan 保护等级	**IP54**
Dimensions (L x W x H) Dimensi 体积	**149x104x153mm** **(5-7/8x4-1/8x6")**
Net Weight Berat Bersih 淨重	**0.99 - 1.2kg (2.2 - 2.7lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**22 hrs with BL1041B SK700D** **14 hrs with BL1041B SK700GD** **(max brightness mode)**

SK40GD | SK20GD | SK10GD GREEN

RM 4,502 | RM 3,282 | RM 2,735

Rechargeable Green Multi Line Laser

Mesin Garis Laser Tanpa Kord
充电式激光水平仪



- **High Brightness Green Laser for Increased Visibility at Bright Site**



NEW BARU 新

Standard Equipment:
Laser Viewing Glass, Shoulder Strap, Storage Case

- Without Charger & Battery

ACCESSORIES
(Optional)

LDG-5
Laser Receiver
Part No. TK0LDG501F



XPT


Leveling Accuracy Menunjukkan Ketepatan 指示精确度	**±1mm / 10m**
Self-leveling Range Julat Indikasi Menegak 垂直指示范围	**±4°**
Laser Fan Angle Sudut Kipas Laser 激光扇角	**Horizontal: 110°** **Vertical: 130°**
Laser Line Selection Pemilihan Garisan Laser 激光线选择	**4V1H SK40GD | 2V1H SK20GD | 1V1H SK10GD**
Laser Type Jenis Laser 激光类型	**Laser class 2: 515nm**
Protection Class Tahap Perlindungan 保护等级	**IP54**
Dimensions (L x W x H) Dimensi 体积	**Ø98x223mm**
Net Weight Berat Bersih 淨重	**1.4 - 1.6kg (3.1 - 3.5lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**6 hrs with BL1016 SK40GD** **9 hrs with BL1016 SK20GD** **12 hrs with BL1016 SK10GD** **(max brightness mode)**

SK209GDZ | SK312GDZ GREEN

RM 7,065 | RM 8,338

Rechargeable Green Multi Line Laser

Mesin Garis Laser Tanpa Kord
充电式激光水平仪



- **Horizontal line - 2-Vertical line - 2-Vertical line/ horizontal line (SK209GD)**
- **Horizontal line - Horizontal/ vertical line - 3-Vertical line/ horizontal line (SK312GD)**



Standard Equipment: Laser Viewing Glass, Shoulder Strap, Storage Case

- DZ : Without Charger & Battery

XPT

Leveling Accuracy Menunjukkan Ketepatan 指示精确度	**±1mm/ 10m**
Self-leveling Range Julat Indikasi Menegak 垂直指示范围	**±2°**
Laser Fan Angle Sudut Peminat Laser 激光扇角	**Horizontal: 110°/ Vertical: 130°**
Number of Laser Lines Bilangan Garisan Laser 激光线数量	**3**
Laser Type Jenis Laser 激光类型	**Laser class 2: 515nm**
Tripod Thread Tripod 脚架	**5/8"**
Protection Class Tahap Perlindungan 保护等级	**IP54**
Dimensions (L x W x H) Dimensi 体积	**BL1021B: 122x110x225mm**
Net Weight Berat Bersih 淨重	**1.5 - 1.6kg (3.3 - 3.5lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**20 hrs with BL1021B SK209GD (max output)** **14 hrs with BL1021B SK312GD (max output)**

SK106DZ RED | SK106GDZ GREEN

RM 2,015 | RM 3,408

Rechargeable Red 4-point Cross Line Laser

Mesin Garis Laser Tanpa Kord
充电式激光水平仪

- **Brightness selection:**
  2 Modes (Bright mode/ Eco mode)



Standard Equipment: Soft Bag, Target Plate

- DZ : Without Charger & Battery

XPT

Measuring Range Jarak Mengukur 测量范围	**Up to: 25m SK106D** **Up to: 35m SK106GD**
Measuring Range w/ detector Jarak Mengukur 测量范围	**Up to: 80m**
Leveling Accuracy Menunjukkan Ketepatan 指示精确度	**±3mm/ 10m**
Self-leveling Range Julat Indikasi Menegak 垂直指示范围	**±4°**
Laser Fan Angle Sudut Peminat Laser 激光扇角	**Horizontal: 180°/ Vertical: 170°**
Number of Laser Bilangan Laser 激光数量	**Points : 4** **Lines : 2**
Laser Type Jenis Laser 激光类型	**Laser class 2: 635nm SK106D** **Laser class 2: 525nm SK106GD**
Dimensions (L x W x H) Dimensi 体积	**138x64x102mm** **(5-7/16"x2-1/2"x4")**
Net Weight Berat Bersih 淨重	**0.69 - 0.85kg (1.5 - 1.9lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**20 hrs with BL1021B SK106D (max output)** **10 hrs with BL1021B SK106GD (max output)**

SK105DZ RED | SK105GDZ GREEN

RM 1,192 | RM 2,340

Rechargeable Red Cross Line Laser

Mesin Garis Laser Tanpa Kord
充电式激光水平仪

- **Brightness selection:**
  2 Modes (Bright mode/ Eco mode)



Standard Equipment: Soft Bag, Target Plate

- DZ : Without Charger & Battery

XPT

Measuring Range Jarak Mengukur 测量范围	**Up to: 25m SK105D** **Up to: 35m SK105GD**
Measuring Range w/ detector Jarak Mengukur 测量范围	**Up to: 80m**
Leveling Accuracy Menunjukkan Ketepatan 指示精确度	**±3mm/ 10m**
Self-leveling Range Julat Indikasi Menegak 垂直指示范围	**±4°**
Laser Fan Angle Sudut Peminat Laser 激光扇角	**Horizontal: 180°/ Vertical: 160°**
Number of Laser Lines Bilangan Garisan Laser 激光线数量	**2**
Laser Type Jenis Laser 激光类型	**Laser class 2: 635nm SK105D** **Laser class 2: 525nm SK105GD**
Dimensions (L x W x H) Dimensi 体积	**138x64x102mm** **(5-7/16"x2-1/2"x4")**
Net Weight Berat Bersih 淨重	**0.67 - 0.84 kg (1.5 - 1.9 lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**20 hrs with BL1021B SK105D (max output)** **10 hrs with BL1021B SK105GD (max output)**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

10.8V Li-ion Ah 1.3

Cordless Hammer Driver Drill


Tukul Pemutar Skru Bergerudi Tanpa Kord 充电式冲击螺丝起子电钻



DRILLING
Penggerudian 钻孔



FASTENING
Pengetat 紧固



HAMMER DRILLING
Tukul Bergerudi 冲击电钻



HP330DWE 10mm (3/8")
RM 877

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻





- **Hammer drill mode**

Standard Equipment: Phillips Bit, Holster

- DWE: 1x Standard Charger, 2x 1.3Ah Battery

Capacity Kapasiti 能力	**Steel: 10mm (3/8") | Wood: 21mm (13/16") | Masonry: 8mm (5/16")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High: 0-22,500 Low: 0-6,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0-1,500 Low: 0-400**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**Hard: 24N·m | Soft: 12N·m**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**22N·m (200in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**201x53x183mm (7-7/8"x2-1/16"x7-1/4")**
Net Weight Berat Bersih 净重	**1.1kg (2.3lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**220 holes with BL1013** **Auger Bit Drilling Ø9mm, Melapi 30mm Thickness**

DF330DWE 10mm (3/8")
RM 687

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻





- **2-Speed design driver drill**

Standard Equipment: Phillips Bit, Holster

- DWE: 1x Standard Charger, 2x 1.3Ah Battery

Capacity Kapasiti 能力	**Steel: 10mm (3/8")** **Wood: 21mm (13/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0-1,300 Low: 0-350**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**Hard: 24N·m | Soft: 14N·m**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**22N·m (200in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**189x53x183mm (7-7/16"x2-1/16"x7-1/4")**
Net Weight Berat Bersih 净重	**1kg (2.2lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**220 holes with BL1013** **Auger Bit Drilling Ø9mm, Melapi 30mm Thickness**

DF030DWE 10mm (3/8")
RM 665

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



- **18 clutch settings and drill mode for added fastening control**



Standard Equipment: Phillips Bit, Holster

- DWE: 1x Standard Charger, 2x 1.3Ah Battery

Capacity Kapasiti 能力	**Steel: 10mm (3/8")** **Wood: 21mm (13/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0-1,300 Low: 0-350**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**Hard:24N·m | Soft: 14N·m**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**22N·m (200 in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**157x53x183mm (6-3/16"x2-1/16"x7-1/4")**
Net Weight Berat Bersih 净重	**0.89kg (2.0lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**190 holes with BL1013** **Wood Drill ø9mm**

TD090DWE
RM 755

Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机



- **Compact bit sleeve 1/4" drive**



Standard Equipment: Holster

- DWE: 1x Standard Charger, 2x 1.3Ah Battery

Capacity Kapasiti 能力	**Machine Screw:** **M4 - M8mm (5/32" - 5/16")** **Standard Bolt:** **M5 - M12 (3/16" - 1/2")** **High Tensile Bolt:** **M5 - M10 (3/16" - 3/8")** **Coarse thread (in length):** **22 - 90mm (7/8" - 3-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0-2,400**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0-3,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**90N·m (800in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**155x54x178mm (6-1/8"x2-1/8"x7")**
Net Weight Berat Bersih 净重	**0.92kg (2.0lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**550 pcs with BL1013** **Bolts M8 x 16mm**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

10.8V Li-ion Ah 1.3

TD091DWE
RM 792

440 g

Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机






- Battery power reduction warning lamp

- DWE: 1x Standard Charger, 2x 1.3Ah Battery

Capacity Kapasiti 能力	**Machine Screw:** **M4 - M8 (5/32" - 5/16")** **Standard Bolt:** **M5 - M12 (3/16" - 1/2")** **High Tensile Bolt:** **M5 - M10 (3/16" - 3/8")** **Coarse thread (in length):** **22 - 90mm (7/8" - 3-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,400**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**90N·m (800in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**134x54x200mm** **(5-1/4"x2-1/8"x7-7/8")**
Net Weight Berat Bersih 淨重	**0.86kg (1.9lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**480 pcs with BL1013** **Bolts M8x16mm**

TW100DWE 9.5mm (3/8")
RM 608

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手





- 9.5mm (3/8") square drive fits most common automotive sockets

- DWE: 1x Standard Charger, 2x 1.3Ah Battery

Fastening Capacities Keupayaan Pengancing 紧固能力	**Standard Bolt:** **M8 - M12 (5/16" - 1/2")** **High Tensile Bolt:** **M6 - M10 (1/4" - 3/8")**
Square Drive Batang Segi Empat 四方头	**9.5mm (3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,300**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**110N·m (1,000in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**163x54x178mm** **(6-3/8"x2-1/8"x7")**
Net Weight Berat Bersih 淨重	**0.95kg (2.1lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**550 pcs with BL1013** **Bolts M8x16mm**

CC300DW | CC300DZ 85mm (3-3/8")
RM 987 | RM 710

Cordless Cutter
Pemotong Tanpa Wayar
充电式切割机





- Adjustable cutting depth up to 25.5mm at 90° and 16.5mm at 45°


Standard Equipment: Diamond Wheel, Water Supply Tank Assembly, Hex Wrench

- DW: 1x Standard Charger, 1x 1.3Ah Battery
- DZ: Without Charger, Battery & Carrying Case

Blade Diameter Diameter Bilah 锯片直径	**85mm (3-3/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 25.5mm (1")** **45°: 16.5mm (5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**1,400**
Tank capacity Kapasiti Tangki 水箱容量	**Water : 0.5L**
Dimensions (L x W x H) Dimensi 体积	**300x170x154mm** **(11-3/4"x6-11/16"x6-1/16")**
Net weight Berat Bersih 淨重	**16kg (3.6lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**2.5 pcs with BL1013** **Diamond Blade** **(Cut Glass 10x300mm)**

HS300DW 85mm (3-3/8")
RM 832

Cordless Circular Saw
Gergaji Piring Tanpa Kord
充电式圆锯





- Fast cutting of plywood, MDF, pegboard, particleboard, melamine, drywall and more

Standard Equipment: TCT Saw Blade (B-14607), Hex Wrench

- DW: 1x Standard Charger, 1x 1.3Ah Battery

Blade Diameter Diameter Bilah 锯片直径	**85mm (3-3/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 25.5mm (1")** **45°: 16.5mm (5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**1,400**
Dimensions (L x W x H) Dimensi 体积	**300x170x154mm** **(11-3/4"x6-11/16"x6-1/16")**
Net Weight Berat Bersih 淨重	**1.5kg (3.4lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**90 cuts with BL1013** **Sawing SPF 1"x4" (0 Degree Cut)**

JV100DWE
RM 865

Cordless Jig Saw
Gergaji Jig Tanpa Kord
充电式线锯机





- Aluminum die-cast base adjusts from 0°-45° right to left

Standard Equipment: Jig Saw Blade (B-10), Hex Wrench, Guide Rule

- DWE: 1x Standard Charger, 2x 1.3Ah Battery

Max Cutting Capacity at 90° Kapasiti Pemotongan Maksimum 最大切割能力	**Wood: 65mm (2-9/16")** **Aluminum: 4mm (5/32")** **Mild Steel: 2mm (1/16")**
Length of Stroke Panjang Strok 冲程长度	**18mm (11/16")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 2,400**
Dimensions (L x W x H) Dimensi 体积	**231x76x196mm** **(9-1/8"x3"x7-3/4")**
Net Weight Berat Bersih 淨重	**1.7kg (3.7lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**26 pcs with BL1013** **Sawing (Fibreboard MDF 300x12mm)**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

10.8V 7.2V Li-ion Ah 1.5 1.3 1.0

JR100DWE
RM 920

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯



10.8V

- **Dual-position on/off switch design allows for either paddle or trigger switch operation**



Standard Equipment:
Recipro Saw Blades 2pcs (B-20404 & B-20432)
- DWE: 1x Standard Charger, 2x 1.3Ah Battery

Capacity Kapasiti 能力	**Pipe : 50mm (2")** **Wood: 50mm (2")**
Length of Stroke Panjang Strok 冲程长度	**13mm (1/2")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0-3,300**
Dimensions (L x W x H) Dimensi 体积	**355x63x146mm** **(14"x2-1/2"x5-3/4")**
Net Weight Berat Bersih 淨重	**1.2kg (2.6lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**55 pcs with BL1013** **Cutting (PVC Plastic Hose 48mm)**

JR102DWE
RM 885

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯



10.8V

- **Accepts both Recipro and Jig saw blades**




Standard Equipment: Hex Wrench,
Recipro Saw Blades 2pcs (B-20404 & B-20432)
- DWE: 1x Standard Charger, 2x 1.3Ah Battery

Capacity Kapasiti 能力	**Pipe : 50mm (2")** **Wood: 50mm (2")**
Length of Stroke Panjang Strok 冲程长度	**13mm (1/2")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0-3,300**
Dimensions (L x W x H) Dimensi 体积	**355x63x146mm** **(14"x2-1/2"x5-3/4")**
Net Weight Berat Bersih 淨重	**1.2kg (2.6lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**55 pcs with BL1013** **Cutting (PVC Plastic Hose 48mm)**

TD022DSE
RM 953

Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机



7.2V

- **Compact and lightweight design**



Standard Equipment: Holster, Phillips Bit
- DSE: 1x Standard Charger, 2x 1.5Ah Battery

Capacity Kapasiti 能力	**Machine Screw: M3 - M8 (1/8" - 5/16")** **Standard Bolt: M3 - M8 (1/8" - 5/16")** **High Tensile Bolt: M3 - M6 (1/8" - 1/4")** **Coarse thread (in length): 22 - 45mm (7/8" - 1-3/4")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,450**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**25N·m (220in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**Straight Style: 282x42x52mm** **(11-1/8"x1-5/8"x2-1/16")** **Pistol Style: 227x42x142mm** **(8-15/16"x1-5/8"x5-5/8")**
Net Weight Berat Bersih 淨重	**0.55 - 0.56kg (1.2lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**320 pcs with BL7010** **Wood Screw ø3.1x25mm (Melapi Drove Wood)**

TD020DSW
RM 710

Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机



7.2V

- **Compact and lightweight design**



Standard Equipment: Holster, Bit set
- DSW: 1x Standard Charger, 1x 1.0Ah Battery (White)

Capacity Kapasiti 能力	**Machine Screw: M3 - M8 (1/8" - 5/16")** **Standard Bolt: M3 - M8 (1/8" - 5/16")** **High Tensile Bolt: M3 - M6 (1/8" - 1/4")** **Coarse thread (in length): 22 - 45mm (7/8" - 1-3/4")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,300**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**3,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**20N·m (177in.lbs.)**
Dimensions (L x W) Dimensi 体积	**Straight Style: 276x40mm** **(10-7/8"x1-9/16")**
Dimensions (L x W x H) Dimensi 体积	**Pistol Style: 213x40x131mm** **(8-3/8"x1-9/16"x5-1/8")**
Net Weight Berat Bersih 淨重	**0.53 - 0.54kg (1.2lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**232 pcs with BL7010** **Wood screw ø3.1x25mm (Melapi White Wood)**

DF012DSE
RM 885

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



7.2V

- **2-Speed design for high or low torque applications**



Standard Equipment: Phillips Bit 2pcs
- DSE: 1x Standard Charger, 2x 1.5Ah Battery

Capacity Kapasiti 能力	**Steel: 5mm (3/16")** **Wood: 6mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 650** **Low: 200**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**Hard: 5.6N·m (50in.lbs.)** **Soft: 3.6N·m (32in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**8.0N·m (71in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**Pistol Style: 218x44x142mm** **(8-5/8"x1-3/4"x5-5/8")**
Dimensions (L x W) Dimensi 体积	**Straight Style: 273x44mm** **(10-3/4"x1-3/4")**
Net Weight Berat Bersih 淨重	**0.53kg (1.2lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**350 pcs with BL7010** **Wood screw ø3.8x25mm** **(Melapi Drove Wood)**

***All list price shown are for reference only (exclude SST).**
*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

3.6V 14.4V

DF001DW Li-ion 3.6V
In-Line Cordless Screwdriver

Pemutar Skru Tanpa Kord Yang Tahan Lasak 充电式螺丝起子机

Comes with 81pcs assortment and Charger

Termasuk 81 bit dan pengecas | 81支配件与充电器套装

Drive type

Phillips (PH)	PZ	Hex (H)
✚	✚	⬡
T	**Slotted (SL)**	
✪	▬	

C-form 25mm Screw bit

PZ : 0, 1, 2, 3 (3pc each)
Hex : 2, 2.5, 3, 4, 5, 6 (2pc each)
T : 10, 15, 20, 25, 27, 30, 40 (3pc each)
SL : 0.5x3, 0.5x4, 0.6x4.5, 0.8x5.5, 1.0x5.5, 1.2x6.5 (2pc each)
PH : 0, 1, 2 (3pc each), 3 (2pc each)

E-form 50mm Screw bit

T : 20, 25, 30 (1pc each)
PH : 1, 2, 3 (1pc each)

E-form Socket Wrench

5, 6, 7, 8, 9, 10mm (1pc each)

E-form magnetic bit holder

60mm (1pc each)



DF001DW

RM 353

In-Line Cordless Screwdriver
Pemutar Skru Tanpa Kord
充电式螺丝起子机



3.6V



- **Convenient to used even in narrow space**

Standard Equipment: Bit Set 81pcs, AC Adaptor, USB Cable

Fastening Capacities Keupayaan Pengancing 紧固能力	**Wood Screw: ø3.8 x 32mm (1/8"x1-1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 无负荷转速	**220**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最大紧固扭力	**Hard: 4.0N·m (35in.lbs.) Soft: 3.0N·m (27in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**6.0N·m (53 in.lbs.)**
Charging Time (hours) Masa Pengecasan 充电时间	**3 - 5**
Dimensions (L x W x H) Dimensi 体积	**Straight Style: 287x47x51mm (11-1/4"x1-7/8"x2") Pistol Style: 205x47x51mm (8-1/8"x1-7/8"x2")**
Net Weight Keberatan 净重	**0.36kg (0.8 lbs.)**
Work Amount (approx.) Jumlah Kerja 工作量	**200 pcs Wood Screw ø3.8x25mm (SPF plate)**

DTL062Z 9.5mm (3/8")

RM 1,218

Cordless Angle Impact Wrench
Perengkuh Impak Sudut Tanpa Kord
充电式角向冲击套筒扳手



14.4V



- **Compact angle head for easy access to bolts in tight places**

Standard Equipment: Belt Clip

• Z: Without Charger & Battery

Fastening Capacities Keupayaan Pengancing 紧固能力	**Standard Bolt: M4 - M12 (5/32" - 1/2") High Strength Bolt: M4 - M8 (5/32" - 5/16")**
Square Drive Skru Persegi 方形螺杆	**9.5mm (3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,000**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,000**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**60N·m**
Dimensions (L x W x H) Dimensi 体积	**387x78x97mm (15-1/4"x3-1/16"x3-13/16")**
Net Weight Berat Bersih 淨重	**1.4 - 1.8kg (3.0 - 4.1lbs.)**

DTW152Z 12.7mm (1/2")

RM 1,205

440 N·m

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手



14.4V



- **Compact and lightweight 4-pole motor**

Standard Equipment: Belt Clip

• Z: Without Charger & Battery

Fastening Capacities Keupayaan Pengancing 紧固能力	**Standard Bolt: M8 - M16 (5/16" - 5/8") High Strength Bolt: M8 - M12 (5/16" - 1/2")**
Square Drive Skru Persegi 方形螺杆	**12.7 mm (1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,400**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,200**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**200N·m (150ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**158x79x234mm (6-1/4"x3-1/8"x9-1/4")**
Net Weight Berat Bersih 淨重	**1.3 - 1.5kg (2.8 - 3.4lbs.)**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V 12V 9.6V

DF488DWE 13mm (1/2")
RM 765

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



18V G-Battery



- 16 clutch settings and drill mode for added fastening control

DF488D/HP488D VIDEO CLIP Models and specs may vary by country

Standard Equipment: (+)(-) Bit

- DWE: 1x Standard Charger, 2x 1.5Ah G-Battery

Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 36mm (1-7/16")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,400 | Low: 0 - 400**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**Hard: 42N·m (370 in.lbs)** **Soft: 24N·m (210 in.lbs)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**38N·m (340in.lbs.)**
Clutch Torque Setting Tetapan Pemutaran 扭转设置	**1 - 4N·m (9 - 35in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**221x83x240mm** **(8-3/4x3-1/4x9-1/2")**
Net Weight Berat Bersih 净重	**1.7kg (3.7lbs.)**

HP488DWE 13mm (1/2")
RM 855

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



18V G-Battery



- 16 clutch settings and drill mode for added fastening control

DF488D/HP488D VIDEO CLIP Models and specs may vary by country

Standard Equipment: (+)(-) Bit

- DWE: 1x Standard Charger, 2x 1.5Ah G-Battery

Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 36mm (1-7/16")** **Masonry: 13mm (1/2")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High: 0 - 21,000 | Low: 0 - 6,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,400 | Low: 0 - 400**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**Hard: 42N·m (370 in.lbs)** **Soft: 24N·m (210 in.lbs)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁紧扭力	**38N·m (340in.lbs.)**
Clutch Torque Setting Tetapan Pemutaran 扭转设置	**1 - 4N·m (9 - 35in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**239x83x240mm** **(9-3/8x3-1/4x9-1/2")**
Net Weight Berat Bersih 净重	**1.8kg (4.0lbs.)**

UM110DWYX 110mm (4-5/16")
RM 757

Cordless Grass Shear
Pemotong Rumput Tanpa Kord
充电式割草机



18V G-Battery

2 in 1



- 2 in 1: Both trimmer blade and shear blade can be attached

Standard Equipment: Shear Blade, Blade Cover, Storage Cover, Oil Vessel

- DWYX: 1x Standard Charger, 1x 1.5Ah G-Battery

Cutting Width Lebar Keratan 切割宽度	**Grass Shear Blade: 110mm (4-5/16")** **Hedge Trimmer Blade: 200mm (7-7/8")**
Depth Adjustment Pelarasan Kedalaman 深度调整	**15mm (9/16") | 20mm (13/16") | 25mm (1")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**2,500**
Dimensions (L x W x H) Dimensi 体积	**331x120x130mm** **(13x4-3/4x5-1/8")**
Net Weight Berat Bersih 净重	**1.4 - 1.5kg (3.1 - 3.3lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**65min with BL1815G**

6271DWE 10mm (3/8")
RM 745

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



12V Ni-Cd Battery



- All metal gear construction ensures high transmission durability

Sementara stok masih ada 售完即止 WHILE STOCK LAST

Standard Equipment: (+)(-) Bit

- DWE: 1x Standard Charger, 2x 1.3Ah Ni-Cd Battery

Capacity Kapasiti 能力	**Steel: 10mm (3/8")** **Wood: 21mm (13/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0-1,300** **Low: 0-400**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力	**Hard: 30N·m/ Soft: 18N·m**
Dimensions (L x W x H) Dimensi 体积	**192x95x240mm** **(7-9/16"x3-3/4"x9-1/2")**
Net Weight Berat Bersih 净重	**1.5kg (3.4lbs.)**

4190DW 80mm (3-1/8")
RM 1,765

Cordless Cutter
Pemotong Tanpa Wayar
充电式切割机



9.6V Ni-Cd Battery



- Fast and easy glass and ceramic tile cutting

Sementara stok masih ada 售完即止 WHILE STOCK LAST

Standard Equipment: Diamond Wheel (792296-4), Hex Wrench

- DW: 1x Standard Charger, 1x 1.3Ah Ni-Cd Battery

Blade Diameter Diameter Bilah 锯片直径	**80mm (3-1/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 18mm (11/16")** **45°: 16mm (5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**1,000**
Overall Length Dimensi 体积	**313mm (12-3/8")**
Net Weight Berat Bersih 净重	**1.9kg (4.2lbs.)**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

36V Li-ion Ah 12 2.6 2.2

BUH550RD | BUH550Z | UH550DWB 550mm (21-5/8")
RM 3,370 | RM 1,557 | RM 3,113

442 m/s²

Cordless Hedge Trimmer
Pemangkas Tanaman Pagar Tanpa Kord
充电式篱笆树剪



36V



- **5-Position rotating rear handle for increased comfort during vertical and angle trimming**

Standard Equipment: Blade Cover

- RD: 1x 36V Rapid Charger (DC36RA), 1x 36V 2.6Ah Battery (BL3626)
- DWB: 1x 36V Standard Charger (DC36WA), 1x 36V 2.2Ah Battery (BL3622A)
- Z: Without Charger & Battery

Blade Length Panjang bilah 刀片长度	**550mm (21-5/8")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**2,000 - 3,600**
Tooth Spacing Selang Gigi 牙齿间隔	**36mm (1-7/16")**
Dimensions (L x W x H) Dimensi 体积	**1,070x220x190mm (42"x8-5/8"x7-1/2")**
Net Weight Keberatan 净重	**5.1kg (11.2lbs.)**

BUH650RD | BUH650Z | UH650DWB 650mm (25-1/2")
RM 3,352 | RM 1,732 | RM 3,095

442 m/s²

Cordless Hedge Trimmer
Pemangkas Tanaman Pagar Tanpa Kord
充电式篱笆树剪



36V



- **5-Position rotating rear handle for increased comfort during vertical and angle trimming**


Standard Equipment: Blade Cover

- RD: 1x 36V Rapid Charger (DC36RA), 1x 36V 2.6Ah Battery (BL3626)
- DWB: 1x 36V Standard Charger (DC36WA), 1x 36V 2.2Ah Battery (BL3622A)
- Z: Without Charger & Battery

Blade Length Panjang bilah 刀片长度	**650mm (25-1/2")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**2,000 - 3,600**
Tooth Spacing Selang Gigi 牙齿间隔	**36mm (1-7/16")**
Dimensions (L x W x H) Dimensi 体积	**1,150x220x190mm (45-1/4"x8-5/8"x7-1/2")**
Net Weight Keberatan 净重	**5.2kg (11.5lbs.)**

BUN490RD
RM 5,998

Cordless Pole Hedge Trimmer
Pemangkas Tanaman Pagar Tinggi Tanpa Kord
充电式高枝篱笆树剪



36V



- **Can be folded in the 180° position for easy transport and storage**

Standard Equipment: Band Assembly, Wrench, Accessory Bag


- RD: 1x 36V Rapid Charger (DC36RA), 1x 36V 2.6Ah Battery (BL3626)

BL MOTOR

Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**High:0 - 4,000 | Low: 0 - 2,800**
Tooth Spacing Selang Gigi 牙齿间隔	**35mm (1-3/8")**
Dimensions (L x W x H) Dimensi 体积	**2,595x226x211mm (100-3/16"x8-7/8"x8-5/16")**
Net Weight Keberatan 净重	**6.9kg (15.2 - 15.3lbs.)**

BBC231UZ | BC231UDWBE
RM 3,542 | RM 8,553

Cordless Brushcutter
Pemotong Rumput Tanpa Kord
充电式割草机



36V



BC231UDWBE Sementara stok masih ada 售完即止 WHILE STOCK LAST

- **Low noise level and zero emissions for operator comfort**

Standard Equipment: Blade, Guard, Shoulder Harness with Double Shoulder Strap, Wrenches


- UWBE: 1x 36V Standard Charger (DC36WA), 2x 36V 2.2Ah Battery (BL3622A)
- UZ: Without Charger & Battery

BL MOTOR

No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0-7,300 | Low: 0-5,300**
Spindle Size Saiz Spindel 主轴尺寸	**M10 x 1.25LH**
Dimensions (L x W x H) Dimensi 体积	**1,880x620x490mm (74"x24-3/8"x19-1/4")**
Net Weight Keberatan 净重	**7.1kg (15.7lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 30 min with BL3626 Metal blade with load**

BML360Z (STEXBML360)
RM 399.10

Cordless Fluorescent Light
Lampu Suluh Tanpa Kord
充电式工作灯



36V



- **Wide and bright illumination**

- Z: Without Charger & Battery

Dimensions (L x W x H) Dimensi 体积	**283x128x203mm (11-1/8"x5"x8")**
Net Weight Berat Bersih 净重	**2.3kg (5.1lbs.)**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

Cordless Coffee Maker

Mesin Kopi Tanpa Kord 充电式咖啡机

Cordless Fan

Kipas Tanpa Kord 充电式风扇

Job Site Radio

Radio Tanpa Kord 充电式收音机

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5





DMR300 18V / 12Vmax / AC
RM 2,297

Job Site Charger Radio
Radio Tanpa Kord
充电式收音机



AC ALTERNATING CURRENT

- Clear sound quality can be enjoyed even during battery charging

NEW BARU 新



Standard Equipment: AC Adaptor, AA Battery

- Without Charger & Battery

Bluetooth

Frequency Band Julat Kekerapan 频率范围	**FM: 87.5 - 108MHz** **AM: 522 - 1,710kHz**
Speaker Size Saiz Speaker 扬声器尺寸	**Dia. 89 mm x2**
Bluetooth Bluetooth 蓝牙连接	**Version: 5.0** **Profile: A2DP | SCMS-T** **Supported Codec: SBC** **Max Transmission Range (Optimum): 10m (33ft)** **Max Transmission Range (Possible): 30m (98ft)** **Transmission Power Class: 2**
Dimensions (L x W x H) Dimensi 体积	**268x185x427mm** **(10-1/2x7-1/4x16-3/4")**
Net Weight Berat Bersih 净重	**6.1 - 6.6kg (13.5 - 14.6lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**24.7 hrs with BL1860B**

DMR114 18V / 12Vmax / AC
RM 1,842

Job Site Radio
Radio Tanpa Kord
充电式收音机



AC ALTERNATING CURRENT

- Equipped with equalizer for 7 selectable sound modes



Standard Equipment: AC Adaptor

- Without Charger & Battery

Bluetooth

Frequency Band Julat Kekerapan 频率范围	**FM: 87.5 - 108MHz** **AM: 522 - 1,710kHz**
Speaker Size Saiz Speaker 喇叭尺寸	**Sides: Ø63.5mm x2** **Bottom: Ø101.6mm**
Bluetooth Bluetooth 蓝牙连接	**Version: 5.0** **Profile: A2DP | SCMS-T | AVRCP** **Supported Codec: SBC / AAC** **Max Transmission Range:** **(Optimum): 10m (33ft) | (Possible): 30m (98ft)** **Transmission Power Class: 2** **Compatible Bluetooth Profile: A2DP**
Dimensions (L x W x H) Dimensi 体积	**268x164x295mm** **(10-1/2"x6-1/2"x11-5/8")**
Net Weight Berat Bersih 净重	**5.1 - 5.6kg (11.3 - 12.3lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**17 hrs with BL1850B**

DMR203 18V / 12Vmax / AC
RM 1,260

Cordless Job Site Speaker
Pembesar Suara Tanpa Kord
充电式音箱



AC ALTERNATING CURRENT

- Equipped with equalizer for 7 selectable sound modes



Standard Equipment: AC Adaptor

- Without Charger & Battery

Bluetooth

Speaker Size Saiz Speaker 喇叭尺寸	**Woofer: Ø101.6mm** **Tweeter: Ø36mm** **Passive Radiator: Ø89mm**
Bluetooth Bluetooth 蓝牙连接	**Version: 5.0** **Profile: A2DP | SCMS-T | AVRCP** **Supported Codec: SBC** **Max Transmission Range: 10m (33ft)** **Max Transmission Range (Possible): 30m (100ft)**
Dimensions (L x W x H) Dimensi 体积	**217x206x199mm** **(8-1/2"x8-1/8"x7-7/8")**
Net Weight Berat Bersih 净重	**2.7 - 3.4kg (6.0 - 7.5lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**29 hrs with BL1850B (AUX-IN)**

Product Comparison List 18V 12V max

Senarai Perbandingan Produk 产品对比表

Run time (hrs)	Up to: 24.7 with BL1860B	DMR300	Up to: 17 with BL1850B	DMR114	Up to: 26 Bluetooth: with BL1850B	DMR203
Bluetooth	●		●		●	
Net weight	6.1 - 6.6kg (13.5 - 14.6lbs.)		5.1 - 5.6kg (11.3 - 12.3lbs.)		2.7 - 3.4kg (6.0 - 7.5lbs)	


***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT 12Vmax CXT Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

Cordless Fan

Kipas Tanpa Kord 充电式风扇

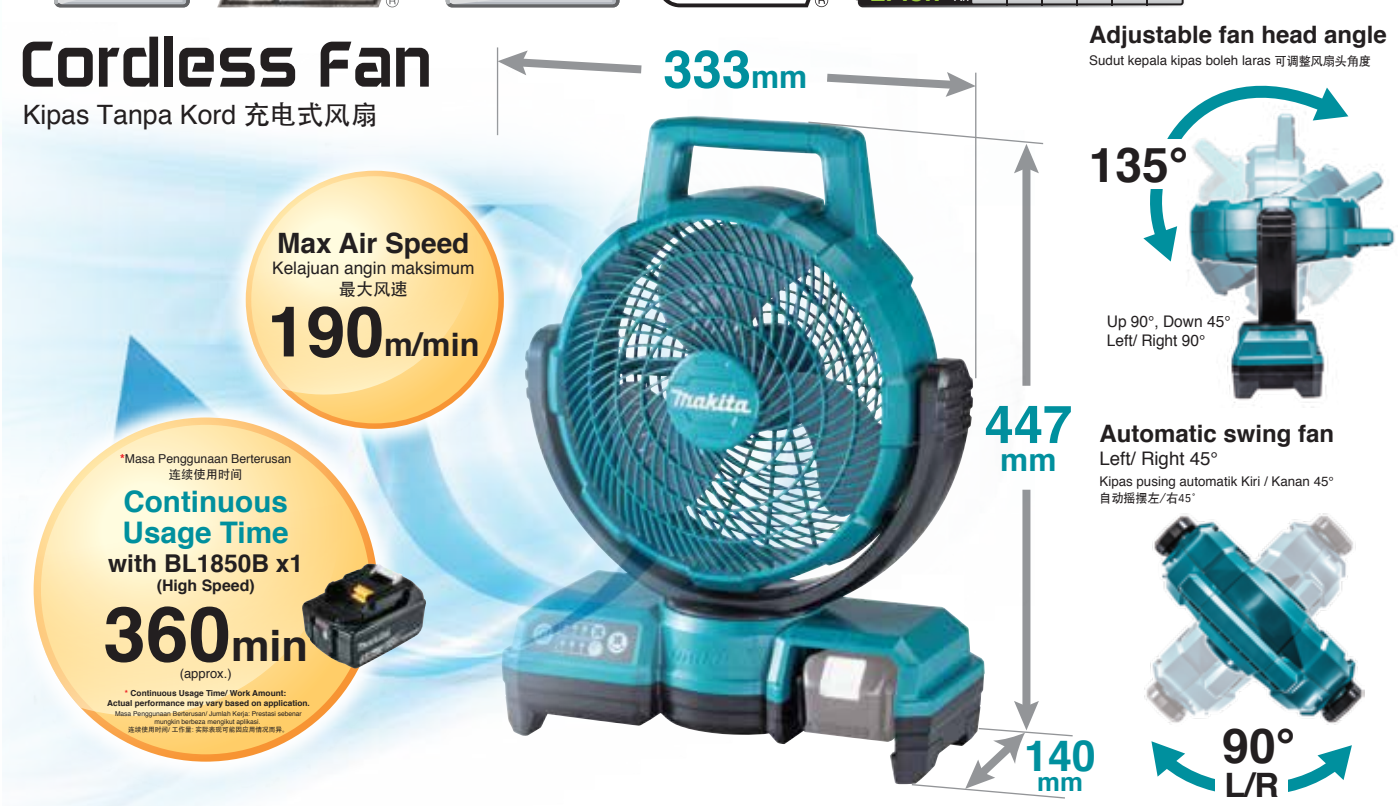

Adjustable fan head angle

Sudut kepala kipas boleh laras 可调整风扇头角度

Up 90°, Down 45°
Left/ Right 90°

Automatic swing fan

Left/ Right 45°

Kipas pusing automatik Kiri / Kanan 45°
自动摇摆左/右45°

DCF203Z 18V / 14.4V

RM 1,290

Cordless Fan
Kipas Tanpa Kord
充电式风扇



- Cordless automatic swing fan

DCF203 VIDEO CLIP Models and specs may vary by country

- Z : Without Charger & Battery




Max Air Velocity Kelajuan Angin Maksimum 最大风速	**High: 190m/min | Med: 150m/min | Low: 120m/min**
Air Flow Aliran Udara 空气流量	**High: 8.2m³/min | Med: 6.5m³/min | Low: 5.2m³/min**
Dimensions (L x W x H) Dimensi 体积	**140x333x447mm (5-1/2"x13"x16-1/2")**
Net Weight Berat Bersih 净重	**1.9 - 2.6kg (4.2 - 5.6lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 1,010 min | Med: 650 min | High: 410 min with BL1860B**

DCF102Z 18V / 14.4V

RM 678

Cordless Fan
Kipas Tanpa Kord
充电式风扇



- Automatically Swings 45° L/R

- Z : Without Charger & Battery



Air Flow Aliran Udara 空气流量	**High: 4.6L/min | Med: 3.8L/min | Low: 3.0L/min**
Dimensions (L x W x H) Dimensi 体积	**185x272x284mm (7-1/4"x10-3/10"x11-1/8")**
Net Weight Berat Bersih 净重	**1.3 - 2.0kg (2.9 - 4.4lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 1,270 min | Mid: 705 min | High: 575 min with BL1860B**

CF101DZ 12Vmax

RM 643

Cordless Fan
Kipas Tanpa Kord
充电式风扇



- Automatically Swings 45° L/R

- Z: Without Charger & Battery



Air Flow Aliran Udara 空气流量	**High: 4.6L/min | Med: 3.8L/min | Low: 3.0L/min**
Dimensions (L x W x H) Dimensi 体积	**185x260x284mm (7-1/4"x10-1/4"x11-1/8")**
Net Weight Berat Bersih 净重	**1.3 - 1.7kg (2.8 - 3.8lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low - 315min | Med - 190min | High - 135min with BL1021B**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® 12Vmax CXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DCF201Z 18V
RM 562

Cordless Fan
Kipas Tanpa Kord
充电式风扇





- Strong enough to create a comfortable work environment under hot weather

Dimensions (L x W x H) Dimensi 体积	**263x330x523mm (10-3/8"x13"x20-5/8")**
Net Weight Berat Bersih 淨重	**2.5 - 2.9kg (5.5 - 6.3lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 330min | High: 165min with BL1850B**

- Z : Without Charger & Battery

CF100DZ 12Vmax / AC
RM 487

Cordless Fan
Kipas Tanpa Kord
充电式风扇



AC ALTERNATING CURRENT



- Compact Size Allows Installation Even in Small Spaces

Standard Equipment: AC Adaptor

- Z: Without Charger & Battery

Dimensions (L x W x H) Dimensi 体积	**148x260x252mm (5-7/8x10-1/4x9-7/8")**
Net Weight Berat Bersih 淨重	**1.2 - 1.4kg (2.7 - 3.1lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low - 315min | Med - 190min | High - 135min with BL1021B**

Product Comparison List 18V 12V max

Senarai Perbandingan Produk 产品对比表

	DCF203	DCF102	CF101D	DCF201	CF100D
					
Run time (min.)	**High: 360 | Med: 580 | Low: 960** with BL1850B	**High: 480 | Med: 585 | Low: 1060** with BL1850B	**High: 275 | Med: 380 | Low: 630** with BL1041B	**High: 180 | Low: 400** with BL1850B	**High: 275 | Med: 380 | Low: 630** with BL1041B
Max air speed (m/ min)	**190**	**180**	**180**	**120**	**180**
Fan size (mm)	**235**	**180**	**180**	**250**	**180**
Automatic swing fan	●	●	●		
Net weight	**1.9 - 2.6 kg (4.2 - 5.6 lbs.)**	**1.3 - 2.0 kg (2.9 - 4.4 lbs.)**	**1.3 - 1.7 kg (2.8 - 3.8 lbs.)**	**2.5 - 2.9 kg (5.5 - 6.3 lbs.)**	**1.2 - 1.4 kg (2.7 - 3.1 lbs.)**

ADP05 (AUBADP05) 18V
RM 161

Adapter for USB
Penyesuai untuk USB
USB适配器





- As a charger for smart phones

USB Port Soket USB USB插口位置	**2 (A type)**
Dimensions (L x W x H) Dimensi 体积	**102x72x43mm (4"x2-13/16"x1-11/16")**
Net Weight Berat Bersih 淨重	**0.46 - 0.71kg (1.0 - 1.6lbs)**
Work Amount (approx.) Jumlah Kerja 工作量	**10times with BL1850B** **Charging Iphone 6S (1715 mA·h)**

- Without Charger & Battery

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT 12Vmax CXT Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

ADP06 (AUAADP06) RM 162.20 | ADP08 (AUAADP08) 12Vmax RM 135.90

Adapter for USB
Penyesuai untuk USB
USB适配器



- As a charger for smart phones

ADP06



ADP08



- Without Charger & Battery

Battery Bateri 电池	12Vmax 1.5Ah, 2.0Ah, 4.0Ah
USB Port Soket USB USB插口位置	1 (type A)
Devices Peralatan 设备	iOS & Android
Dimensions (L x W x H) Dimensi 体积	80x53x38mm ADP06 (3-1/8"x2-1/16"x1-1/2") 80x53x28mm ADP08 (3-1/8"x2-1/16"x1-1/8")
Net Weight Berat Bersih 淨重	0.27 - 0.44kg (0.6 - 1.0lbs)
Work Amount (approx.) Jumlah Kerja 工作量	1 time charges with BL1021B ADP06 Charging Iphone 7 (1960 mA·h) 1 time charges with BL1021B ADP08 Charging Iphone 7 (1960 mA·h)

Cordless Coffee Maker

Mesin Kopi Tanpa Kord 充电式咖啡机

18V LITHIUM-ION 18V Litium-ion 18V锂离子
12Vmax LITHIUM-ION 12V Litium-ion 12V锂离子

Carry Handle
for easy transport
Pemegang mudah dibawa
手柄便于携带

Water Tank Capacity
Kapasiti Tangki Air
水箱容量
240mL

Capacity of Cup



Makita Cafe pod **120mL** | Ground coffee (6.5g) **160mL**

Dedicated Cup Capacity
240mL

Cover is slide left and right to protect the empty port when a battery is inserted
Tutup adalah gelongsor kiri dan kanan untuk melindungi port kosong apabila bateri dimasukkan
左右滑动保护盖，以在插入电池时保护空的端口

Makita genuine cafe pods are prepared 20pcs/box



Brazil
Fragrant bitter & deep flavor

Mocha
Sweet scent & mild taste

Kilimanjaro
Aftertaste with bitter sweet & sharpness

DCM501Z 18V / 12Vmax RM 848

Cordless Coffee Maker
Mesin Kopi Tanpa Kord
充电式咖啡机



- Large tank capacity of 240 mL



Standard Equipment: Mug, Measuring Spoon

- Z : Without Charger & Battery

Water Tank Capacity Dimensi 体积	240mL
Compatible Cafe Pod Type Berat Bersih 淨重	60mm
Dimensions (L x W x H) Masa Penggunaan Berterusan 连续使用时间	243x187x218mm (9-9/16"x7-3/8"x8-9/16")
Net Weight	1.9 - 2.2kg (4.1 - 4.8lbs.)
Continuous Usage Time (approx.)	4cups 160mL Coffee with BL1860B

DCM501 VIDEO CLIP Models and specs may vary by country

***All list price shown are for reference only (exclude SST).**
*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT 12Vmax CXT Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

Cordless Fan Jacket

Jaket Kipas Tanpa Kord 充电式风扇外套



Model No.	Battery Holder
DFJ211 DFJ216 DFJ300 DFJ416 DFJ311 DFV214A DFJ400 DFV210	18V LITHIUM-ION **Battery Holder Set** Part No. 198732-2
DFJ411 FJ502D DFJ212 FJ203D DFJ213 FJ301D DFJ214 FJ401D	12Vmax LITHIUM-ION **Battery Holder Set** Part No. 198731-4 (GM00001604)
DCV202 DCB200	18V LITHIUM-ION **Battery Holder Set** Part No. YL00000004
DCV202 CB100D	12Vmax LITHIUM-ION **Battery Holder Set** Part No. YL00000003
DFV214A	18V LITHIUM-ION **Battery Holder Set** Part No. TD00000111

Max Air Flow
Aliran Udara Maksimum
最大空气流量
2.2 m³/min
(Turbo Mode)

Jacket Size

saiz Jaket 夹克尺寸



Fan Vest	size (in cm)	S	M	L	XL	2XL	3XL
DFV210 DFV214A	Length	67	69	71	72	73	74
	Shoulder	43	45	47	49	51	53
	Chest	113	118	123	128	133	138
	Waist	107	112	117	122	127	132

Heated Vest	size (in cm)	S	M	L	XL	2XL	3XL
DCV202	Length	72	73	74	75	76	77
	Shoulder	47.5	49.5	51.5	53.5	55.5	57.5
	Chest	114	120	126	132	138	144
	Waist	116	122	128	134	140	146

Fan Jacket	size (in cm)	S	M	L	XL	2XL	3XL
DFJ212	Length	66	68	70	71	72	73
	Shoulder	44	46	48	50	52	54
	Sleeve*	87	90	93	95	97	99
	Chest	117	122	127	132	137	142
	Waist	111	116	121	126	131	136
DFJ213	Length	65	67	69	70	71	72
	Shoulder	47	49	51	53	55	57
	Sleeve	62	64	66	67	68	69
	Chest	117	122	127	132	137	142
	Waist	103 ~ 111	108 ~ 116	113 ~ 121	118 ~ 126	123 ~ 131	128 ~ 136
DFJ214 DFJ214O	Length	68	70	72	73	74	75
	Shoulder	47	49	51	53	55	57
	Sleeve	62	64	66	67	68	69
	Chest	117	122	127	132	137	142
	Waist	103 ~ 111	108 ~ 116	113 ~ 121	118 ~ 126	123 ~ 131	128 ~ 136
DFJ216	Length	67	69	71	72	73	74
	Shoulder	47	49	51	53	55	57
	Sleeve	62	64	66	67	68	69
	Chest	119	124	129	134	139	144
	Waist	89 ~ 113	94 ~ 118	99 ~ 123	104 ~ 128	109 ~ 133	114 ~ 138
DFJ416	Length	65	67	69	70	71	72
	Shoulder	47	49	51	53	55	57
	Sleeve	62	64	66	67	68	69
	Chest	119	124	129	134	139	144
	Waist	103 ~ 113	108 ~ 118	113 ~ 123	118 ~ 128	123 ~ 133	128 ~ 138
DFJ211 DFJ311 DFJ411	Length	68	70	72	74	76	78
	Shoulder	56.5	59	61.5	64	66.5	69
	Sleeve	58	60	62	64	66	68
	Chest	126	131	136	141	146	151
	Waist	87 ~ 113	92 ~ 113	97 ~ 113	102 ~ 133	107 ~ 138	112 ~ 143

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT 12Vmax CXT Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DFJ216ZL 18V / 12Vmax
RM 710

Cordless Fan Jacket
Jaket Kipas Tanpa Kord
充电式风扇夹克





- Equipped with Two Flat Fan Units with BL Motor for Increased Comfort

- Without Charger & Battery

BL MOTOR

Air Flow Settings Tetapan Aliran Udara 空气流量设置	**Turbo | High | Medium | Low**
Air Flow Aliran Udara 空气流量	**Turbo: 2.2m³/min | High: 2.1m³/min | Med: 1.7m³/min | Low: 1.5m³/min**
Size Saiz 尺寸	**L**
Pockets Poket 口袋	**5**
Net Weight Berat Bersih 净重	**0.23kg (N/A lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 27.5 hrs | Medium : 20 hrs | High: 11 hrs with BL1850B**

Polyester
- High repellency fabric

DFJ416ZL 18V / 12Vmax
RM 943

Cordless Fan Jacket
Jaket Kipas Tanpa Kord
充电式风扇夹克





- Equipped with Two Flat Fan Units with BL Motor for Increased Comfort

- Without Charger & Battery

BL MOTOR

Air Flow Settings Tetapan Aliran Udara 空气流量设置	**Turbo | High | Medium | Low**
Air Flow Aliran Udara 空气流量	**Turbo: 2.2m³/min | High: 2.1m³/min | Med: 1.7m³/min | Low: 1.5m³/min**
Size Saiz 尺寸	**L**
Pockets Poket 口袋	**5**
Net Weight Berat Bersih 净重	**0.23kg (N/A lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 27.5 hrs | Medium : 20 hrs | High: 11 hrs with BL1850B**

Polyester + Titanium coating
- Reflects infrared rays and ultraviolet rays

DFJ211ZM | DFJ211ZL | DFJ211ZXL 18V / 12Vmax
RM 762 | RM 762 | RM 762

Cordless Fan Jacket
Jaket Kipas Tanpa Kord
充电式风扇外套





- Equipped with Two Flat Fan Units with BL Motor for Increased Comfort

- Without Charger & Battery

BL MOTOR

Air Flow Settings Tetapan Aliran Udara 空气流量设置	**Turbo | High | Medium | Low**
Air Flow Aliran Udara 空气流量	**Turbo: 2.2m³/min | High: 2.1m³/min | Med: 1.7m³/min | Low: 1.5m³/min**
Size Saiz 尺寸	**M | L | XL**
Pockets Poket 口袋	**5**
Net Weight Berat Bersih 净重	**0.41kg (0.9lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 29 hrs | Medium: 21 hrs | High: 12 hrs with BL1850B**

Polyester **For general work**
Untuk kerja am | 用于一般工作
- Superior moisture permeability and water repellent

DFJ311ZM | DFJ311ZL | DFJ311ZXL 18V / 12Vmax
RM 800 | RM 800 | RM 800

Cordless Fan Jacket
Jaket Kipas Tanpa Kord
充电式风扇外套





- Equipped with Two Flat Fan Units with BL Motor for Increased Comfort

- Without Charger & Battery

BL MOTOR

Air Flow Settings Tetapan Aliran Udara 空气流量设置	**Turbo | High | Medium | Low**
Air Flow Aliran Udara 空气流量	**Turbo: 2.2m³/min | High: 2.1m³/min | Med: 1.7m³/min | Low: 1.5m³/min**
Size Saiz 尺寸	**M | L | XL**
Pockets Poket 口袋	**5**
Net Weight Berat Bersih 净重	**0.52kg (1.1lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 29 hrs | Medium: 21 hrs | High: 12 hrs with BL1850B**

Cotton **For welding/ grinding work**
Untuk kerja kimpalan/ pengisaran | 用于焊接/ 打磨工作
- Strong in heat and sparks

DFJ411ZM | DFJ411ZL | DFJ411ZXL 18V / 12Vmax
RM 965 | RM 965 | RM 965

Cordless Fan Jacket
Jaket Kipas Tanpa Kord
充电式风扇外套





- Equipped with Two Flat Fan Units with BL Motor for Increased Comfort

- Without Charger & Battery

BL MOTOR

Air Flow Settings Tetapan Aliran Udara 空气流量设置	**Turbo | High | Medium | Low**
Air Flow Aliran Udara 空气流量	**Turbo: 2.2m³/min | High: 2.1m³/min | Med: 1.7m³/min | Low: 1.5m³/min**
Size Saiz 尺寸	**M | L | XL**
Pockets Poket 口袋	**5**
Net Weight Berat Bersih 净重	**0.49kg (1.1lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 29 hrs | Medium: 21 hrs | High: 12 hrs with BL1850B**

Polyester + Titanium coating **For outdoor work**
Untuk kerja luaran | 用于户外工作
- Reflective in ultraviolet rays and infrared rays

***All list price shown are for reference only (exclude SST).**
*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® 12Vmax CXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

FJ502DZM | FJ502DZL | FJ502DZLL 18V / 12Vmax

RM 1,278 | RM 1,278 | RM 1,278

Cordless Fan Jacket

Jaket Kipas Tanpa Kord
充电式风扇外套

- Equipped with Two Flat Fan Units with BL Motor for Increased Comfort

M / L / LL



- Without Charger & Battery

BL MOTOR

Air Flow Settings Tetapan Aliran Udara 空气流量设置	**Turbo | High | Medium | Low**
Air Flow Aliran Udara 空气流量	**Turbo: 2.2m³/min | High: 2.1m³/min | Med: 1.7m³/min | Low: 1.5m³/min**
Size Saiz 尺寸	**M | L | LL**

DFJ214OM | DFJ214OL | DFJ214OXL | DFJ214O2XL 18V / 12Vmax

RM 1,202 | RM 1,202 | RM 1,202 | RM 1,202

Cordless Fan Jacket

Jaket Kipas Tanpa Kord
充电式风扇夹克

- Equipped with Two Flat Fan Units with BL Motor for Increased Comfort

M / L / XL / 2XL



- Without Charger & Battery

BL MOTOR

Air Flow Settings Tetapan Aliran Udara 空气流量设置	**Turbo | High | Medium | Low**
Air Flow Aliran Udara 空气流量	**Turbo: 2.2m³/min | High: 2.1m³/min | Med: 1.7m³/min | Low: 1.5m³/min**
Size Saiz 尺寸	**M | L | XL | 2XL**
Pockets Poket 口袋	**5**
Net Weight Berat Bersih 淨重	**0.54kg (1.2lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 27.5 hrs | Medium : 20 hrs | High: 11 hrs with BL1850B**

Polyester

- water repellency, antistatic fabric

DFJ214ZM | DFJ214ZL | DFJ214ZXL 18V / 12Vmax

RM 1,202 | RM 1,202 | RM 1,202

Cordless Fan Jacket

Jaket Kipas Tanpa Kord
充电式风扇外套



- Equipped with Two Flat Fan Units with BL Motor for Increased Comfort

M / L / XL



- Without Charger & Battery

BL MOTOR

Air Flow Settings Tetapan Aliran Udara 空气流量设置	**Turbo | High | Medium | Low**
Air Flow Aliran Udara 空气流量	**Turbo: 2.2m³/min | High: 2.1m³/min | Med: 1.7m³/min | Low: 1.5m³/min**
Size Saiz 尺寸	**M | L | XL**
Pockets Poket 口袋	**5**
Net Weight Berat Bersih 淨重	**0.54kg (1.2lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 27.5 hrs | Medium : 20 hrs | High: 11 hrs with BL1850B**

Polyester

- water repellency, antistatic fabric

DFJ212ZM | DFJ212ZL | DFJ212ZXL 18V / 12Vmax

RM 1,072 | RM 1,072 | RM 1,072

Cordless Fan Jacket

Jaket Kipas Tanpa Kord
充电式风扇外套



- Equipped with Two Flat Fan Units with BL Motor for Increased Comfort

M / L / XL



- Without Charger & Battery

BL MOTOR

Air Flow Settings Tetapan Aliran Udara 空气流量设置	**Turbo | High | Medium | Low**
Air Flow Aliran Udara 空气流量	**Turbo: 2.2m³/min | High: 2.1m³/min | Med: 1.7m³/min | Low: 1.5m³/min**
Size Saiz 尺寸	**M | L | XL**
Pockets Poket 口袋	**5**
Net Weight Berat Bersih 淨重	**0.43kg (0.9lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 29 hrs | Medium : 21 hrs | High: 12 hrs with BL1850B**

Polyester

- High repellency fabric

DFJ213ZM | DFJ213ZL | DFJ213ZXL 18V / 12Vmax

RM 1,017 | RM 1,017 | RM 1,017

Cordless Fan Jacket

Jaket Kipas Tanpa Kord
充电式风扇外套



- Equipped with Two Flat Fan Units with BL Motor for Increased Comfort

M / L / XL



- Without Charger & Battery

BL MOTOR

Air Flow Settings Tetapan Aliran Udara 空气流量设置	**Turbo | High | Medium | Low**
Air Flow Aliran Udara 空气流量	**Turbo: 2.2m³/min | High: 2.1m³/min | Med: 1.7m³/min | Low: 1.5m³/min**
Size Saiz 尺寸	**M | L | XL**
Pockets Poket 口袋	**5**
Net Weight Berat Bersih 淨重	**0.54kg (1.2lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 29 hrs | Medium: 21 hrs | High: 12 hrs with BL1850B**

Polyester

- Stretchable fabric

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT 12Vmax CXT Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DFV214A01 | DFV214A02 18V / 12Vmax

DFV214A01 RM 730 | DFV214A02 RM 730

Cordless Fan Vest
Jaket Kipas Tanpa Kord
充电式风扇背心



- Two flatter fan units, higher voltage and redesigned air flow for increased air volume and comfort

- Without Charger & Battery

BL MOTOR XPT



DFV214A01 (S-L)
DFV214A02 (XL-3L)

Air Flow Settings Tetapan Aliran Udara 空气流量设置	**Turbo | High | Medium | Low**
Size Saiz 尺寸	**01: S-L | 02: XL-3L**
Pockets Poket 口袋	**4**
Net Weight Berat Bersih 净重	**0.23kg**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 68 hrs | Medium : 29.5 hrs | High: 16 hrs | Max: 10 hrs with BL1860B**

Polyester
- High repellency fabric

DFV210ZM | DFV210ZL | DFV210ZXL | DFV210Z2XL 18V / 12Vmax

DFV210ZM RM 873 | DFV210ZL RM 873 | DFV210ZXL RM 873 | DFV210Z2XL RM 873

Cordless Fan Vest
Jaket Kipas Tanpa Kord
充电式风扇背心



- Equipped with Two Flat Fan Units with BL Motor for Increased Comfort

- Without Charger & Battery

BL MOTOR



M / L / XL / 2XL


Air Flow Settings Tetapan Aliran Udara 空气流量设置	**Turbo | High | Medium | Low**
Air Flow Aliran Udara 空气流量	**Turbo: 2.2m³/min | High: 2.1m³/min | Med: 1.7m³/min | Low: 1.5m³/min**
Size Saiz 尺寸	**M | L | XL**
Pockets Poket 口袋	**5**
Net Weight Berat Bersih 净重	**0.38kg (0.8lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 29 hrs | Medium: 21 hrs | High: 12 hrs with BL1850B**

Polyester
- High repellency fabric

FJ203DZL | FJ203DZLL 18V / 12Vmax

FJ203DZL RM 760 | FJ203DZLL RM 760

Cordless Fan Jacket
Jaket Kipas Tanpa Kord
充电式风扇外套



- Powerful fan provides air flow to keep you cool

Standard Equipment: Fan Hook

- Without Charger & Battery



L / LL

Air Flow Settings Tetapan Aliran Udara 空气流量设置	**Turbo | High | Medium | Low**
Air Flow Aliran Udara 空气流量	**Turbo: 1.4m³/min | High: 1.2m³/min | Med: 1.0m³/min | Low: 0.8m³/min**
Size Saiz 尺寸	**L | XL | LL**
Pockets Poket 口袋	**5**
Net weight Berat Bersih 净重	**1.5 - 1.9kg (3.3 - 4.1lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 28 hrs | Medium: 20 hrs | High: 11 hrs with BL1850B**

Polyester **For general work**
Untuk kerja am | 用于一般工作
- Superior moisture permeability and water repellent

DFJ300ZXL | FJ301DZM | FJ301DZL | FJ301DZLL 18V / 12Vmax

DFJ300ZXL RM 745 | FJ301DZM RM 797 | FJ301DZL RM 797 | FJ301DZLL RM 797

Cordless Fan Jacket
Jaket Kipas Tanpa Kord
充电式风扇外套



- 100% cotton - hardly-burned, suitable for welding/ grinding

Standard Equipment: Fan Hook

- Without Charger & Battery



DFJ300ZXL | FJ301DZM / L / LL

Air Flow Settings Tetapan Aliran Udara 空气流量设置	**Turbo | High | Medium | Low**
Air Flow Aliran Udara 空气流量	**Turbo: 1.4m³/min | High: 1.2m³/min | Med: 1.0m³/min | Low: 0.8m³/min**
Size Saiz 尺寸	**DFJ300: XL FJ301: M | L | LL**
Pockets Poket 口袋	**5**
Net weight Berat Bersih 净重	**1.5 - 1.9kg (3.3 - 4.1lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 29 hrs | Medium: 21 hrs | High: 12 hrs with BL1850B**

Cotton **For welding/ grinding work**
Untuk kerja kimpalan/ pengisaran | 用于焊接/ 打磨工作
- Strong in heat and sparks

DFJ400ZXL | FJ401DZL | FJ401DZLL | FJ401DZ3L 18V / 12Vmax

DFJ400ZXL RM 848 | FJ401DZL RM 970 | FJ401DZLL RM 970 | FJ401DZ3L RM 970

Cordless Fan Jacket
Jaket Kipas Tanpa Kord
充电式风扇外套



- Heavy-duty shoulder pad lightens the burden on a shoulder and prevents torn while carrying reinforcing bars

Standard Equipment: Fan Hook

- Without Charger & Battery



DFJ400ZXL | FJ401DZL / LL / 3L

Air Flow Settings Tetapan Aliran Udara 空气流量设置	**Turbo | High | Medium | Low**
Air Flow Aliran Udara 空气流量	**Turbo: 1.4m³/min | High: 1.2m³/min | Med: 1.0m³/min | Low: 0.8m³/min**
Size Saiz 尺寸	**DFJ400: XL FJ401: L | LL | 3L**
Pockets Poket 口袋	**5**
Net weight Berat Bersih 净重	**1.5 - 1.9kg (3.3 - 4.1lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 28 hrs | Medium: 20 hrs | High: 11 hrs with BL1850B**

Polyester + Titanium processing **For outdoor work**
Untuk kerja luaran | 用于户外工作
- Reflective in ultraviolet rays and infrared rays

***All list price shown are for reference only (exclude SST).**
*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT 12Vmax CXT Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DFJ201ZM | DFJ201ZL | DFJ201ZXL 18V

RM 710 | RM 710 | RM 710

Cordless Fan Jacket

Jaket Kipas Tanpa Kord
充电式风扇外套



- Stay cool in hot harsh job site environments

M / L / XL



Selamanya stok masih ada 售完即止 WHILE STOCK LAST

Standard Equipment: Battery Holder

- Without Charger & Battery

Air Flow Settings Tetapan Aliran Udara 空气流量设置	**Turbo | High | Medium | Low**
Air Flow Aliran Udara 空气流量	**Turbo: 1.4m³/min | High: 1.2m³/min | Med: 1.0m³/min | Low: 0.8m³/min**
Size Saiz 尺寸	**M | L | XL**
Pockets Poket 口袋	**3**
Net weight Berat Bersih 淨重	**660g (1.5lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 28 hrs | Medium: 20 hrs | High: 11 hrs with BL1850B**

Polyester **For general work**

Untuk kerja am | 用于一般工作

- Superior moisture permeability and water repellent

DCV202YXL 18V

RM 940

Cordless Heated Vest

Ves Pemanas Tanpa Kord
充电式发热背心



- Stay warm in cold harsh job site environments

XL



- Without Charger & Battery

Heat Zones Tetapan Aliran Udara 發熱區域	**Total: 4 | Chest: 2 | Back: 2**
Heat Settings Aliran Udara 加熱設定	**High | Medium | Low**
Heat Value Aliran Udara 加熱值	**High: 9.5W | Mid : 4.5W | Low: 2.3W**
Size Saiz 尺寸	**XL**
Pockets Poket 口袋	**4**
Net Weight Berat Bersih 淨重	**0.5kg (1.1lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 29 hrs | Medium: 17 hrs | High: 8 hrs with BL1850B**

Polyester

- High repellency fabric

Cordless Heated Blanket

Selimut Elektrik Tanpa Kord 充电式电热毯

1.5m Extension cord

Kabel sambungan 连接电缆





Washable & Dryable

basuh dan Kering 水洗和烘干

Be sure to remove the battery holder from the blanket before washing and drying

*Masa Penggunaan Berterusan 连续使用时间

Continuous Usage Time with BL1850B (Low Mode)

29hrs (approx.)



DCB200B 18V

RM 1,043

Cordless Heated Blanket

Selimut Elektrik Tanpa Kord
充电式电热毯



- Machine-washable and machine-dryable



Standard Equipment: Battery Holder, Storage Bag, Extension Cord

- Without Charger & Battery

Heat Zone Tetapan Aliran Udara 发热区域	**Upper Center: 1**
Heat Settings Aliran Udara 加热设定	**High | Medium | Low**
Heat Value Aliran Udara 加热值	**High: 9.5W | Med: 4.5W | Low: 2.3W**
Dimensions (L x W) Dimensi 体积	**700x1,400mm (27-1/2"x55")**
Net Weight Berat Bersih 淨重	**0.58kg (1.28lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 29 hrs | Med: 16.5 hrs | High: 8 hrs with BL1850B**

CB100DB 12Vmax

RM 1,043

Cordless Heated Blanket

Selimut Elektrik Tanpa Kord
充电式电热毯



- Machine-washable and machine-dryable



Standard Equipment: Battery Holder, Storage Bag, Extension Cord

- Without Charger & Battery

Heat Zone Tetapan Aliran Udara 发热区域	**Upper Center: 1**
Heat Settings Aliran Udara 加热设定	**High | Medium | Low**
Heat Value Aliran Udara 加热值	**High: 9.5W | Med: 4.5W | Low: 2.3W**
Dimensions (L x W) Dimensi 体积	**700x1,400mm (27-1/2"x55")**
Net Weight Berat Bersih 淨重	**0.58kg (1.28lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 14 hrs | Med: 7.5 hrs | High: 4 hrs with BL1041B**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

LED FLASHLIGHT

Lampu Suluh LED LED照明灯







Distance*

Long-distance irradiation

640m
Spot mode

10m Front
(side: 10m)

6m Front
(side: 6m)


4.5m Front
(side: 5.3m)

6.5m Front
(side: 6.5m)

2.3m Front
(side: 2.6m)

2.8m Front
(side: 3m)

2.8m Front
Flood mode (side: 3m)

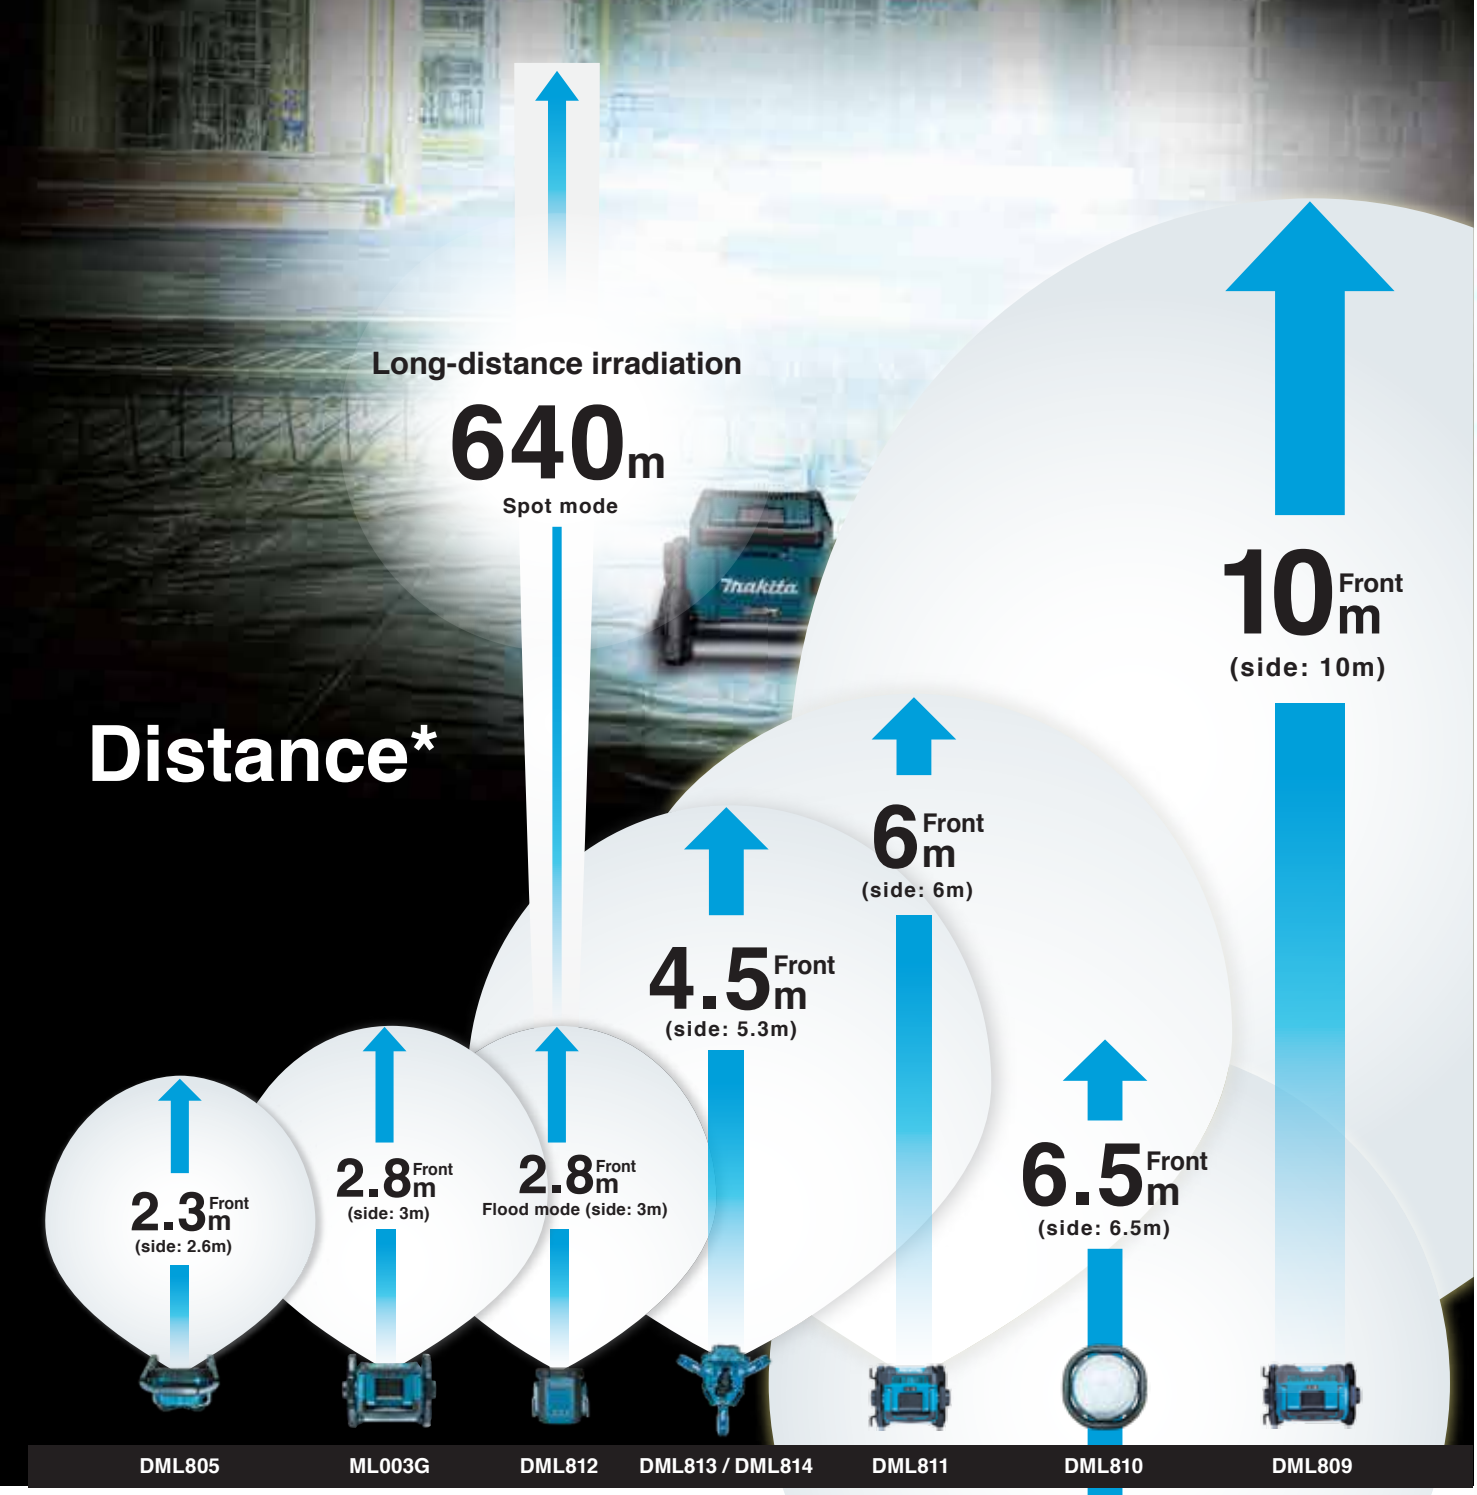

DML805	ML003G	DML812	DML813 / DML814	DML811	DML810	DML809

*measured in accordance with ANSI

Luminous flux




DML805	ML003G	DML812	DML813 DML814	DML811	DML810	DML809
18V	18V 40Vmax	18V	18V	18V	18V	18V
750 lm	1,100 lm	1,250 lm Spot+Flood mode	3,000 lm		5,500 lm	10,000 lm

*All list price shown are for reference only (exclude SST).
*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

40Vmax Li-ion XGT | 18V LXT

DML813 (MYADML813) 18V
RM 2,103.50

Cordless Worklight
Lampu Kerja Tanpa Kord
充电式工作灯



18V

- LED color is daylight white, which is similar to the natural light and ideal for working spaces



Spot lighting



NEW BARU 新

Standard Equipment: Shoulder Belt, Tool Bag
- Without Charger & Battery

Luminous Flux Cahaya Fluks 发光通量	**High: 3,000 | Mid: 1,700 | Low: 900 lm**
Illuminance Pencahayaan 照度	**at 1m from the light source:** **High: 1,250 | Mid: 750 | Low: 400 lx**
	at 3m from the light source: **High: 130 | Mid: 80 | Low: 40 lx**
	at 5m from the light source: **High: 50 | Mid: 30 | Low: 15 lx**
Lighting Coverage Liputan Pencahayaan 照明覆盖	**Front: 4.5m | Sides: 5.3m**
Dimensions (L x W x H) Dimensi 体积	**Folding Position:** **260x216x1,000mm (10-1/4x8-1/2x39-3/8")**
	Operating Position (Max Height): **573x658x1,250 - 2,240mm (22-1/2x26x49-1/4-88")**
Net Weight Berat Bersih 淨重	**7.2 - 7.9kg (15.9 - 17.4lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 10 hrs | Med: 5.5 hrs |** **High: 3 hrs with BL1850B**

DML814 (MYADML814) 18V
RM 2,178

Cordless Worklight
Lampu Kerja Tanpa Kord
充电式工作灯



18V

- LED color is daylight white, which is similar to the natural light and ideal for working spaces



Spot lighting



Area lighting



NEW BARU 新

Standard Equipment: Shoulder Belt, Tool Bag
- Without Charger & Battery

Luminous Flux Cahaya Fluks 发光通量	**High: 3,000 | Mid: 1,700 | Low: 900 lm**
Illuminance Pencahayaan 照度	**at 1m from the light source:** **High: 1,250 | Mid: 750 | Low: 400 lx**
	at 3m from the light source: **High: 130 | Mid: 80 | Low: 40 lx**
	at 5m from the light source: **High: 50 | Mid: 30 | Low: 15 lx**
Lighting Coverage Liputan Pencahayaan 照明覆盖	**Front: 4.7m | Sides: 5.6m**
Dimensions (L x W x H) Dimensi 体积	**Folding Position:** **260x216x1,000mm (10-1/4x8-1/2x39-3/8")**
	Operating Position (Max Height): **573x658x1,250 - 2,240mm (22-1/2x26x49-1/4-88")**
Net Weight Berat Bersih 淨重	**7.4 - 8.1kg (16.3 - 17.9lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 10 hrs | Med: 5.5 hrs |** **High: 3 hrs with BL1850B**

DML810 18V / AC
RM 2,589.70

Cordless Area Worklight
Lampu Kerja Kawasan Tanpa Kord
充电式区域工作灯



18V

AC ALTERNATING CURRENT

- Self-righting design won't fall over even if bumped



Standard Equipment: AC Power Cord
- Without Charger & Battery

Luminous Flux Cahaya Fluks 发光通量	**High: 5,500lm | Mid: 3,000lm |** **Low: 1,500lm**
illuminance Pencahayaan 照度	**at 1m from the light source:** **550 / 300 / 150 lx**
	at 3m from the light source: **70 / 40 / 20 lx**
	at 5m from the light source: **25 / 15 / 7 lx**
Dimensions (L x W x H) Dimensi 体积	**420x420x787mm** **(16-1/2"x16-1/2"x31")**
Net Weight Berat Bersih 淨重	**13.9 - 15.3kg (30.6 - 33.7lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**18 hrs with BL1850B x2**

ML003G (TWAML003G) 40Vmax / 18V
RM 1,038

Cordless Worklight
Lampu Kerja Tanpa Kord
充电式工作灯



40Vmax

18V

- IP65 rated for maximum weather and water resistance suitable for jobsite use



NEW BARU 新


- Without Charger & Battery

XGT

Luminous Flux Cahaya Fluks 发光通量	**High: 1,100lm | Low: 450lm**
illuminance Pencahayaan 照度	**at 1m from the light source** **High: 500lx | Low: 200lx**
Dimensions (L x W x H) Dimensi 体积	**249x298x280mm** **(9-3/4x11-3/4x11")**
Net Weight Berat Bersih 淨重	**3.7 - 4.7kg (8.2 - 10.4lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**High: 10 hrs | Low: 22 hrs** **with BL4040**

DML809 (GBDDML809) 18V / AC
RM 2,555.10

Cordless Worklight
Lampu Kerja Tanpa Kord
充电式工作灯



18V

AC ALTERNATING CURRENT

- 96 super luminous daylight white LEDs



NEW BARU 新

Standard Equipment: AC Power Cord
- Without Charger & Battery


Luminous Flux Cahaya Fluks 发光通量	**High: 10,000lm | Mid: 4,000lm |** **Low: 2,000lm**
illuminance Pencahayaan 照度	**at 1m from the light source:** **3,800 / 1,500 / 800 lx**
	at 3m from the light source: **380 / 150 / 80 lx**
	at 5m from the light source: **150 / 60 / 30 lx**
Dimensions (L x W x H) Dimensi 体积	**249x370x278mm** **(9-3/4x14-1/2x11")**
Net Weight Berat Bersih 淨重	**5.7 - 7.0 kg (12.6 - 15.4 lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**8.5 hrs with BL1860B x2** **Low mode**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

DML811 (GBDDML811) 18V / AC
RM 1,692.40

Cordless Worklight
Lampu Kerja Tanpa Kord
充电式工作灯



18V | AC ALTERNATING CURRENT

- 30 super luminous daylight white LEDs

NEW BARU 新




Standard Equipment: AC Power Cord

- Without Charger & Battery

Luminous Flux Cahaya Fluks 发光通量	**High: 3,000lm | Mid: 1,500lm | Low: 750lm**
illuminance Pencahayaan 照度	**at 1m from the light source: 1,800 / 800 / 350 lx**
	at 3m from the light source: 200 / 100 / 40 lx
	at 5m from the light source: 85 / 40 / 17 lx
Dimensions (L x W x H) Dimensi 体积	**249x302x271mm (9-3/4x11-7/8x10-5/8")**
Net Weight Berat Bersih 淨重	**4.1 - 4.8kg (9.0 - 10.5lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**13 hrs with BL1860B Low mode**

DML805 (GBBDML805) (GBDDML805) 18V / AC
RM 1,037.50

Corded and Cordless LED Worklight
Lampu Kerja LED Kuasa Elektrik dan Tanpa Kord
电源及充电式LED工作灯



18V | AC ALTERNATING CURRENT

- 2-mode operation: delivers 750 lumens on high mode or 450 lumens on low mode



- Without Charger & Battery

Luminous Flux Cahaya Fluks 发光通量	**Hi: 750lm, Lo: 450lm**
illuminance Pencahayaan 照度	**at 0.5m from the light source Hi: 1,150lx, Lo: 750lx**
	at 1m from the light source Hi: 300lx, Lo: 200lx
Dimensions (L x W x H) Dimensi 体积	**214x261x328mm (8-3/8"x10-1/4"x12-7/8")**
Net Weight Berat Bersih 淨重	**2.3 - 2.7kg (5.1 - 5.9lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**10.5 hrs with BL1850B**

DML812 (TWADML812) 18V
RM 758

Cordless Flashlight
Lampu Suluh Tanpa Kord
充电式工作灯



18V

- Super luminous daylight white LEDs



Standard Equipment: Strap Hook

- Without Charger & Battery

XPT

Luminous Flux Cahaya Fluks 发光通量	**Spot: 600 lm | Flood: 1,000 lm | Spot-Flood: 1,250 lm**
illuminance Pencahayaan 照度	**Spot: 71,000 lx | Flood: 520 lx | Spot-Flood: 51,000 lx**
Dimensions (L x W x H) Dimensi 体积	**313x119x115mm (12-3/8"x4-11/16"x4-1/2")**
Net Weight Berat Bersih 淨重	**1.2 - 1.6kg (2.6 - 3.4lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Spot: 8.5 hrs | Flood: 6.5 hrs | Spot-Flood: 5.0 hrs | Strobe: 7.0 hrs with BL1850B**

ML001G (AUAML001G) 40Vmax
RM 239.30

Cordless LED Flashlight
Lampu Suluh LED Tanpa Kord
充电式LED照明灯



40Vmax



NEW BARU 新

Standard Equipment: Strap Hook


- Without Charger & Battery

XGT

Luminous Flux Cahaya Fluks 发光通量	**160lm**
illuminance Pencahayaan 照度	**at 1m from the light source: 3,000lx**
Dimensions (L x W x H) Dimensi 体积	**281x88x121mm (11-1/8x3-1/2x4-3/4")**
Net Weight Berat Bersih 淨重	**1.0 - 1.3kg (2.2 - 2.9lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**55 hrs with BL4040**

DML802 (DEADML802) 18V
RM 335.80

Cordless LED Flashlight
Lampu Suluh LED Tanpa Kord
充电式LED工作灯



18V

- 12 position pivoting flashlight head with positive stops from -60° - 110°



Sementara stok masih ada 售完即止
WHILE STOCK LAST

- Without Charger & Battery

Luminous Flux Cahaya Fluks 发光通量	**180lm**
illuminance Pencahayaan 照度	**at 1m from the light source: 4,000lx**
Dimensions (L x W x H) Dimensi 体积	**272x79x116mm (10-3/4"x3-1/8"x4-9/16")**
Net Weight Berat Bersih 淨重	**0.64 - 1.0kg (1.4 - 2.2lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**20 hrs with BL1850B**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

40Vmax Li-ion XGT | 18V LXT | 12Vmax CXT

DML815 (AUADML815) 18V
RM 216.20

Cordless LED Flashlight
Lampu Suluh LED Tanpa Kord
充电式LED工作灯



18V

- 12 position pivoting flashlight head with positive stops from 0° - 170°



NEW BARU 新


Standard Equipment: Strap Hook

- Without Charger & Battery

Luminous Flux Cahaya Fluks 发光通量	**160lm**
Illuminance Pencahayaan 照度	**at 1m from the light source: 3,000lx**
Dimensions (L x W x H) Dimensi 体积	**272x79x116mm** **(10-3/4x3-1/8x4-9/16")**
Net Weight Berat Bersih 淨重	**0.26 - 0.93kg (0.57 - 2.05lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**54 hrs with BL1860B**

DML808 (AUADML808) 18V
RM 347

Cordless LED Flashlight
Lampu Suluh LED Tanpa Kord
充电式LED工作灯



18V

- Multifaceted Reflector Illuminates Evenly for Increased Visibility




- Without Charger & Battery

Luminous Flux Cahaya Fluks 发光通量	**190lm**
illuminance Pencahayaan 照度	**at 1m from the light source** **170 - 4,500lx**
Dimensions (L x W x H) Dimensi 体积	**297x79x119mm** **(11-3/4"x3-1/8"x4-11/16")**
Net Weight Berat Bersih 淨重	**0.73 - 1.09kg (1.6 - 2.4lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**26 hrs with BL1850B**

DML808/ML106 VIDEO CLIP Models and specs may vary by country

ML106 (AUAML106) 12Vmax
RM 346.90

Cordless LED Flashlight
Lampu Suluh LED Tanpa Kord
充电式LED灯



12Vmax

- Multifaceted Reflector Illuminates Evenly for Increased Visibility



Standard Equipment: Strap Hook


- Without Charger & Battery

Luminous Flux Cahaya Fluks 发光通量	**190lm**
Illuminance Pencahayaan 照度	**at 1m from the light source** **170 - 4,500lx**
Dimensions (L x W x H) Dimensi 体积	**271x66x93mm** **(10-5/8"x2-5/8"x3-5/8")**
Net Weight Berat Bersih 淨重	**0.61 - 0.78kg (1.3 - 1.7lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**6 hrs with BL1021B**

DML808/ML106 VIDEO CLIP Models and specs may vary by country

ML105 (AUAML105) 12Vmax
RM 319.70

Cordless LED Flashlight
Lampu Suluh LED Tanpa Kord
充电式LED工作灯



12Vmax

- Multifaceted Reflector Illuminates Evenly for Increased Visibility




Standard Equipment: Strap Hook

- Without Charger & Battery

Luminous Flux Cahaya Fluks 发光通量	**190lm**
Illuminance Pencahayaan 照度	**at 1m from the light source** **5,500lx**
Dimensions (L x W x H) Dimensi 体积	**249x66x93mm** **(9-3/4"x2-5/8"x3-5/8")**
Net Weight Berat Bersih 淨重	**0.53 - 0.70kg (1.2 - 1.5lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**7 hrs with BL1021B**

ML002G (TWAML002G) 40Vmax
RM 683.10

Cordless LED Worklight
Lampu Kerja LED Tanpa Kord
充电式LED工作灯



40Vmax



NEW BARU 新

- Without Charger & Battery

XGT XPT

Main Light (on bar side) Lampu Utama 主灯	**Luminous flux (Full brightness): 710lm** **illuminance (Full brightness): 340lx** **Luminous flux (Half brightness): 340lm** **illuminance (Half brightness): 310lx**
Sub Light (on top side) Lampu Tambahan 副灯	**Luminous flux: 130lm** **illuminance: 1,900lx**
Dimensions (L x W x H) Dimensi 体积	**376x86x126mm** **(14-3/4x3-3/8x5")**
Net Weight Berat Bersih 淨重	**1.2 - 1.5kg (2.7 - 3.3lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**51 hrs with BL4040**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

DML807 (AUBDML807) 18V
RM 547.50

Cordless LED Flashlight
Lampu Suluh LED Tanpa Kord
充电式LED手电筒



18V



- **USB power supply switch with auto-off function for saving battery power**


Main light (on bar side) Lampu Utama 主灯	**Luminous flux (Full brightness): 710 lm** **Illuminance (Full brightness): 340 lx** **Luminous flux (Half brightness): 340 lm** **Illuminance (Half brightness): 310 lx**
Sub light (on top side) Lampu Tambahan 副灯	**Luminous flux: 130 lm** **Illuminance: 1,900 lx**
Dimensions (L x W x H) Dimensi 体积	**414x79x155mm** **(16-1/4"x3-1/8"x6-1/8")**
Net Weight Berat Bersih 淨重	**0.72 - 1.1kg (1.6 - 2.4lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**43 hrs with BL1850B**

- Without Charger & Battery

XPT

ML104 (AUAML104) 12Vmax
RM 549.20

Cordless LED Flashlight
Lampu Suluh LED Tanpa Kord
充电式LED手电筒



12Vmax



- **USB power supply switch with auto-off function for saving battery power**

Main light (on bar side) Lampu Utama 主灯	**Luminous flux (Full brightness): 710 lm** **Illuminance (Full brightness): 340 lx**
Sub light (on top side) Lampu Tambahan 副灯	**Luminous flux: 130 lm** **Illuminance: 1,900 lx**
Dimensions (L x W x H) Dimensi 体积	**414x66x132mm** **(16-1/4"x2-5/8"x5-3/16")**
Net Weight Berat Bersih 淨重	**0.61 - 0.78 kg (1.4 - 1.7 lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**19 hrs with BL1041B**

- Without Charger & Battery

XPT

ML006GX
RM 402.20

Cordless Flashlight
Lampu Suluh Tanpa Kord
充电式工作灯



40Vmax



NEW BARU | 新

- **Extra Bright 18 LED Flashlight Provides 500 Lumens**

Luminous Flux Cahaya Fluks 发光通量	**High: 500 | Mid: 250 | Low: 100 lm**
Illuminance Pencahayaan 照度	**at 0.5m from the light source:** **High: 800 | Mid: 400 | Low: 180 lx**
Dimensions (L x W x H) Dimensi 体积	**275 - 408x85x148mm** **(10-7/8-16x3-3/8x5-7/8")**
Net Weight Berat Bersih 淨重	**1.1 - 1.7kg (2.4 - 3.8lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 82 hrs | Med: 40 hrs |** **High: 20 hrs with BL4040**

Standard Equipment: Shoulder Strap
- Without Charger & Battery

XGT

DML816X
RM 373.50

Cordless Flashlight
Lampu Suluh Tanpa Kord
充电式工作灯

18V



NEW BARU | 新

- **Extra Bright 18 LED Flashlight Provides 500 Lumens**

Luminous Flux Cahaya Fluks 发光通量	**High: 500 | Mid: 250 | Low: 100 lm**
Illuminance Pencahayaan 照度	**at 0.5m from the light source:** **High: 800 | Mid: 400 | Low: 180 lx**
Dimensions (L x W x H) Dimensi 体积	**267 - 400x79x127mm** **(10-1/2-15-3/4x3-1/8x5")**
Net Weight Berat Bersih 淨重	**0.70 - 1.1kg (1.5 - 2.4lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 75 hrs | Med: 34 hrs |** **High: 17 hrs with BL1860B**

Standard Equipment: Shoulder Strap
- Without Charger & Battery

DML801 (DEBDML801) 18V
RM 313.50

Cordless LED Flashlight
Lampu Suluh LED Tanpa Kord
充电式LED手电筒



18V



- **Metal hang hook swivels 360° and folds away for extra convenience**

Dimensions (L x W x H) Dimensi 体积	**380x79x116mm** **(15"x9-11/16"x4-9/16")**
Net Weight Berat Bersih 淨重	**0.61 - 0.98kg (1.4 - 2.2lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Full brightness: 20 hrs with BL1860B** **Half brightness: 48 hrs with BL1860B**

- Without Charger & Battery

***All list price shown are for reference only (exclude SST).**
*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT 12Vmax CXT 10.8V

DML186 (DEADML186) 18V
RM 108.60

Cordless LED Flashlight
Lampu Suluh LED Tanpa Kord
充电式LED手电筒



18V




- Hand strap for extra convenience

• Without Charger & Battery

Dimensions (L x W x H) Dimensi 体积	**151x81x61mm (5-7/8"x3-3/16"x2-3/8")**
Net Weight Berat Bersih 淨重	**0.51 - 0.83kg (1.1 - 1.8lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**50 hrs with BL1830B**

ML103 (AUAML103) 12Vmax
RM 184.80

Cordless LED Flashlight
Lampu Suluh LED Tanpa Kord
充电式LED灯



12Vmax



- 1.5W white single diffusion LED provides bright and wide illumination

• Without Charger & Battery

Dimensions (L x W x H) Dimensi 体积	**77x54x28mm (3x2-1/8x1-1/8")**
Net Weight Berat Bersih 淨重	**0.27 - 0.43kg (0.6 - 1.0lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**14 hrs with BL1021B**

ML101 (STEXML101) 10.8V
RM 220.20

Rechargeable Grab Light
Lampu Suluh LED Tanpa Kord
充电式LED工作灯




10.8V



- Can be positioned at various places and angles with flexible legs

• Without Charger & Battery

Dimensions (L x W x H) Dimensi 体积	**119x52x55mm (4-11/16x2-1/16x2-3/16")**
Net Weight Berat Bersih 淨重	**0.32kg (0.7lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**9 hrs with BL1013**

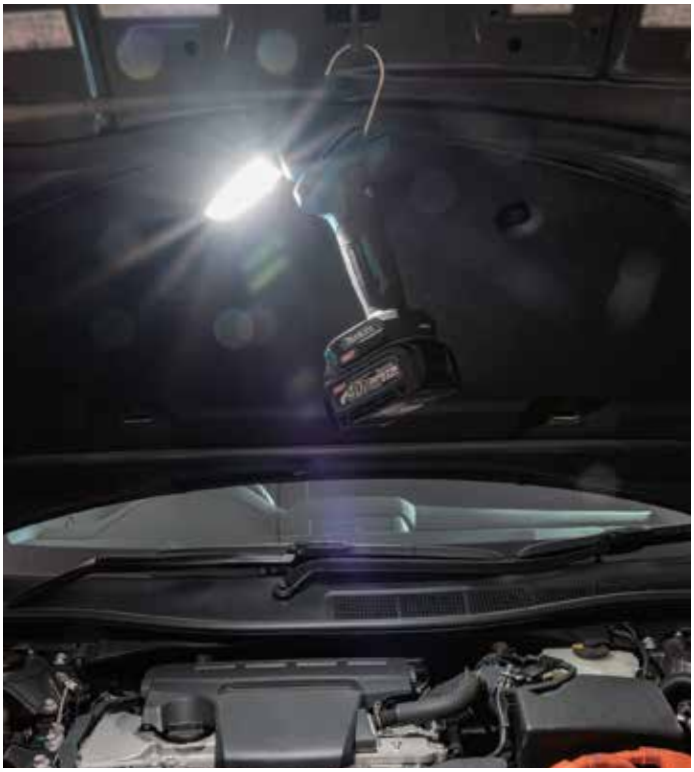



***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

Product Comparison List

	DML813 18V	DML814 18V	DML810 18V AC	ML003G 40Vmax 18V	DML809 18V AC	DML811 18V AC	DML805 18V AC
							
Run Time (hrs)	**Up to: 3** Hi: with BL1850B **Up to: 10** Lo: with BL1850B	**Up to: 3** Hi: with BL1850B **Up to: 10** Lo: with BL1850B	**Up to: 15** with BL1850B x2	**Up to: 10** Hi: with BL4040 **Up to: 22** Lo: with BL4040	**Up to: 8.5** Lo: with BL1860B x2	**Up to: 13** Lo: with BL1860B	**Up to: 8.5** Hi: with BL1850B **Up to: 17** Lo: with BL1850B
Illuminance	**Hi: 1,250lx, Lo: 400lx** at 1m from the light **Hi: 130lx, Lo: 40lx** at 3m from the light **Hi: 50lx, Lo: 15lx** at 5m from the light	**Hi: 1,250lx, Lo: 400lx** at 1m from the light **Hi: 130lx, Lo: 40lx** at 3m from the light **Hi: 50lx, Lo: 15lx** at 5m from the light	**550lx | 300lx | 150lx** at 1m from the light	**Hi: 500lx** **Lo: 200lx** at 1m from the light	**Hi: 3,800lx, Lo: 800lx** at 1m from the light **Hi: 380lx, Lo: 80lx** at 3m from the light **Hi: 150lx, Lo: 30lx** at 5m from the light	**Hi: 1,800lx, Lo: 350lx** at 1m from the light **Hi: 200lx, Lo: 40lx** at 3m from the light **Hi: 85lx, Lo: 17lx** at 5m from the light	**Hi: 1,150lx, Lo: 750lx** at 0.5m from the light **Hi: 300lx, Lo: 200lx** at 1m from the light
Luminous Flux (lm=lumens)	High: **3,000lm** Med: **1,700lm** Low: **900lm**	High: **3,000lm** Med: **1,700lm** Low: **900lm**	High: **5,500lm** Med: **3,000lm** Low: **1,500lm**	High: **1,100lm** Low: **450lm**	High: **10,000lm** Med: **4,000lm** Low: **2,000lm**	High: **3,000lm** Med: **1,500lm** Low: **750lm**	**Hi: 750lm** **Lo: 450lm**
Net Weight	**7.2 - 7.9kg** **(15.9 - 17.4lbs.)**	**7.4 - 8.1kg** **(16.3 - 17.9lbs.)**	**13.9 - 15.3kg** **(30.6 - 33.7lbs)**	**3.7 - 4.7kg** **(8.2 - 10.4lbs)**	**5.7 - 7.0kg** **(12.6 - 15.4lbs)**	**4.1 - 4.8kg** **(9.0 - 10.5lbs)**	**2.3 - 2.7kg** **(5.1 - 5.9lbs)**

	DML812 18V	ML001G 40Vmax	DML802 18V	DML815 18V	DML808 18V	ML106 12Vmax	ML105 12Vmax	ML002G 40Vmax
					 Zoom Function	 Zoom Function		
Run Time (hrs)	**Up to: 8** with BL1850B	**Up to: 55** with BL4040	**Up to: 20** with BL1850B	**Up to: 54** with BL1860B	**Up to: 26** with BL1850B	**Up to: 12** with BL1041B	**Up to: 14** with BL1041B	**Up to: 51** with BL4040
Illuminance	**71,000lx | 51,000lx | 520lx** at 1m from the light	**3,000lx** at 1m from the light	**4,000lx** at 1m from the light	**3,000lx** at 1m from the light	**170 - 4,500lx** at 1m from the light	**170 - 4,500lx** at 1m from the light	**5,500lx** at 1m from the light	Main light (Full): **340lx** Main light (Half): **310lx** Sub light (On Top): **1,900lx** at 1m from the light
Luminous Flux (lm=lumens)	Spot: **600lm** Spot/ Flood: **1,250lm** Flood: **1,000lm**	**160lm**	**180lm**	**160lm**	**190lm**	**190lm**	**190lm**	Main light (Full): **710lm** Main light (1/4): **340lm** Sub light (On Top): **130lm**
Net Weight	**1.7kg** **(3.8lbs)**	**1.0 - 1.3kg** **(2.2 - 2.9lbs)**	**0.64 - 1.0kg** **(1.4 - 2.2lbs)**	**0.26 - 0.93kg** **(0.57 - 2.05lbs)**	**0.73 - 1.09kg** **(1.6 - 2.4lbs)**	**0.61 - 0.78kg** **(1.3 - 1.7lbs)**	**0.53 - 0.70kg** **(1.2 - 1.5lbs)**	**1.2 - 1.5kg** **(2.7 - 3.3lbs)**

	DML807 18V	ML104 12Vmax	ML006G 40Vmax	DML816 18V	DML801 18V	DML186 18V	ML103 12Vmax	ML101 10.8V
								
Run Time (hrs)	**Up to: 23** Main light (1/2) with BL1850B **Up to: 36** Sub light with BL1850B	**Up to: 17** Main light (1/2) with BL1041B **Up to: 19** Sub light with BL1041B	**Up to: 20** Hi: with BL4040 **Up to: 82** Lo: with BL4040	**Up to: 17** Hi: with BL1860B **Up to: 75** Lo: with BL1860B	**Up to: 20** Full: with BL1860B **Up to: 48** Half: with BL1860B	**Up to: 50** with BL1830B	**Up to: 28** with BL1041B	**Up to: 9** with BL1013
Illuminance	Main light (Full): **340lx** Main light (1/2): **310lx** Sub light (On Top): **1,900lx** at 0.5m from the light	Main light (Full): **340lx** Main light (1/4): **190lx** Sub light (On Top): **1,900lx** at 0.5m from the light	**Hi: 800lx** **Med: 400lx** **Lo: 180lx** at 0.5m from the light	**Hi: 800lx** **Med: 400lx** **Lo: 180lx** at 0.5m from the light	**Full: 400lx** **Half: 200lx** at 0.5m from the light	**500lx** at 1m from the light	**240lx** at 0.5m from the light **50lx** at 1m from the light	**400lx** at 1m from the light
Luminous Flux (lm=lumens)	Main light (Full): **710lm** Main light (1/2): **340lm** Sub light (On Top): **130lm**	Main light (Full): **710lm** Main light (1/4): **190lm** Sub light (On Top): **130lm**	High: **500lm** Med: **250lm** Low: **100lm**	High: **500lm** Med: **250lm** Low: **100lm**	**Full: 240lm** **Half: 120lm**	-	**100lm**	-
Net Weight	**0.72 - 1.1kg** **(1.6 - 2.4lbs)**	**0.61 - 0.78kg** **(1.4 - 1.7lbs)**	**1.1 - 1.7kg** **(2.4 - 3.8lbs)**	**0.7 - 1.1kg** **(1.5 - 2.4lbs)**	**0.61 - 0.98kg** **(1.4 - 2.2lbs)**	**0.51 - 0.83kg** **(1.1 - 1.8lbs)**	**0.27 - 0.43kg** **(0.6 - 1.0lbs)**	**0.32kg** **(0.7lbs.)**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

Capacity	DRY Kering 干	WET Basah 湿
15L Dry 12L Wet	 DVC155L Suction Power 105W  DVC152L Suction Power 90W	 DVC150L HYBRID Suction Power 320W (AC) 25-70W (DC)
15L	 DVC157L Suction Power 110W HEPA  DVC154L Suction Power 65W HEPA  DVC153L Suction Power 90W HEPA  DVC151L HYBRID Suction Power 320W (AC) 25-70W (DC) HEPA	
8L Dry 6L Wet	 DVC865L Suction Power 105W  DVC862L Suction Power 65W	 DVC860L HYBRID Suction Power 320W (AC) 25-70W (DC)
8L	 DVC867L Suction Power 110W HEPA  DVC864L Suction Power 65W HEPA  DVC863L Suction Power 90W HEPA	

Model	Powered	Max Air Flow (m³/min)	Max Sealed Suction (kPa)	BL MOTOR	XPT	AWS
DVC867L	18Vx2	2.1	11	●	●	●
DVC865L	18Vx2	2.1	11	●	●	–
DVC864L	18Vx2	2.1	9.8	●	●	●
DVC863L	18Vx2	2.1	9.8	●	●	–
DVC862L	18Vx2	2.1	9.8	●	●	–
DVC860L	18Vx2 | AC	DC: 2.1** | AC: 3.6**	DC: 9.0 | AC: 24	–	–	–
DVC157L	18Vx2	2.1	11	●	●	●
DVC155L	18Vx2	2.1	11	●	●	–
DVC154L	18Vx2	2.1	9.8	●	●	●
DVC153L	18Vx2	2.1	9.8	●	●	–
DVC152L	18Vx2	2.1	9.8	●	●	–
DVC151L	18Vx2 | AC	DC: 2.1** | AC: 3.6**	DC: 9.0 | AC: 24	–	–	–
DVC150L	18Vx2 | AC	DC: 2.1** | AC: 3.6**	DC: 9.0 | AC: 24	–	–	–

**with hose Ø 38-2.5

All list price shown are for reference only (exclude SST).

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V X2 36V LXT®

Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DVC150LZ
RM 6,217

Corded & Cordless Vacuum Cleaner (Wet & Dry)
Pembersih Vakum Kuasa Elektrik Dan Tanpa Kord (Basah dan Kering)
充电式＋电源驱动吸尘机(干湿两用)



WET Basah 湿
DRY Kering 干



- For both wet and dry vacuum cleaning

Standard Equipment: Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box, Connection Cord

- LZ: Without Charger & Battery

Capacity Kapasiti 尘袋容量	**Dust: 15L | Water: 12L**
Max Air Flow Aliran Udara 最大空气流量	**AC: 3.6m³/min | DC: 2.1m³/min**
Max Sealed Suction Sedutan Terkedap 最大密封吸力	**AC: 24kPa | DC: 9kPa**
Suction Power Kuasa Sedutan 吸力	**AC: 320W | DC: 25 - 70W**
Dimensions (L x W x H) Dimensi 体积	**366x334x421mm (14-3/8"x13-1/8"x16-1/2")**
Net Weight Berat Bersih 净重	**8.9 - 9.6kg (19.7 - 21.1lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**40 min with BL1850B x2 (Speed Dial 5)**

DVC151LZ
RM 7,038

Corded and Cordless Vacuum Cleaner (Dry)
Pembersih Vakum Kuasa Elektrik Dan Tanpa Kord (Kering)
充电式＋电源驱动吸尘机(干用)



DRY Kering 干



- 15L Large dust bag capacity

Standard Equipment: Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm), Hose (28mm), Front Cuffs (22, 24, 28), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Damper, Dry Powder FIlter, Tool Box, Connection Cord

- LZ: Without Charger & Battery

HEPA filter

Capacity Kapasiti 尘袋容量	**Dust: 15L**
Max Air Flow Aliran Udara 最大空气流量	**AC: 3.6m³/min | DC: 2.1m³/min**
Max Sealed Suction Sedutan Terkedap 最大密封吸力	**AC: 24kPa | DC: 9kPa**
Suction Power Kuasa Sedutan 吸力	**AC: 320W | DC: 25 - 70W**
Dimensions (L x W x H) Dimensi 体积	**366x334x421mm (14-3/8"x13-1/8"x16-1/2")**
Net Weight Berat Bersih 净重	**9.6 - 10.3kg (21.2 - 22.6lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**65 min with BL1850B x2**

DVC152LZ
RM 4,843

Cordless Vacuum Cleaner (Wet & Dry)
Pembersih Vakum Tanpa Kord (Basah dan Kering)
充电式吸尘机(干湿两用)



WET Basah 湿
DRY Kering 干



- For both wet and dry vacuum cleaning

Standard Equipment: Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box

- LZ: Without Charger & Battery

BL MOTOR XPT

Capacity Kapasiti 尘袋容量	**Dust: 15L | Water: 12L**
Max Air Flow Aliran Udara 最大空气流量	**2.1m³/min**
Max Sealed Suction Sedutan Terkedap 最大密封吸力	**9.8kPa**
Suction Power Kuasa Sedutan 吸力	**90W**
Dimensions (L x W x H) Dimensi 体积	**366x334x421mm (14-3/8"x13-1/8"x16-1/2")**
Net Weight Berat Bersih 净重	**7.3 - 7.9kg (16.0 - 17.4lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**40 min with BL1850B x2**

DVC153LZ
RM 5,665

Cordless Vacuum Cleaner (Dry)
Pembersih Vakum Tanpa Kord (Kering)
充电式吸尘机(干用)



DRY Kering 干



- 15L Large dust bag capacity

Standard Equipment: Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm), Hose (28mm), Front Cuffs (22, 24, 28), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Damper, Dry Powder Filter

- LZ: Without Charger & Battery

BL MOTOR XPT HEPA filter

Capacity Kapasiti 尘袋容量	**Dust: 15L**
Max Air Flow Aliran Udara 最大空气流量	**2.1m³/min**
Max Sealed Suction Sedutan Terkedap 最大密封吸力	**9.8kPa**
Suction Power Kuasa Sedutan 吸力	**90W**
Dimensions (L x W x H) Dimensi 体积	**366x334x421mm (14-3/8"x13-1/8"x16-1/2")**
Net Weight Berat Bersih 净重	**8.0 - 8.6kg (17.6 - 19.0lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**40 min with BL1850B x2**

DVC154LZ | DVC154LZX
RM 7,365 | RM 6,508

Cordless Vacuum Cleaner (Dry)
Pembersih Vakum Tanpa Kord (Kering)
充电式吸尘机(干用)



DRY Kering 干



- Auto-Start Wireless System (AWS) Connects to Power Tool with Bluetooth

Standard Equipment:
DVC154LZ: Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Front Cuffs, Dry Powder Filter, Damper, Wireless Unit (Build-in)

DVC154LZX: Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Front Cuffs, Dry Powder Filter, Damper, Wireless Unit (Build-in)

- LZ / LZX: Without Charger & Battery

BL MOTOR XPT AWS HEPA filter

Capacity Kapasiti 尘袋容量	**Dust: 15L**
Max Air Flow Aliran Udara 最大空气流量	**2.1m³/min**
Max Sealed Suction Sedutan Terkedap 最大密封吸力	**9.8kPa**
Suction Power Kuasa Sedutan 吸力	**65W**
Dimensions (L x W x H) Dimensi 体积	**366x334x421mm (14-3/8"x13-1/8"x16-1/2")**
Net Weight Berat Bersih 净重	**8.0 - 8.6kg (17.6 - 19.0lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**40 min with BL1850B x2**

***All list price shown are for reference only (exclude SST).**


*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V X2 (36V) LXT®

Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DVC155LZX3
RM 4,132

Cordless Vacuum Cleaner (Wet & Dry)
Pembersih Vakum Tanpa Kord (Basah dan Kering)
充电式吸尘机(干湿两用)



WET Basah 湿
DRY Kering 干

- **More Powerful Suction Power**



Standard Equipment: Floor Nozzle, Long Sash Nozzle, Telescopic Pipe Assembly, Bent Pipe, Pipe, Hose, Plastic Dust Bag x10, Filter, Tool Box, Plastic Dust Bag


- LZX3: Without Charger & Battery

BL MOTOR XPT

Capacity Kapasiti 尘袋容量	**Dust: 15L | Water: 12L**
Max Air Flow Aliran Udara 最大空气流量	**2.1m³/min**
Max Sealed Suction Sedutan Terkedap 最大密封吸力	**11kPa**
Suction Power Kuasa Sedutan 吸力	**105W**
Dimensions (L x W x H) Dimensi 体积	**366x334x421mm (14-3/8"x13-1/8"x16-1/2")**
Net Weight Berat Bersih 净重	**7.2 - 7.9kg (15.9 - 17.4lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**83 min with BL1850B x2**

DVC157LZX5
RM 5,932

Cordless Vacuum Cleaner (Dry)
Pembersih Vakum Tanpa Kord (Kering)
充电式吸尘机(干用)



DRY Kering 干



- **Auto-start Wireless System (AWS) connects to power tool with Bluetooth**

Standard Equipment: Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box, Damper, Dry Powder Filter

- LZX5: Without Charger & Battery

BL MOTOR XPT AWS HEPA filter

Capacity Kapasiti 尘袋容量	**Dust: 15L**
Max Air Flow Aliran Udara 最大空气流量	**2.4m³/min**
Max Sealed Suction Sedutan Terkedap 最大密封吸力	**11kPa**
Suction Power Kuasa Sedutan 吸力	**110W**
Dimensions (L x W x H) Dimensi 体积	**366x334x421mm (14-3/8"x13-1/8"x16-1/2")**
Net Weight Berat Bersih 净重	**8.0 - 8.6kg (17.6 - 19.0lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**83 min with BL1850B x2**

DVC860LZ
RM 4,607

Corded & Cordless Vacuum Cleaner (Wet & Dry)
Pembersih Vakum Kuasa Elektrik Dan Tanpa Kord (Basah dan Kering)
充电式 + 電源驱动吸尘机(干湿两用)



WET Basah 湿
DRY Kering 干

- **Cloth filter type: for both wet & dry vacuum cleaning**



Standard Equipment:
Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box, Connection Cord

- LZ: Without Charger & Battery

DVC860/DCL500

VIDEO CLIP
Models and specs may vary by country

Capacity Kapasiti 尘袋容量	**Dust: 8L Water: 6L**
Max Air Flow Aliran Udara 最大空气流量	**AC: 3.6m³/ min DC: 2.1m³/ min**
Max Sealed Suction Sedutan Terkedap 最大密封吸力	**AC: 24kPa DC: 9kPa**
Suction Power Kuasa Sedutan 吸力	**AC: 320W DC: 25 - 70W**
Dimensions (L x W x H) Dimensi 体积	**366x334x368mm (14-3/8"x13-1/8"x14-1/2")**
Net Weight Berat Bersih 净重	**8.6kg (19.0lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**65 min with BL1850B x2**

DVC862LPT2 RM 5,307 | DVC862LRT2 RM 5,007 | DVC862LZ RM 3,720

Cordless Vacuum Cleaner (Wet & Dry)
Pembersih Vakum Tanpa Kord (Basah dan Kering)
充电式吸尘机(干湿两用)

WET Basah 湿
DRY Kering 干

- **For both wet and dry vacuum cleaning**



Standard Equipment: Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box

- LPT2: 1x Two Port Multi Fast Charger, 2x 5.0Ah Battery
- LRT2: 1x Rapid Charger, 2x 5.0Ah Battery
- LZ: Without Charger & Battery

BL MOTOR XPT

Capacity Kapasiti 尘袋容量	**Dust: 8L Water: 6L**
Max Air Flow Aliran Udara 最大空气流量	**2.1m³/min**
Max Sealed Suction Sedutan Terkedap 最大密封吸力	**9.8kPa**
Suction Power Kuasa Sedutan 吸力	**90W**
Dimensions (L x W x H) Dimensi 体积	**366x334x368mm (14-3/8"x13-1/8"x14-1/2")**
Net Weight Berat Bersih 净重	**7.0kg (15.5lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**40 min with BL1850B x2**

DVC863LPT2 RM 5,918 | DVC863LRT2 RM 5,618 | DVC863LZ RM 4,333

Cordless Vacuum Cleaner (Dry)
Pembersih Vakum Tanpa Kord (Kering)
充电式吸尘机(干用)

DRY Kering 干

- **8L Large dust bag capacity enables continuous cleaning work**



Standard Equipment: Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose 38mm, Hose 28mm, Front Cuffs (22, 24, 38), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box

- LPT2: 1x Two Port Multi Fast Charger, 2x 5.0Ah Battery
- LRT2: 1x Rapid Charger, 2x 5.0Ah Battery
- LZ: Without Charger & Battery

BL MOTOR XPT HEPA filter

Capacity Kapasiti 尘袋容量	**Dust: 8L**
Max Air Flow Aliran Udara 最大空气流量	**2.1m³/min**
Max Sealed Suction Sedutan Terkedap 最大密封吸力	**9.8kPa**
Suction Power Kuasa Sedutan 吸力	**90W**
Dimensions (L x W x H) Dimensi 体积	**366x334x368mm (14-3/8"x13-1/8"x14-1/2")**
Net Weight Berat Bersih 净重	**7.7kg (17.1lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**40 min with BL1850B x2**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V X2 36V LXT®

Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DVC864LZ
RM 4,878

Cordless Vacuum Cleaner (Dry)
Pembersih Vakum Tanpa Kord (Kering)
充电式吸尘机(干用)



DRY Kering 干



- **Auto-Start Wireless System (AWS) Connects to Power Tool with Bluetooth**

Standard Equipment: Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm), Hose (28mm), Front Cuffs (22, 24, 28), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box, Wireless Unit (Build-in)

- LZ: Without Charger & Battery

BL MOTOR | XPT | AWS | HEPA Filter

Capacity Kapasiti 尘袋容量	**Dust: 8L**
Max Air Flow Aliran Udara 最大空气流量	**2.1m³/min**
Max Sealed Suction Sedutan Terkedap 最大密封吸力	**9.8kPa**
Suction Power Kuasa Sedutan 吸力	**65W**
Dimensions (L x W x H) Dimensi 体积	**366x334x368 mm (14-3/8"x13-1/8"x14-1/2")**
Net Weight Berat Bersih 净重	**7.7 - 8.4 kg (17.1 - 18.4 lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**40 min with BL1850B x2**

DVC865LZX3
RM 4,060

Cordless Vacuum Cleaner (Wet & Dry)
Pembersih Vakum Tanpa Kord (Basah dan Kering)
充电式吸尘机(干湿两用)



WET Basah 湿
DRY Kering 干



- **For both wet and dry vacuum cleaning**

Standard Equipment: Floor Nozzle, Long Sash Nozzle, Telescopic Pipe Assembly, Bent Pipe, Pipe, Hose, Plastic Dust Bag x10, Filter, Tool Box

- LZX3: Without Charger & Battery

BL MOTOR | XPT

Capacity Kapasiti 尘袋容量	**Dust: 8L | Water: 6L**
Max Air Flow Aliran Udara 最大空气流量	**2.1m³/min**
Max Sealed Suction Sedutan Terkedap 最大密封吸力	**11kPa**
Suction Power Kuasa Sedutan 吸力	**105W**
Dimensions (L x W x H) Dimensi 体积	**366x334x368mm (14-3/8x13-1/8x14-1/2")**
Net Weight Berat Bersih 净重	**7.0 - 7.7kg (15.4 - 17.0lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**83 min with BL1850B x2 Dial Mode 1**

DVC867LZX1
RM 5,815

Cordless Vacuum Cleaner (Dry)
Pembersih Vakum Tanpa Kord (Kering)
充电式吸尘机(干用)



DRY Kering 干



- **Auto-start Wireless System (AWS) connects to power tool with Bluetooth**

Standard Equipment: Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10 (195432-5), Cloth Filter, Tool Box

- LZX1: Without Charger & Battery

BL MOTOR | XPT | AWS | HEPA Filter

Capacity Kapasiti 尘袋容量	**Dust: 8L**
Max Air Flow Aliran Udara 最大空气流量	**2.4m³/min**
Max Sealed Suction Sedutan Terkedap 最大密封吸力	**11kPa**
Suction Power Kuasa Sedutan 吸力	**110W**
Dimensions (L x W x H) Dimensi 体积	**366x334x368mm (14-3/8x13-1/8x14-1/2")**
Net Weight Berat Bersih 净重	**7.7 - 8.4kg (17.0 - 18.5lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**83 min with BL1850B x2 Dial Mode 1**

DVC660Z
RM 3,118

Cordless Backpack Vacuum Cleaner
Pembersih Vakum Beg Galas Tanpa Kord
充电式背负吸尘机





- **Increased suction power for improved dust collection**

Standard Equipment: Floor Nozzle, Hose, Hose Band, Nozzle Assembly, Telescopic Pipe Assembly, Bent Pipe, Free Nozzle, Dust Bag

- Z: Without Charger & Battery

BL MOTOR

Capacity Kapasiti 尘袋容量	**Paper Dust Bag: 6.0L Cloth Dust Bag: 5.5L**
Max Air Flow Aliran Udara 最大空气流量	**w/ Hose complete 32-1.0: 2.2m³/min w/ Hose Complete 28-1.0: 2.0m³/min**
Max Sealed Suction Sedutan Terkedap 最大密封吸力	**11kPa**
Suction Power Kuasa Sedutan 吸力	**Max: 90W | High: 45W | Normal: 25W With Hose 28-1.0**
Dimensions (L x W x H) Dimensi 体积	**297x174x523mm (11-3/4"x6-7/8"x20-5/8")**
Net Weight Berat Bersih 净重	**6.1 - 6.7kg (13.4 - 14.8lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Max: 33 min | High: 62 min | Normal: 116 min with BL1850B x2**

DVC665Z
RM 3,773

Cordless Backpack Vacuum Cleaner
Pembersih Vakum Beg Galas Tanpa Kord
充电式背负吸尘机





- **Increased suction power for improved dust collection**

Standard Equipment: Hose Band, Filter Bag, Hose 28-1.5, Front Cuffs (22, 24)

- Z: Without Charger & Battery

BL MOTOR | AWS

Capacity Kapasiti 尘袋容量	**Paper Dust Bag: 6.0L Cloth Dust Bag: 5.5L**
Max Air Flow Aliran Udara 最大空气流量	**w/ Hose Complete 28-1.5: 1.8 m³/min**
Max Sealed Suction Sedutan Terkedap 最大密封吸力	**11kPa**
Suction Power Kuasa Sedutan 吸力	**High: 85W | Normal: 45W With Hose 28-1.5**
Dimensions (L x W x H) Dimensi 体积	**297x174x523mm (11-3/4"x6-7/8"x20-5/8")**
Net Weight Berat Bersih 净重	**6.1 - 6.7kg (13.5 - 14.9lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**High: 33 min | Normal: 62 min | with BL1850B x2**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V X2 (36V) | 18V | LXT® | Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DVC265ZX
RM 3,343

Cordless Backpack Vacuum Cleaner
Pembersih Vakum Beg Galas Tanpa Kord
充电式背负吸尘机





- **Increased suction power for improved dust collection**

Standard Equipment: Hose, Hose Band, Dust Bag, Front Cuffs (22, 24)

- ZX: Without Charger & Battery

BL MOTOR | AWS | HEPA filter

Capacity Kapasiti 尘袋容量	**Paper Dust Bag: 2.0L** **Cloth Dust Bag: 1.5L**
Max Air Flow Aliran Udara 最大空气流量	**w/ Hose Complete 28-1.0: 2.0m³/min** **w/ Hose Complete 28-1.5: 1.8m³/min**
Max Sealed Suction Sedutan Terkedap 最大密封吸力	**11kPa**
Suction Power Kuasa Sedutan 吸力	**w/ Hose 28-1.0: High: 90W | Normal: 45W** **w/ Hose 28-1.5: High: 85W | Normal: 45W**
Dimensions (L x W x H) Dimensi 体积	**230x152x373mm** **(9"x6"x14-3/4")**
Net Weight Berat Bersih 淨重	**3.9 - 4.5kg (8.6 - 10.0lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**High: 33 min | Low: 62 min** **with BL1850B x2**

DVC261Z
RM 2,577

Cordless Backpack Vacuum Cleaner
Pembersih Vakum Beg Galas Tanpa Kord
充电式背负吸尘机





- **Increased Suction Power for Improved Dust Collection**

Standard Equipment:
HEPA Filter Assembly, Hose Band, Paper Filter Bag (2L), Hose (28mm), Floor Nozzle, Flexible Rubber Nozzle, Telescopic Pipe Assembly, Bent Pipe

- Z: Without Charger & Battery

DVC261 VIDEO CLIP Models and specs may vary by country

BL MOTOR | HEPA filter

Capacity Kapasiti 容量	**Paper Dust Bag: 2.0L** **Cloth Dust Bag: 1.5L**
Max Air Flow Aliran Udara 最大空气流量	**w/ Hose complete 38-1.5: 2.3 m³/min** **w/ Hose complete 32-1.0: 2.2 m³/min** **w/ Hose Complete 28-1.0: 2.0 m³/min** **w/ Hose Complete 28-1.5: 1.8 m³/min**
Max Sealed Suction Sedutan Terkedap 最大密封吸力	**11 kPa**
Suction Power Kuasa Sedutan 吸力	**Max/ High/ Normal w/ Hose 38-1.5: 105/ 55/ 30W** **Max/ High/ Normal w/ Hose 32-1.0: 95/ 50/ 25W** **Max/ High/ Normal w/ Hose 28-1.0: 90/ 45/ 25W** **Max/ High/ Normal w/ Hose 28-1.5: 85/ 45/ 25W**
Dimensions (L x W x H) Dimensi 体积	**230x152x373mm** **(9"x6"x14-3/4")**
Net Weight Berat Bersih 淨重	**3.8 - 4.5kg (8.5 - 9.9lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Normal: 140 min | High: 75 min |** **Max: 40 min with BL1860B x2**

DVC260Z | DVC260ZX
RM 2,078 | RM 2,078

Cordless Backpack Vacuum Cleaner
Pembersih Vakum Beg Galas Tanpa Kord
充电式背负吸尘机





- **Max suction power 45W**

Standard Equipment:
DVC260Z: HEPA Filter Assembly, Backpack Shoulder Harness, Hose Band, Paper Filter Bag (2L), Hose 28mm (1.0M), Floor Nozzle, Flexible Rubber Nozzle, Telescopic Pipe Assembly, Bent Pipe
DVC260ZX: HEPA Filter Assembly, Backpack Shoulder Harness, Hose Band, Paper Filter Bag (2L), Hose 28mm (1.5M), Front Cuffs (22, 24)

- Z / ZX: Without Charger & Battery


DVC260 VIDEO CLIP Models and specs may vary by country


BL MOTOR | HEPA filter

Capacity Kapasiti 容量	**Filter bag / Paper dust bag: 2.0L** **Cloth dust bag: 1.5L**
Max Air Flow Aliran Udara 最大空气流量	**1.5m³/ min**
Max Sealed Suction Sedutan Terkedap 最大密封吸力	**7.1kPa (710mmH$_2$O)**
Suction Power Kuasa Sedutan 吸力	**High: 45W | Low: 25W**
Dimensions (L x W x H) Dimensi 体积	**230x152x373mm (9"x6"x14-3/4")**
Net Weight Berat Bersih 淨重	**3.8kg (8.5 lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 90 min | High: 60 min** **with BL1850B x2**

Robotic Cleaner
Pembersih Robotik 充电式智能吸尘机

Able to clean surface area of 500m² with BL1850B x2
Boleh membersihkan kawasan permukaan Seluas 500m2 dengan BL1850B x2
使用2粒BL1850B型电池的可清洁500m2的面积

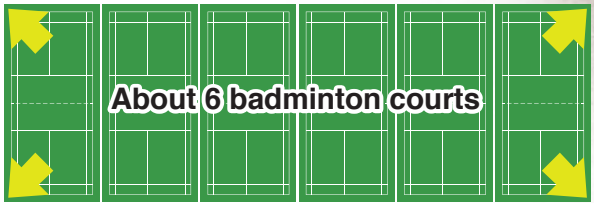

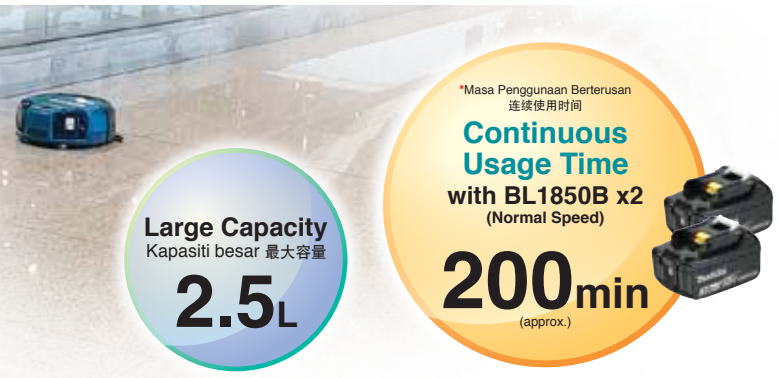

DRC200Z
RM 11,285

Robotic Cleaner
Pembersih Robotik
充电式智能吸尘机



18V



- **Able to clean an area of 300m² per 120 min with a coverage rate of 80%**

Standard Equipment: Wireless remote controller (including two AAA alkaline batteries), Side Brush, Boundary Tape

- Z : Without Charger & Battery

BL MOTOR

DRC200 VIDEO CLIP Models and specs may vary by country

Max Cleaning Area Kawasan Pembersihan Maksimum 最大清洁面积	**BL1850B x2 : 500m²**
Max Running Speed Kelajuan Operasi Maksimum 最大运行速度	**0.3m/ sec**
Dust Box Capacity Kapasiti 容量	**2.5L**
Dimensions (L x W x H) Dimensi 体积	**460x460x180mm** **(18-1/8"x18-1/8"x7-1/8")**
Net Weight Berat Bersih 淨重	**7.3kg (16.1lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**200 min with BL1850B x2**

***All list price shown are for reference only (exclude SST).**
*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V X2 36V | 18V | LXT® | Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5


Cordless Upright Cleaner

Pembersih Tegak Tanpa Kord 充电直立式吸尘器

High dust pick-up rate

4 rows of V-shaped bristle increase dust pick-up rate, suction power is even across the entire cleaning width due to the suction port located at the center

Sedutan tinggi
Port sedutan terletak di tengah, daya sedutan diagihkan secara merata di port penyedut bersih
高吸力
由於吸口位於中央，因此吸力平均分佈在整個清潔吸口





Max Sealed Suction
Sedutan Terkedap (Turus Air)
最大密封吸力(水柱)
12kPa

Two different BL motors

- One for vacuuming dust and the other for rotating brushroll
- Two motors are separately controlled according to the selected suction mode

Dua motor tanpa berus secara berasingan mengawal pengumpulan habuk dan putaran berus
两个无碳刷马达分别控制吸尘及毛刷旋转



*Masa Penggunaan Berterusan 连续使用时间
Continuous Usage Time with BL1860B x2 (Low Noise)
120min (approx.)



DVC560Z
RM 3,647

Cordless Upright Cleaner
Pembersih Tegak Tanpa Kord
充电直立式吸尘器





- **Low noise mode allows for use in noise-sensitive environments such as office, hospital and more**

Standard Equipment: Long Sash Nozzle, Round Brush, Filter Bag, Filter H (HEPA Filter)


- Z: Without Charger & Battery

DVC560 VIDEO CLIP Models and specs may vary by country

Capacity Kapasiti 尘袋容量	**Dust: 5L**
Max Air Flow Aliran Udara 最大空气流量	**1.9m³/min**
Max Sealed Suction Sedutan Terkedap 最大密封吸力	**12kPa**
Suction Power Kuasa Sedutan 吸力	**Max: 85W | Normal: 50W | Low Noise: 25W**
Dust Pick-Up Rate Kadar Pengumpulan Debu 除尘率	**Max: 47 | Normal: 44 | Low Noise: 40**
Cleaning Width Lebar Pembersihan 清洁宽度	**318mm**
Brushroll Rotation Speed Kelajuan Putaran Brushroll 毛刷转速	**Max: 3,500RPM | Normal: 2,500RPM | Low Noise: 1,000RPM**
Dimensions (L x W x H) Dimensi 体积	**326x318x1,146mm (12-7/8x12-1/2x45")**
Net Weight Berat Bersih 净重	**8.3 - 9.0kg (18.3 - 19.8lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Max: 25 min | Normal: 50 min | Low Noise: 100 min with BL1850B x2**

DCL501Z
RM 2,605

Cordless Cyclone Cleaner
Pembersih Vakum Cyclone Tanpa Kord
充电式旋风吸尘机





- **Quiet operation for operator comfort**

Standard Equipment: Shoulder Belt, Crevice Nozzle, Cleaning Brush, Floor Nozzle, Zoom Pipe, Hose, Hose Hook

- Z: Without Charger & Battery

Capacity Kapasiti 容量	**250mL**
Max Air Flow Aliran Udara 最大空气流量	**1.2m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**10kPa (1,020mmH_2O)**
Suction Power Kuasa Sedutan 吸力	**High: 75W | Low: 25W**
Dimensions (L x W x H) Dimensi 体积	**352x189x252mm (13-7/8"x7-7/16"x9-7/8")**
Net Weight Berat Bersih 净重	**3.1kg (6.8 lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 64 min | High: 29 min with BL1850B**

DCL500Z
RM 1,970

Cordless Cyclone Cleaner
Pembersih Vakum Cyclone Tanpa Kord
充电式旋风吸尘机





- **HEPA Clean Filter offers maximum performance for residential and commercial applications**

Standard Equipment: Shoulder Belt, Crevice Nozzle, Floor Nozzle, Zoom Pipe, Hose, Hose Hook

- Z: Without Charger & Battery

DVC860/DCL500 VIDEO CLIP Models and specs may vary by country

Capacity Kapasiti 容量	**250mL**
Max Air Flow Aliran Udara 最大空气流量	**1.3m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**6.6kPa (660mmH_2O)**
Suction Power Kuasa Sedutan 吸力	**High: 75W | Low: 25W**
Dimensions (L x W x H) Dimensi 体积	**352x189x252mm (13-7/8"x7-7/16"x9-7/8")**
Net Weight Berat Bersih 净重	**3.6kg (7.9 lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 50 min | High: 20 min with BL1850B**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

CAPSULE TYPE
Jenis Kapsul 胶囊型



No need to use paper bag.
This is a cost saving for repeated use
Tidak perlu menggunakan beg debu kertas, boleh digunakan semula untuk menjimatkan kos
无需纸集尘袋，可重复使用以节省成本

TRIGGER SWITCH
Suis Pemicu 扳机开关



Ergonomic Handle With Easy On/ Off Trigger Switch
Pemegang ergonomik dengan suis pemicu hidup/ mati mudah 符合人体工程学的手柄，扳机开关



Filter
Penapis 过滤器

Pre Filter
Penapis Depan 前置过滤器

OR



Easy shake off dust filter

High Performance Filter
Penapis prestasi tinggi 高效过滤器


OR



Easy shake off filter B set

HEPA filter Filter H set

For all **LXT** & **CXT** range using capsule type (**18V** & **12Vmax** only)

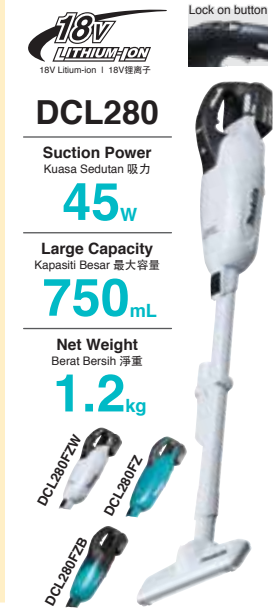

CAPSULE TYPE
Jenis Kapsul 胶囊型



No need to use paper bag.
This is a cost saving for repeated use
Tidak perlu menggunakan beg debu kertas, boleh digunakan semula untuk menjimatkan kos
无需纸集尘袋，可重复使用以节省成本

SWITCH BUTTON
Butang Suis 开关按钮



Simply push a power on button for continuous use
Hanya tekan butang kuasa untuk kegunaan berterusan 一按式开关就能持续使用



Filter
Penapis 过滤器

Pre Filter
Penapis Depan 前置过滤器

OR



Easy shake off dust filter

High Performance Filter
Penapis prestasi tinggi 高效过滤器


OR



Easy shake off filter B set

HEPA filter Filter H set

For all **LXT** & **CXT** range using capsule type (**18V** & **12Vmax** only)

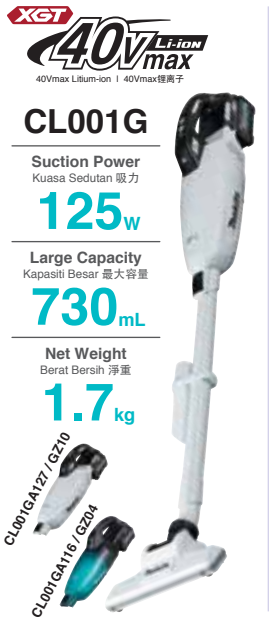

DUST BAG TYPE
Beg Debu Penapis 尘袋型



Simply by open the front cover for easy dust bag change
Hanya dengan membuka penutup depan untuk menukar beg habuk dengan mudah
打开前盖，简便更换尘袋

SWITCH BUTTON
Butang Suis 开关按钮



Simply push a power on button for continuous use
Hanya tekan butang kuasa untuk kegunaan berterusan 一按式开关就能持续使用



Paper Filter
Penapis Kertas 纸制尘袋

OR



Dust Bag
Beg habuk 集尘袋

OR



Easy shake off dust bag

High Performance Dust Bag
Beg habuk prestasi tinggi 高效集尘袋



***All list price shown are for reference only (exclude SST).**
*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

12Vmax LITHIUM-ION
12V Litium-ion | 12V锂离子

CL106FD

Suction Power
Kuasa Sedutan 吸力
19W

Large Capacity
Kapasiti Besar 最大容量
600mL

Net Weight
Berat Bersih 淨重
1.0kg




10.8V LITHIUM-ION
10.8V Litium-ion | 10.8V锂离子

CL100D

Suction Power
Kuasa Sedutan 吸力
14W

Large Capacity
Kapasiti Besar 最大容量
600mL

Net Weight
Berat Bersih 淨重
0.88kg

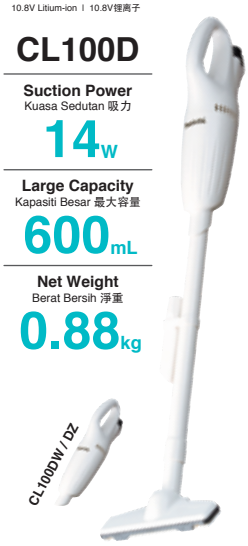


10.8V LITHIUM-ION
10.8V Litium-ion | 10.8V锂离子
BUILT-IN LITHIUM-ION BATTERY

CL111D

Suction Power
Kuasa Sedutan 吸力
21W

Large Capacity
Kapasiti Besar 最大容量
560mL

Net Weight
Berat Bersih 淨重
0.94kg

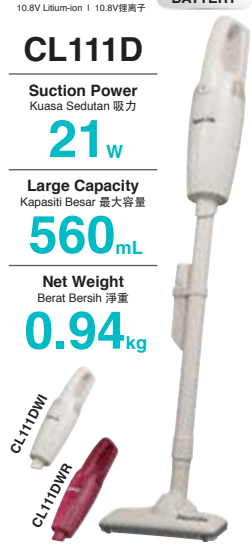


7.2V LITHIUM-ION
7.2V Litium-ion | 7.2V锂离子

CL070D

Suction Power
Kuasa Sedutan 吸力
14W

Large Capacity
Kapasiti Besar 最大容量
600mL

Net Weight
Berat Bersih 淨重
0.81kg

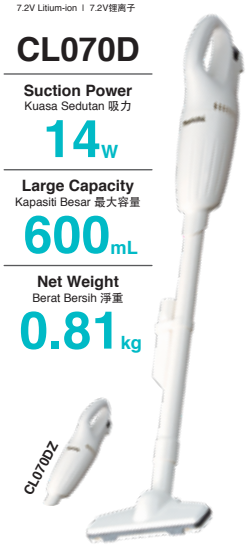

12Vmax LITHIUM-ION
12V Litium-ion | 12V锂离子

CL108FD

Suction Power
Kuasa Sedutan 吸力
30W

Large Capacity
Kapasiti Besar 最大容量
600mL

Net Weight
Berat Bersih 淨重
1.0kg



12Vmax LITHIUM-ION
12V Litium-ion | 12V锂离子

CL107FD

Suction Power
Kuasa Sedutan 吸力
32W

Large Capacity
Kapasiti Besar 最大容量
500mL

Net Weight
Berat Bersih 淨重
1.1kg



12Vmax LITHIUM-ION
12V Litium-ion | 12V锂离子
BUILT-IN LITHIUM-ION BATTERY

CL114FD

Suction Power
Kuasa Sedutan 吸力
35W

Large Capacity
Kapasiti Besar 最大容量
500mL

Net Weight
Berat Bersih 淨重
1.1kg




10.8V LITHIUM-ION
10.8V Litium-ion | 10.8V锂离子

CL102D

Suction Power
Kuasa Sedutan 吸力
14W

Large Capacity
Kapasiti Besar 最大容量
500mL

Net Weight
Berat Bersih 淨重
1.1kg

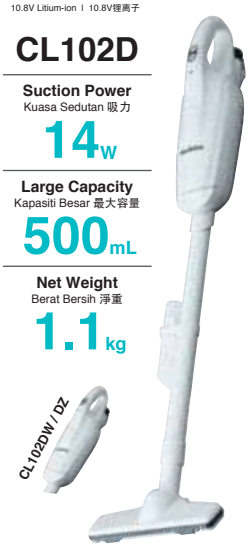

10.8V LITHIUM-ION
10.8V Litium-ion | 10.8V锂离子
BUILT-IN LITHIUM-ION BATTERY

CL104D
CL105D

Suction Power
Kuasa Sedutan 吸力
20W

Large Capacity
Kapasiti Besar 最大容量
500mL

Net Weight
Berat Bersih 淨重
1.1kg



***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

40Vmax Li-ion XGT

Li-ion Ah 5.0 | 4.0 | 2.5 | 2.0

*Compatible batteries

Cordless Cleaner

Pembersih Vakum Tanpa Kord 充电式便携吸尘机

Redesigned Floor/ Carpet T-nozzle

Muncung berbentuk T lantai / permaidani yang direka bentuk semula
重新设计的地板/地毯 T型吸嘴

- Redesigned structure reduces the resistance caused by suction, providing smooth running
  Struktur yang direka bentuk semula mengurangkan rintangan yang disebabkan oleh daya sedutan dan berjalan dengan lancar
  重新设计的结构减少了吸力带来的阻力，运行平稳
- Redesigned inside air flow path reduces the noise made inside the nozzle
  Laluan aliran udara dalaman yang direka semula mengurangkan bunyi di dalam muncung
  重新设计的内部气流路径减少了吸嘴内部的噪音




LED job light
also functions as a battery capacity warning lamp
Lampu kerja LED juga berfungsi sebagai lampu amaran kapasiti bateri
LED工作灯也可作为电池容量警告灯

Dust Capacity
Kapasiti Habuk 集尘容量
730mL

Cyclone attachment (optional)

Centrifugal force separates fine dust, allowing the main unit of the cleaner to require about 80% less frequent dust disposal
Daya sentrifugal memisahkan debu halus, mengurangkan kekerapan pembersihan penapis kira-kira 80%
离心力将细小的灰尘分开，使清洁器的主机减少了大约80％的频繁灰尘处理



Cyclone pre-separation system separates dust from air
Sistem pra-pemisahan siklon memisahkan debu dari udara
旋风分离系统将灰尘与空气隔离



Easy disposal of the fine dust collected in dust case
Debu halus dikumpulkan dalam pengumpul habuk mudah dibersihkan
集尘箱中收集的细粉尘方便处理



Pipe locking mechanism

Pipe is fixed with the locking mechanism to prevent it from accidentally coming off
Paip dengan mekanisme pengunci untuk mengelakkan ketanggalan yang tidak disengajakan
管道通过锁定机构固定，以防止其意外脱落

HEPA filter is available (Optional Accessories)

HEPA filter



Pre-filter		Easy shake off filter B set		HEPA filter
	or		+	

Suction Power
Kuasa Sedutan 吸力
Mode 4
125W

*Masa Penggunaan Berterusan 连续使用时间
Continuous Usage Time
with BL4040
(Mode 1)
128min
(approx.)



CL001GA127	CL001GA116	CL001GZ04	CL001GZ10
RM 2,188	RM 2,188	RM 985	RM 985

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式吸尘机



40Vmax



- **Increased 125W suction power achieved by using 40Vmax XGT battery**

Standard Equipment: Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Easy Shake Off Filter B set

- GA127: 1x Standard Charger, 1x 2.0Ah Battery (White)
- GA116: 1x Standard Charger, 1x 2.0Ah Battery (Black)
- GZ04: Without Charger & Battery (Black)
- GZ10: Without Charger & Battery (White)

XGT BL MOTOR

Capacity Kapasiti 容量	**730mL**
Max Air Flow Aliran Udara 最大空气流量	**1.2m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**21kPa (2,100mmH₂O)**
Suction Power Kuasa Sedutan 吸力	**4: 125W | 3: 70W | 2: 45W | 1: 20W with Easy Shake Off Filter**
Dimensions (L x W x H) Dimensi 体积	**1,066x113x152mm (42x4-7/16x6")**
Net Weight Berat Bersih 净重	**1.7 - 2.3 kg (3.5 - 5.1 lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**4: 25 min | 3: 40 min | 2: 64 min | 1: 128 min with BL4040**

***All list price shown are for reference only (exclude SST).**
*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

Cordless Cleaner

Pembersih Vakum Tanpa Kord 充电式便携吸尘机



*Masa Penggunaan Berterusan
连续使用时间
Continuous Usage Time with BL1830B (Normal Speed) 50min (approx.)

Suction Power
Kuasa Sedutan 吸力
Max: 60w



One-touch push button switch
Suis butang satu sentuhan
一键式按钮开关

LED job light
Lampu kerja LED
LED工作灯

Dust Capacity
Kapasiti Habuk 集尘容量
500mL

Pipe lock
Pipe is fixed with the locking mechanism to prevent it from accidentally coming off
Paip dengan mekanisme pengunci untuk mengelakkan ketanggalan yang tidak disengajakan
管道通过锁定机构固定，以防止其意外脱落

DCL282FZW | DCL282FZ

RM 858 | RM 858

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式吸尘机





- **Increased suction power achieved by using highly efficient BL motor**

Standard Equipment: Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Easy Shake Off Dust Bag, Paper Dust Bag, Hand Strap

- FZW: Without Charger & Battery (White)
- FZ: Without Charger & Battery (Blue)

Capacity Kapasiti 容量	**Normal Dust Bag: 500mL Paper Dust Bag: 330mL**
Max Air Flow Aliran Udara 最大空气流量	**1.5m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**8.2kPa (820mmH$_2$O)**
Suction Power Kuasa Sedutan 吸力	**Max: 60W | High: 45W | Normal: 15W with Normal Dust Bag**
Dimensions (L x W x H) Dimensi 体积	**1,016 x 114 x 154 mm (40 x 4-1/2 x 6-1/16")**
Net Weight Berat Bersih 净重	**1.3 - 1.6 kg (2.8 - 3.5 lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Normal: 50 min | High: 20 min | Max: 15 min with BL1830B**

DCL281FZW | DCL281FZB | DCL281FZ

RM 840 | RM 840 | RM 840

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机





- **Increased suction power achieved by using highly efficient BL motor**

Standard Equipment: Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Prefilter, Filter H Set (HEPA Filter)


- FZW: Without Charger & Battery (White)
- FZB: Without Charger & Battery (Black)
- FZ: Without Charger & Battery (Blue)

Capacity Kapasiti 容量	**750mL**
Max Air Flow Aliran Udara 最大空气流量	**1.5m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**8.2kPa (820mmH$_2$O)**
Suction Power Kuasa Sedutan 吸力	**Max: 60W | High: 45W | Normal: 15W with Normal Filter**
	Max: 55W | High: 40W | Normal: 13W with Easy Shake Off Filter
Dimensions (L x W x H) Dimensi 体积	**1,016x113x154mm (40"x4-7/16"x6-1/16")**
Net Weight Berat Bersih 净重	**1.2 - 1.6kg (2.7 - 3.5lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Max: 25 min | High: 33 min | Normal: 83 min with BL1850B**

DCL280FZW | DCL280FZB | DCL280FZ

RM 715 | RM 715 | RM 715

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机





- **Increased suction power achieved by using highly efficient BL motor**

Standard Equipment: Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Prefilter, Filter H Set (HEPA Filter)

- FZW: Without Charger & Battery (White)
- FZB: Without Charger & Battery (Black)
- FZ: Without Charger & Battery (Blue)

Capacity Kapasiti 容量	**750mL**
Max Air Flow Aliran Udara 最大空气流量	**1.4m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**6.4kPa (640mmH$_2$O)**
Suction Power Kuasa Sedutan 吸力	**Normal Filter: 45W Easy Shake Off Filter: 40W**
Dimensions (L x W x H) Dimensi 体积	**1,016x113x154mm (40"x4-7/16"x6-1/16")**
Net Weight Berat Bersih 净重	**1.2 - 1.6kg (2.7 - 3.5lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**33 min with BL1850B**


***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT® Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

DCL181FZWX
RM 632

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机





- **Strong suction power for fast cleaning with more run time**


Standard Equipment: Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Filter, Prefilter, Stay

- FZWX: Without Charger & Battery (White)

Capacity Kapasiti 容量	**650mL**
Max Air Flow Aliran Udara 最大空气流量	**1.4m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**5.3kPa (540mmH$_2$O)**
Suction Power Kuasa Sedutan 吸力	**High: 30W | Low: 11W**
Dimensions (L x W x H) Dimensi 体积	**999x114x152mm (39-1/4"x4-1/2"x6")**
Net Weight Berat Bersih 淨重	**1.2 - 1.4kg (2.7 - 3.1lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 66 min | High: 33 min with BL1850B**

DCL180FRFW | DCL180RFB | DCL180ZB | DCL180Z
DCL180FRFW RM 1,143 | DCL180RFB RM 1,143 | DCL180ZB RM 487 | DCL180Z RM 487

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机





- **Strong suction power for fast cleaning**

Standard Equipment:
FRFW: Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Stay, Easy Shake Off Filter
RFB / ZB / Z: Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Stay, Filter, Prefilter

- FRFW: 1x Rapid Charger, 1x 3.0Ah Battery (White)
- RFB: 1x Rapid Charger, 1x 3.0Ah Battery (Black)
- ZB: Without Charger & Battery (Black)
- Z: Without Charger & Battery (Blue)


Only for DCL180FRFW


DCL180 VIDEO CLIP Models and specs may vary by country

Capacity Kapasiti 容量	**650mL**
Max Air Flow Aliran Udara 最大空气流量	**1.4m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**4.2kPa (428mmH$_2$O)**
Suction Power Kuasa Sedutan 吸力	**30W**
Dimensions (L x W x H) Dimensi 体积	**999x114x152mm (39-1/4"x4-1/2"x6")**
Net Weight Berat Bersih 淨重	**1.2kg (2.7 lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**33 min with BL1850B**

DCL182FRFW | DCL182FZW
DCL182FRFW RM 1,305 | DCL182FZW RM 648

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机



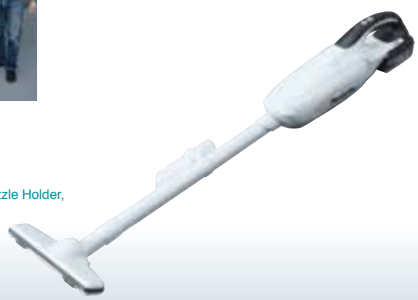

- **Improved front cover opens with push button for easier access**

Standard Equipment: Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Dust Bag, Paper Dust Bag 5pcs

- FRFW: 1x Rapid Charger, 1x 3.0Ah Battery (White)
- FZW: Without Charger & Battery (White)

Capacity Kapasiti 容量	**Dust Bag: 500mL Paper Pack: 330mL**
Max Air Flow Aliran Udara 最大空气流量	**1.4m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**5.4kPa (551mmH$_2$O)**
Suction Power Kuasa Sedutan 吸力	**High: 30W | Low: 11W**
Dimensions (L x W x H) Dimensi 体积	**1,004x115x151mm (39-1/2"x4-1/2"x5-15/16")**
Net Weight Berat Bersih 淨重	**1.3kg (2.8 lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 66 min | High: 33 min with BL1850B**

DVC750LZ | DVC750LZX1
DVC750LZ RM 1,507 | DVC750LZX1 RM 1,532

Cordless Portable Vacuum Cleaner (Wet & Dry)
Pembersih Vakum Tanpa Kord (Basah dan Kering)
充电式轻便吸尘机(干湿两用)



WET Basah 湿
DRY Kering 干

DVC750 VIDEO CLIP Models and specs may vary by country



- **Two tools in one; quickly converts from vacuum to blower for increased versatility**

Stok mesin ada 售完即止 WHILE STOCK LAST

Standard Equipment: Hose, Wide Nozzle, Sash Nozzle, HEPA Filter (162518-0) (Dry Only)

- LZ: Without Charger & Battery
- LZX1: 1x Shoulder Belt, Without Charger & Battery

BL MOTOR XPT HEPA filter

Capacity Kapasiti 容量	**Dust: 7.5L**
Max Air Flow Aliran Udara 最大空气流量	**High:1.6m³/min | Normal: 1.3m³/min**
Max Sealed Suction Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**High: 6.7kPa | Normal: 4.2kPa**
Suction Power Kuasa Sedutan 吸力	**High: 50W | Normal: 25W**
Dimensions (L x W x H) Dimensi 体积	**418x251x278mm (16-1/2"x9-7/8"x11")**
Net Weight Berat Bersih 淨重	**4.3 - 4.6kg (9.4 - 10.1 lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Normal: 60 min | High: 30 min with BL1850B**

ACCESSORIES (Optional)
Wet Filter Set (Wet Only)
Part No. 191M39-3



DVC350Z
RM 1,808

Cordless Vacuum Cleaner
Pembersih Vakum Tanpa Kord
充电式吸尘机





- **Large 3L dust bag capacity**

Standard Equipment: Nozzle assembly, Dust Bag Assembly, Hose, Shoulder Belt

- Z: Without Charger & Battery

Max Peak Air Flow Aliran Udara 最大空气流量	**3.4m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**5.5kPa (560mmH$_2$O)**
Recoverable Capacity Kapasiti 容量	**Dust: 3L**
Dimensions (L x W x H) Dimensi 体积	**273x195x226mm (10-3/4"x7-5/8"x8-7/8")**
Net Weight Berat Bersih 淨重	**2.2kg (4.8lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 43 min | High: 22 min with BL1850B**

DVC350/DVC260 VIDEO CLIP Models and specs may vary by country

***All list price shown are for reference only (exclude SST).**
*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

18V LXT 12Vmax CXT Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

Cordless Cleaner

Pembersih Vakum Tanpa Kord 充电式吸尘机



Mat Nozzle 120



Seat Nozzle 120



Rubber Nozzle 330



Soft Brush 360



Blower Nozzle



DCL184Z

RM 965

Cordless Cleaner

Pembersih Vakum Tanpa Kord

充电式吸尘机



18V



- **Higher suction power and longer continuous run time**

Standard Equipment:
Seat Nozzle, Mat Nozzle, Rubber Nozzle, Soft Brush, Blower Attachment, Dust Bag, Paper Dust Bag 5pcs (194566-1), Shoulder Belt

- Z: Without Charger & Battery

DCL184 VIDEO CLIP Models and specs may vary by country

Capacity Kapasiti 容量	**Cloth Dust Bag: 500mL Paper Dust Bag: 330mL**
Max Air Flow Aliran Udara 最大空气流量	**1.4m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**5.4kPa (550mmH$_2$O)**
Suction Power Kuasa Sedutan 吸力	**Max: 38W | High: 23W | Normal: 5W**
Dimensions (L x W x H) Dimensi 体积	**365x138x202mm (14-3/8x5-7/16x8")**
Net Weight Berat Bersih 净重	**1.8 - 2.2kg (4.0 - 4.9lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Max: 33 min | High: 50 min | Normal: 133 min with BL1850B**

CL121DZ

RM 965

Cordless Cleaner

Pembersih Vakum Tanpa Kord

充电式吸尘机



12Vmax



- **Comes with a variety of special nozzles optimum for cleaning car interior**

Standard Equipment: Mat Nozzle, Seat Nozzle, Rubber Nozzle, Soft Brush, Blower Nozzle, Dust Bag, Paper Dust Bag 5pcs (194566-1), Shoulder Belt

- DZ : Without Charger & Battery

CL121D VIDEO CLIP Models and specs may vary by country

Capacity Kapasiti 容量	**Dust Bag: 500mL Paper Pack: 330mL**
Max Air Flow Aliran Udara 最大空气流量	**1.3m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**4.6kPa (470 mmH$_2$O)**
Suction Power Kuasa Sedutan 吸力	**Max: 28W | High: 19W | Normal: 5W**
Dimensions (L x W x H) Dimensi 体积	**345x138x202mm (13-5/8"x5-7/16"x8")**
Net Weight Berat Bersih 净重	**1.7 - 1.8kg (3.7 - 4.0lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Normal: 67 min | High: 32 min | Max: 27 min with BL1041B**

CL108FDWYW | CL108FDZW

RM 937 | RM 582

Cordless Cleaner

Pembersih Vakum Tanpa Kord

充电式便携吸尘机



12Vmax



- **Compact and High Suction Power**

Standard Equipment: Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Filter, Prefilter

- FDWYW: 1x Standard Charger, 1x 1.5Ah Battery (White)
- FDZW: Without Charger & Battery (White)

Capacity Kapasiti 容量	**600mL**
Max Air Flow Aliran Udara 最大空气流量	**1.2m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**4.4kPa (445mmH$_2$O)**
Suction Power Kuasa Sedutan 吸力	**Max: 30W | High: 20W | Normal: 5W**
Dimensions (L x W x H) Dimensi 体积	**956x110x150mm (37-5/8"x4-5/16"x5-7/8")**
Net Weight Berat Bersih 净重	**1.0 - 1.2kg (2.3 - 2.7lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Normal: 33 min | High: 16 min | Max: 13 min with BL1021B**

CL106FDWYW | CL106FDZW

RM 820 | RM 465

Cordless Cleaner

Pembersih Vakum Tanpa Kord

充电式便携吸尘机



12Vmax



- **Stronger suction power for faster cleaning with more run time**

Standard Equipment: Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Filter, Prefilter

- FDWYW: 1x Standard Charger, 1x 1.5Ah Battery (White)
- FDZW: Without Charger & Battery (White)

Capacity Kapasiti 容量	**600mL**
Max Air Flow Aliran Udara 最大空气流量	**1.3m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**3.1kPa (316mmH$_2$O)**
Suction Power Kuasa Sedutan 吸力	**19W**
Dimensions (L x W x H) Dimensi 体积	**958x100x150mm (37-3/4"x3-15/16"x5-7/8")**
Net Weight Berat Bersih 净重	**1.0kg (2.2 lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**21 min with BL1021B**

***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

12Vmax CXT® 10.8V Li-ion Ah 2.0 1.3

CL107FDWYW | CL107FDZW
RM 982 | RM 628

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机



12Vmax

- **3 mode suction power settings**

Standard Equipment: Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Dust Bag, Paper Dust Bag 5pcs (194566-1)

- FDWYW: 1x Standard Charger, 1x 1.5Ah Battery (White)
- FDZW: Without Charger & Battery (White)




CL107FD

VIDEO CLIP
Models and specs may vary by country

Capacity Kapasiti 容量	**Dust Bag: 500mL** **Paper Pack: 330mL**
Max Air Flow Aliran Udara 最大空气流量	**1.4m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**5.0kPa (510mmH_2O)**
Suction Power Kuasa Sedutan 吸力	**Max: 32W | High: 20W | Normal: 5W**
Dimensions (L x W x H) Dimensi 体积	**960x112x150mm** **(37-3/4"x4-3/8"x5-7/8")**
Net Weight Berat Bersih 净重	**1.1kg (2.5lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Normal: 25 min | High: 12 min | Max: 10 min with BL1021B**

CL114FDWI
RM 648

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机



12Vmax **With Built-in Battery**
Dengan Bateri Terbina Dalam
内置電池

- **Much higher 35W suction power due to 2.0Ah battery**

Standard Equipment: Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Dust Bag, Paper Dust Bag 5pcs (194566-1)

- DWI: 1x Standard Charger, Built-in 2.0Ah Battery (White)



Capacity Kapasiti 容量	**Cloth Dust Bag: 500mL** **Paper Dust Bag: 330mL**
Max Air Flow Aliran Udara 最大空气流量	**1.4m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**5.0kPa (510mmH_2O)**
Suction Power Kuasa Sedutan 吸力	**Powerful: 35W | High: 20W | Low: 5W**
Dimensions (L x W x H) Dimensi 体积	**983x113x136mm** **(38-3/4x4-7/16x5-3/8")**
Net Weight Berat Bersih 净重	**1.1kg (2.4lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Normal: 55 min | High: 18 min | Powerful: 10 min with Built-in Lithium-ion Battery**

CL100DW | CL100DZ
RM 623 | RM 278

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机



10.8V

- **Increased storage capacity for longer time between waste disposal**

Standard Equipment: Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Filter, Prefilter

- DW: 1x Standard Charger, 1x 1.3Ah Battery (White)
- DZ: Without Charger & Battery (White)



Capacity Kapasiti 容量	**600mL**
Max Air Flow Aliran Udara 最大空气流量	**1.3m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**2.3kPa (235mmH_2O)**
Suction Power Kuasa Sedutan 吸力	**14W**
Dimensions (L x W x H) Dimensi 体积	**966x103x150mm** **(38-1/32"x4-1/16"x5-7/8")**
Net Weight Berat Bersih 净重	**0.88kg (1.94lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**12 min with BL1013**

CL102DW | CL102DZ
RM 752 | RM 428

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机



10.8V

- **Quick clean-ups with strong suction power**

Standard Equipment: Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Dust Bag, Paper Dust Bag 5pcs


- DW: 1x Standard Charger, 1x 1.3Ah Battery (White)
- DZ: Without Charger & Battery (White)



Capacity Kapasiti 容量	**Dust Bag: 500mL** **Paper Pack: 330mL**
Max Air Flow Aliran Udara 最大空气流量	**1.1m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**2.7kPa (275mmH_2O)**
Suction Power Kuasa Sedutan 吸力	**High: 14W | Low: 6W**
Dimensions (L x W x H) Dimensi 体积	**984x113x150mm** **(38-3/4"x4-7/16"x5-7/8")**
Net Weight Berat Bersih 净重	**1.1kg (2.4lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 21 min | High: 13 min with BL1013**

CL111DWI | CL111DWR
RM 895 | RM 895

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机




10.8V **With Built-in Battery**
Dengan Bateri Terbina Dalam
内置電池

- **LED light indicates when to charge battery**

Standard Equipment: Nozzle for Flooring & Carpet, Sash Nozzle, Sash Nozzle Holder, Pipe, Adapter

- DWI (Ivory): 1x Standard Charger, Built-in 1.5Ah Battery, Dust Bag, Paper Dust Bag 5pcs
- DWR (Red): 1x Standard Charger, Built-in 1.5Ah Battery, Filter, Prefilter

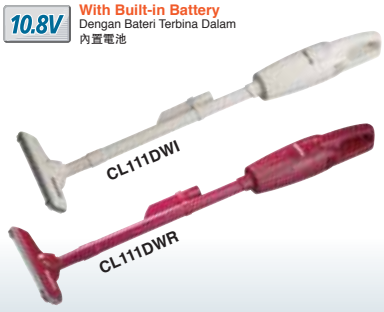

Capacity Kapasiti 容量	**560mL**
Max Air Flow Aliran Udara 最大空气流量	**1.4m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**3.4kPa (350mmH_2O)**
Suction Power Kuasa Sedutan 吸力	**21W**
Dimensions (L x W x H) Dimensi 体积	**906x102x109mm** **(35-3/4"x4"x4-1/4")**
Net Weight Berat Bersih 净重	**0.94kg (2.1lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**12 min with Built-in Lithium-ion Battery**


***All list price shown are for reference only (exclude SST).**

*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。


18V LXT® 10.8V 7.2V Li-ion Ah 1.5 1.3

CL104DWYX | CL104DWY
RM 590 | RM 590

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机



10.8V **With Built-in Battery**
Dengan Bateri Terbina Dalam
内置電池

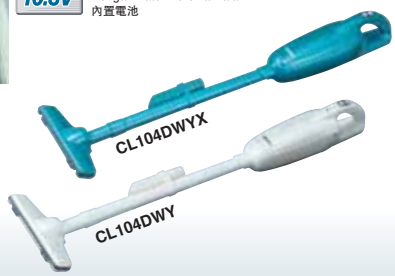

- **Increased storage capacity for longer time between waste disposal**


Standard Equipment: Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Dust Bag, Adapter (DC1001), Paper Dust Bag 5pcs (194566-1)

- DWYX: 1x Standard Charger, Built-in 1.5Ah Battery (Blue)
- DWY: 1x Standard Charger, Built-in 1.5Ah Battery (White)


Capacity Kapasiti 容量	**Dust Bag: 500mL Paper Pack: 330mL**
Max Air Flow Aliran Udara 最大空气流量	**1.1m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**3.3kPa (340mmH$_2$O)**
Suction Power Kuasa Sedutan 吸力	**Turbo: 20W | High: 14W | Low: 5W**
Dimensions (L x W x H) Dimensi 体积	**983x113x136mm (38-3/4"x4-7/16"x5-3/8")**
Net Weight Berat Bersih 淨重	**1.1kg (2.3lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 30 min | High: 15 min | Turbo: 10 min with Built-in Lithium-ion Battery**

CL105DW | CL105DWX
RM 570 | RM 570

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机



10.8V **With Built-in Battery**
Dengan Bateri Terbina Dalam
内置電池

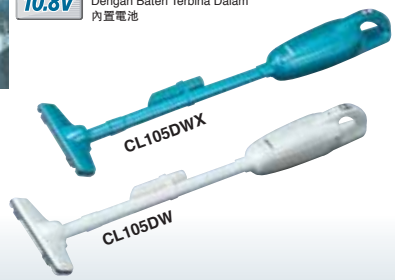

- **Strong suction power of 20W**

Standard Equipment: Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Dust Bag, Adapter (DC1001), Paper Dust Bag 5pcs (194566-1)

- DW: 1x Standard Charger, Built-in 1.3Ah Battery (White)
- DWX: 1x Standard Charger, Built-in 1.3Ah Battery (Blue)

Capacity Kapasiti 容量	**Dust Bag: 500mL Paper Pack: 330mL**
Max Air Flow Aliran Udara 最大空气流量	**1.1m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**3.3kPa (340mmH$_2$O)**
Suction Power Kuasa Sedutan 吸力	**Turbo: 20W | High: 14W | Low: 5W**
Dimensions (L x W x H) Dimensi 体积	**983x113x136mm (38-3/4"x4-7/16"x5-3/8")**
Net Weight Berat Bersih 淨重	**1.1kg (2.3lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**Low: 20 min | High: 10 min | Turbo: 7 min with Built-in Lithium-ion Battery**

CL070DZ
RM 263

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机



7.2V



- **Increased storage capacity for longer time between waste disposal**


Standard Equipment: Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Filter, Prefilter

- DZ: Without Charger & Battery (White)

Capacity Kapasiti 容量	**600mL**
Max Air Flow Aliran Udara 最大空气流量	**1.2m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**1.8kPa (180mmH$_2$O)**
Suction Power Kuasa Sedutan 吸力	**14W**
Dimensions (L x W x H) Dimensi 体积	**966x103x142mm (38-1/32"x4-1/16"x5-5/8")**
Net Weight Berat Bersih 淨重	**0.81kg (1.8lbs)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**8 min with BL7010**

CL183DZX
RM 272

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机



18V **G-Battery**



- **Compact and lightweight design**

Standard Equipment: Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Filter, Prefilter

- DZX : Without Charger & Battery

Capacity Kapasiti 容量	**600mL**
Max Air Flow Aliran Udara 最大空气流量	**1.3m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**2.6kPa (270mmH$_2$O)**
Suction Power Kuasa Sedutan 吸力	**17W**
Dimensions (L x W x H) Dimensi 体积	**966x102x148mm (38"x4"x5-7/8")**
Net Weight Berat Bersih 淨重	**1.2kg (2.6lbs.)**
Continuous Usage Time (approx.) Masa Penggunaan Berterusan 连续使用时间	**30 min with BL1815G**

***All list price shown are for reference only (exclude SST).**
*Semua harga yang ditunjukkan adalah untuk rujukan sahaja (tidak termasuk SST). 所有显示的建议零售价仅供参考（不包括SST）。

Centrifugal force separates fine dust, allowing the main unit of the cleaner to require about 80% less frequent dust disposal

Daya sentrifugal memisahkan debu halus, mengurangkan kekerapan pembersihan penapis kira-kira 80%

离心力将细小的灰尘分开，使清洁器的主机减少了大约80%的频繁灰尘处理



Cyclone pre-separation system separates dust from air

Sistem pra-pemisahan siklon memisahkan debu dari udara

旋风分离系统将灰尘与空气隔离



Easy disposal of the fine dust collected in dust case

Debu halus dikumpulkan dalam pengumpul habuk mudah dibersihkan

集尘箱中收集的细粉尘方便处理



The main unit of the cleaner requires much less frequent dust disposal

Mangurangkan kekerapan pembersihan pengumpul habuk

减少清空集尘箱频率

Cyclone Attachment Set

Set Pengumpul Habuk Siklon 旋风集尘配件

Pipe lock

DCL280F, DCL281F, DCL282F

Part No.191D71-3 (White)
Part No.191D73-9 (Black)



Dust capacity **400mL** / Net weight **0.36kg**

CL106FD, CL107FD, CL108FD, DCL180, DCL181F, DCL182, CL183D

Part No.199491-1 (White)
Part No.191D75-5 (Black)



Dust capacity **400mL** / Net weight **0.35kg**

Easily fitting

Mudah dipasang 轻松拟合



With short pipe (Part No.191D76-3)





With short pipe (Part No.191D79-7)

Without standard pipe (Part No.451241-5)

By using this short pipe when attaching Cyclone attachment, you can use the cleaner with the same overall length as the cleaner without Cyclone attachment

Dengan menggunakan paip pendek ini apabila bersambung dengan set pengumpul habuk siklon, anda boleh menggunakan pembersih dengan panjang keseluruhan yang sama seperti pembersih tanpa set pengumpul habuk siklon

安装旋风集尘配件时使用此短管，可以使吸尘机的总长度与不安装旋风集尘配件的吸尘机相同

Pipe lock DCL280F, DCL281F, DCL282F

Pipe is fixed with the locking mechanism to prevent it from accidentally coming off

Paip dengan mekanisme penguncian untuk mengelakkannya dari jatuh tanpa sengaja 管锁固定以防止意外脱落



Pipe with beveled end

Cleaning of tight places can be done without nozzle by using the beveled end of pipe as a nozzle

Paip serong bertindak sebagai muncung untuk membersihkan kawasan sempit

倒角管的倾斜端作为喷嘴可以清洁狭窄的地方



Suction Power Keep 90%*



*When used with DCL182 (wood dust)

For Cleaning



Model
DVC350 / DVC860L /
DVC862L / DVC863L



Model
DVC261 / DVC265









Hose 38mm-1.5m
with front sleeve



Hose 32mm
with front sleeve
1m, 1.7m



Hose 28mm
without front sleeve
1m, 1.5m



Front cuffs 22



Hose 38mm
1.5m



Bending pipe assembly
For aluminum straight pipe with lock
*with Hose 28 sleeve



Bending pipe assembly
For plastic straight pipe
*with Hose 28 sleeve



Bending pipe



Straight pipe



Aluminum Telescopic pipe assembly
Pipe length is variably adjustable from 590 to 942mm.



Plastic Telescopic pipe assembly
Pipe length is variably adjustable from 500 to 850mm.



Tapered nozzle set



Nozzle assembly 28
Flat type



F/C switching T-nozzle 28



Floor/carpet T-nozzle



Floor T-nozzle 28



Seat nozzle 28



Corner nozzle 300-28



Crevice nozzle 415



Round brush



Shelf brush



Flexible rubber nozzle



Tapered nozzle set



Nozzle assembly 38
Flat type



F/C switching T-nozzle 38



Universal Type Nozzle assembly 38



Compact Type




Round brush




Corner nozzle



Cordless Cleaner System charts

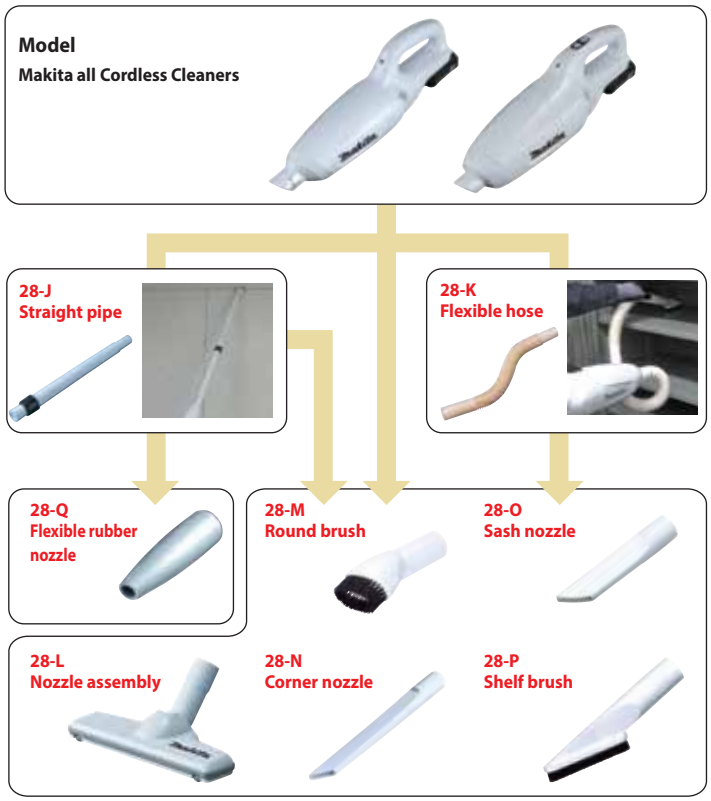

For Dust Collecting

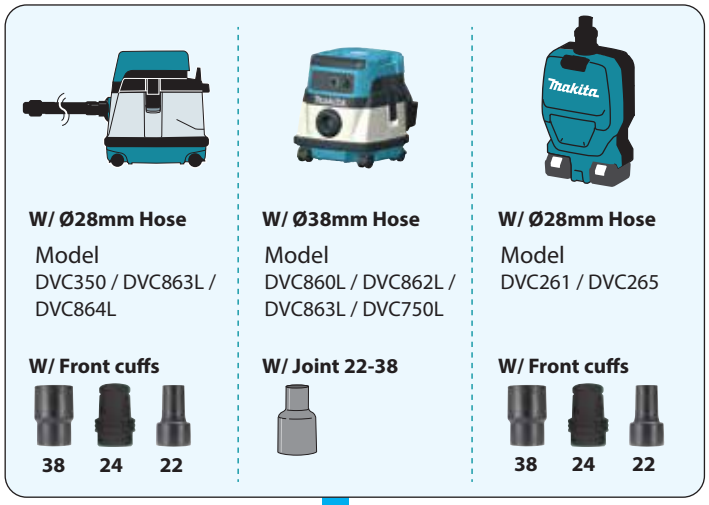



For Cordless Cleaner
28-J
Straight pipe



Description	Color	Part No.
Aluminum Telescopic pipe assembly Pipe length is variably adjustable from 590 to 942mm.	Aluminum	140G19-0
Telescopic pipe assembly 28 Pipe length is variably adjustable from 500 to 850mm.	White	198560-5
Plastic straight pipe 28	Ivory	451424-7
	White	451241-5
	Blue	451244-9
	Red	451425-5
	Black	456587-4

28-K
Flexible hose set28



Description	Color	Part No.
Flexible hose set28 Superior in flexibility and for the cleaning of the small place in the car	Ivory	191496-7
	White	198868-7
	Blue	198541-9
	Red	198542-7
	Pink	198871-8
	Black	198547-7

28-L
Nozzle assembly

Flat type





F/C switching t-nozzle 28

Description	Color	Part No.	EU Part No.
F/C switching t-nozzle 28 Flooring & carpet	White	198183-9	198532-0
F/C switching t-nozzle 28 Flooring & carpet	Blue	199431-9	-

Nozzle assembly

Floor/carpet t-nozzle
For rug / carpet cleaning



Description	Color	Part No.
Floor/carpet t-nozzle For rug / carpet cleaning	Ivory	198150-4
	White	198525-7
	Blue	198523-1
	Red	198524-9
	Pink	198883-1
	Black	198526-5

Nozzle assembly

Floor t-nozzle 28



Description	Color	Part No.
Floort-nozzle 28	Ivory	123485-4
	White	123486-2
	Blue	123488-8
	Black	123539-7
	White	122861-9
	Blue	122859-6

Nozzle assembly

For rug / carpet cleaning



Description	Color	Part No.
For rug / carpet cleaning	Ivory	122291-4

Nozzle assembly

Seat nozzle 28




Description	Color	Part No.
Seat nozzle 28 For car seat	White	199038-1
	Blue	199041-2
	Black	199039-9

28-M
Round brush 28



Color	Part No.
Ivory	198552-4
White	198878-4
Blue	198549-3
Red	198550-8
Pink	198880-7
Black	198551-6

28-N
Corner nozzle 330-28



Size	Color	Part No.
330-28mm	White	198919-6
	Blue	198990-0
	Black	198992-6

28-O
Sash nozzle 28 and Long Sash nozzle 415

Sash nozzle 28



Long Sash nozzle 415



Description	Color	Part No.
Sash nozzle 28	Ivory	416041-0
	White	451240-7
	Blue	451243-1
	Red	-
	Pink	-
	Black	456586-6
Crevice nozzle 415 set	White	199439-3

28-P
Shelf brush set 28
(For gentle cleaning by soft-tipped brush)



Color	Part No.	EU Part No.
Ivory	191724-0	198537-0
White	198872-6	198873-4
Blue	198534-6	-
Red	198535-4	-
Pink	198875-0	-
Black	198536-2	-

28-Q
Flexible rubber nozzle



Color	Part No.	EU Part No.
grey	197900-4	197901-2

28-I
Tapered nozzle set
Use with Front cutts 22 or Flexible rubber nozzle



Color	Part No.
grey	192236-6

Cordless Cleaner for Capsule type
For Model:
CL183D, DCL181F, DCL180, CL111D, CL106FD, CL070D
Filter



Pre filter





Easy shake off dust filter



Description	Per pkg.	Part No.	EU Part No.
Filter	10	198914-6	-
Pre filter	1	198750-0	198751-8
Easy shake off dust filter	1	455176-2	-

Cordless Cleaner for Paper bag type
For Model:
DCL182, CL121D, CL107FD, CL105D, CL104D, CL072D
Paper filter





Dust bag



Easy shake off dust bag



Description	Per pkg.	Part No.
Paper filter Anti-bacterial type	10	194565-3
	5	194566-1
Dust bag	1	198746-1
Easy shake off dust bag	1	198748-7

Other Cleaners
For DVC261, DVC265
Dust bag assembly



Filter bag set (Paper dust bag)



Description	Per pkg.	Part No.
Dust bag assembly	1	197898-5
Filter bag set (Paper dust bag)	10	197902-0

Hose



Description	Size	Part No.
without front sleeve	28mm-1m	143787-2

Bending pipe assembly
*with Hose 28 sleeve





Description	Part No.
For Aluminum Telescopic pipe assembly with lock	*127093-3
Bent pipe assembly for DVC260	123677-5

For CL121D

Mat nozzle 120



Seat nozzle 120 complete



Rubber nozzle 330



Soft brush 360 complete



Description	Part No.
Mat nozzle 120	459056-4
Seat nozzle 120 complete	140H95-0
Rubber nozzle 330	422437-5
Soft brush 360 complete	140H94-2

For DRC200

Boundary line tape (15m roll)



Side brushes



Power brush



Turn brush cover



Filter



Description	Part No.
Boundary line tape (15m roll)	SH00000240 (USA, AU)
Side brushes	SH00000065
Power brush	SH00000063
Turn brush cover	SH00000064
Filter	SH00000213

For DVC350

Dust bag



Part No.
122918-6

Nozzle assembly



Model No.	Size(mm)	Part No.
DVC350	220	132025-7
	430	134182-7

Quick charger

(AC only)



Model No.	Charging time (min.) (approx.)	Part No.
CL104D, CL105D, CL111D	180	DC1001 / 196832-2

For DCL501



	Type	Part No.
Hose	-	SH00000034
Straight pipe	Adjustable length	SH00000060
Nozzle assembly	Flooring & carpet	SH00000058
Crevice nozzle	-	SH00000042

Flexible hose set

(Total length: 95cm)



Model No.	Part No.
DUB182, UB1100, UB1101	191750-9

Holder set





Model No.	Part No.
CL001G, DCL280F, DCL281F, DCL282F, DCL180, DCL181F, DCL182, CL114FD, CL107FD	199971-7

VACUUM CLEANER

Automatic Self-cleaning Filtration System achieved by two filter units


Sistem Penapis Penyucian Automatik 自动清洗过滤系统

Constantly high suction power throughout operation because dust is removed from Prefilters every 10 seconds during operation

Kuasa penyedut yang berterusan sepanjang operasi kerana habuk dikeluarkan dari penapis setiap 10 saat semasa operasi
在整个运行过程中吸力保持在较高的水平，因为在运行过程中，每10秒就会从过滤器中除去灰尘



GYUPPA! Twin Filter

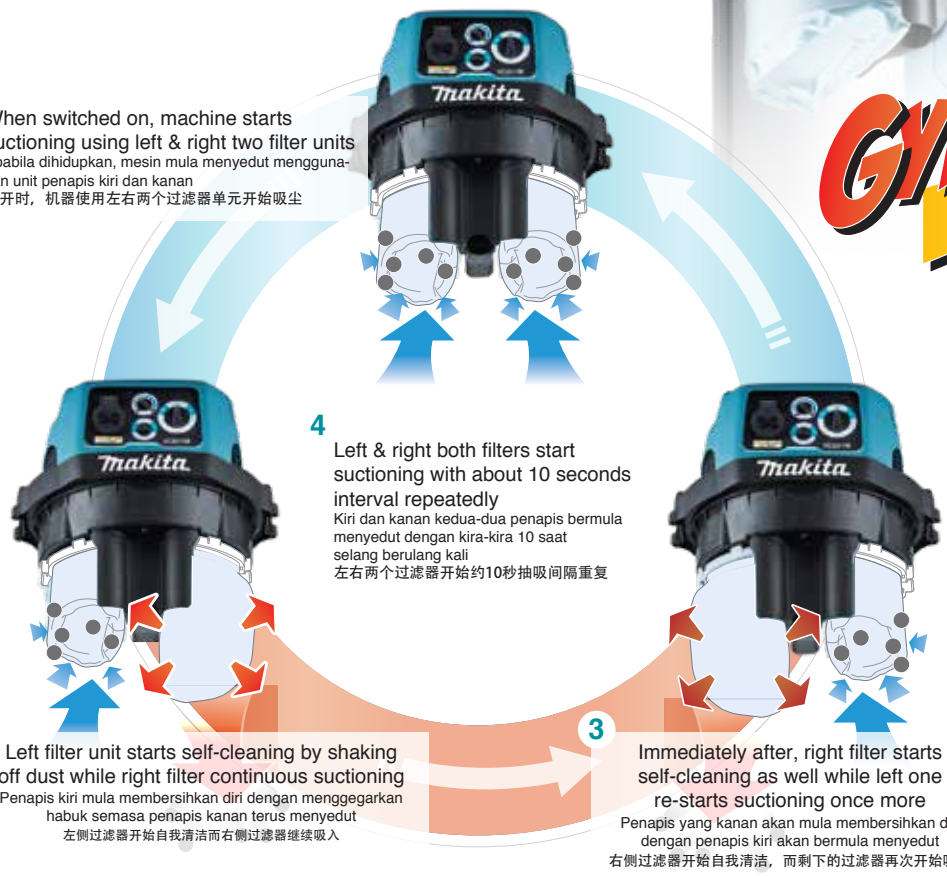

1 When switched on, machine starts suctioning using left & right two filter units
Apabila dihidupkan, mesin mula menyedut menggunakan unit penapis kiri dan kanan
打开时，机器使用左右两个过滤器单元开始吸尘

2 Left filter unit starts self-cleaning by shaking off dust while right filter continuous suctioning
Penapis kiri mula membersihkan diri dengan menggegarkan habuk semasa penapis kanan terus menyedut
左侧过滤器开始自我清洁而右侧过滤器继续吸入

3 Immediately after, right filter starts self-cleaning as well while left one re-starts suctioning once more
Penapis yang kanan akan mula membersihkan diri dengan penapis kiri akan bermula menyedut
右侧过滤器开始自我清洁，而剩下的过滤器再次开始吸入

4 Left & right both filters start suctioning with about 10 seconds interval repeatedly
Kiri dan kanan kedua-dua penapis bermula menyedut dengan kira-kira 10 saat selang berulang kali
左右两个过滤器开始约10秒抽吸间隔重复

VC3211M

173

Vacuum Cleaner (Wet & Dry)
Pembersih Vakum (Basah Dan Kering)
吸尘机(干湿两用)



- **32L Large dust bag capacity enables continuous cleaning work**
  Kapasiti debu 32L besar boleh membersih secara berterusan
  32L大容量尘袋可延续清洁工作

Standard Equipment: Hose, Holder 10-33, Front Cuffs (22, 24, 38), Cloth Filter, Poly Bag Set 10pcs

GYUPPA! Twin Filter

Dust Class M
Debu Kelas M | 集尘等级M

WET Basah 湿 DRY Kering 干



AUTOMATIC Self-cleaning Filtration System
Sistem Penapis Penyucian Automatik
自动清洗过滤系统

Continuous Rating Input Kuasa Sedutan 额定输入功率	**1,050W**
Max Peak Air Flow Aliran Udara 最大空气流量	**2.0m³/ min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**22.0kPa (2,240 mmH_2O)**
Tank Capacity Kapasiti 容量	**Dust: 32L** **Water: 27L**
Dimensions (L x W x H) Dimensi 体积	**552x398x685mm** **(21-3/4"x15-5/8"x27")**
Net Weight Berat Bersih 净重	**16.9kg (37.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

VC2211M

173

Vacuum Cleaner (Wet & Dry)
Pembersih Vakum (Basah Dan Kering)
吸尘机(干湿两用)



- **Approved for Dust Class M in accordance with the EU standard**
  Diluluskan oleh piawaian EU untuk menyedut debu kelas M
  依欧盟标准，集尘等级M

Standard Equipment: Hose, Front Cuffs (22, 24, 38), Belt Hook, Hose Band, Cap, Poly bag 800x650, Poly Bag Set 10 pcs

GYUPPA! Twin Filter

Dust Class M
Debu Kelas M | 集尘等级M

WET Basah 湿 DRY Kering 干



AUTOMATIC Self-cleaning Filtration System
Sistem Penapis Penyucian Automatik
自动清洗过滤系统

Continuous Rating Input Kuasa Sedutan 额定输入功率	**1,050W**
Max Peak Air Flow Aliran Udara 最大空气流量	**2.0m³/ min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**22.0kPa (2,240 mmH_2O)**
Tank Capacity Kapasiti 容量	**Dust: 22L** **Water: 17L**
Dimensions (L x W x H) Dimensi 体积	**552x398x569mm** **(21-3/4"x15-5/8"x22-3/8")**
Net Weight Berat Bersih 净重	**16.3kg (35.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

VACUUM CLEANER

Automatic self-cleaning filter (VC1310L, VC2510L, VC3210L)


Sistem Penapis Penyucian Automatik 自动清洗过滤系统

obtained by Triple filter structure composed of: Powder filter + Damper + Prefilter

Kuasa penyedutan yang berterusan sepanjang operasi kerana habuk dikeluarkan dari Prefilters setiap 10 saat semasa operasi
由三重过滤器结构得到：粉末过滤器+阻尼器+预过滤器



When the power is switched on, Prefilter collapses into itself to compress Damper, and fits closely over Damper and Powder filter.
Apabila kuasa dihidupkan, Prefilter runtuh ke dalamnya untuk memampatkan Damper, dan sesuai dengan penapis Damper dan Serbuk.
当接通电源时，Prefilter会自行折叠以压缩阻尼器，并紧密贴合阻尼器和粉末过滤器。



When the power is switched off, Damper expands back to its original size and shakes off dust from Prefilter automatically with its expanding power.
Apabila kuasa dimatikan, Damper mengembang kembali ke saiz asalnya dan mengelakkan habuk dari Prefilter secara automatik dengan kuasa yang berkembang.
当电源关闭时，阻尼器膨胀回到其原始尺寸，并通过扩展的功率自动将Prefilter的灰尘抖落。



VC3210L

173

Vacuum Cleaner (Wet & Dry)
Pembersih Vakum (Basah Dan Kering)
吸尘机(干湿两用)



Dust Class L
Debu Kelas L | 集尘等级L
WET Basah 湿 DRY Kering 干



- **For both wet and dry vacuum cleaning**
  untuk menyedut kotoran kering atau lembap
  适用于干和湿集尘清洁

Standard Equipment: Hose, Holder 10-33, Front Cuffs (22, 24, 38), Cloth Filter, Damper, Poly Bag Set (10pcs)

Continuous Rating Input Kuasa Sedutan 额定输入功率	**1,050W**
Max Peak Air Flow Aliran Udara 最大空气流量	**2.0m³/ min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**22.0kPa (2,240 mmH$_2$O)**
Tank Capacity Kapasiti 容量	**Dust: 32L** **Water: 27L**
Dimensions (L x W x H) Dimensi 体积	**552x398x685mm** **(21-3/4"x15-5/8"x27")**
Net Weight Berat Bersih 净重	**14.5kg (32.0lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

VC2510L

173

Vacuum Cleaner (Wet & Dry)
Pembersih Vakum (Basah Dan Kering)
吸尘机(干湿两用)



Dust Class L
Debu Kelas L | 集尘等级L
WET Basah 湿 DRY Kering 干



- **For both wet and dry vacuum cleaning**
  untuk menyedut samaada kotoran kering atau lembap
  适用于干和湿集尘清洁

Standard Equipment: Hose, Holder 10-33, Front Cuffs (22, 24, 38), Poly Bag, Poly Bag Set (10pcs)

Continuous Rating Input Kuasa Sedutan 额定输入功率	**1,050W**
Max Peak Air Flow Aliran Udara 最大空气流量	**2.0m³/ min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**22.0kPa (2,240 mmH$_2$O)**
Tank Capacity Kapasiti 容量	**Dust: 25L** **Water: 14L**
Dimensions (L x W x H) Dimensi 体积	**432x416x451mm** **(17"x16-3/8"x17-3/4")**
Net Weight Berat Bersih 净重	**10.5kg (23.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

VC1310LX1

173

Vacuum Cleaner (Wet & Dry)
Pembersih Vakum (Basah Dan Kering)
吸尘机(干湿两用)



Dust Class L
Debu Kelas L | 集尘等级L
WET Basah 湿 DRY Kering 干



- **For both wet and dry vacuum cleaning**
  untuk menyedut samaada kotoran kering atau lembap
  适用于干和湿集尘清洁



Standard Equipment: Hose, Holder 10-33, Front Cuffs (22, 24, 38), Poly Bag Set, Cleaning Set



Continuous Rating Input Kuasa Sedutan 额定输入功率	**1,050W**
Max Peak Air Flow Aliran Udara 最大空气流量	**2.0m³/ min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**22.0kPa (2,240 mmH$_2$O)**
Tank Capacity Kapasiti 容量	**Dust: 13L** **Water: 7L**
Dimensions (L x W x H) Dimensi 体积	**366x334x420mm** **(14-3/8"x13-1/8"x16-1/2")**
Net Weight Berat Bersih 净重	**9.6kg (21.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

VC2000L

Vacuum Cleaner (Wet & Dry)
Pembersih Vakum (Basah Dan Kering)
吸尘机(干湿两用)

Dust Class L
Debu Kelas L | 集尘等级L
WET Basah 湿 DRY Kering 干



- **For both wet and dry vacuum cleaning**
  untuk menyedut kotoran kering atau lembap
  适用于干和湿集尘清洁

Standard Equipment: 3.5m x 32mm Hose, Heavy Duty PET Filter, Cloth Bag, Poly Bag Set, Hose Band, Floor Nozzle, Universal Nozzle, Crevice Nozzle, Straight Pipe x2

Continuous Rating Input Kuasa Sedutan 额定输入功率	**1,000W**
Capacity Kapasiti 尘袋容量	**Dust: 20L | Water: 13L**
Max Air Flow Aliran Udara 最大空气流量	**3.6m³/min**
Max Sealed Suction Sedutan Terkedap 最大密封吸力	**21kPa**
Net Weight Berat Bersih 净重	**7.5kg**

Vacuum Cleaner System charts

Hose connection 28mm | Hose connection 38mm | Hose connection 32mm

For Cleaning

Model
DVC860L
DVC862L
DVC863L
DVC864L



Model
DVC350



Model
DVC261
DVC265



Model
VC3211M
VC2211M
VC3210L
VC2510L
VC1310L



Model
CL121D



Model
DVC750L



38-A Hose 38mm
with front sleeve



32-A Hose 32mm
with front sleeve



28-A Hose 28mm



28-B
Bending pipe assembly




28-B
Bending pipe assembly



28-H
Flexible rubber nozzle



28-I
Tapered nozzle set



28-H is additionally required

Front cuffs 22



28-I
Tapered nozzle set



Joint 38



28-C
Aluminum Telescopic pipe assembly



28-C
Plastic Telescopic pipe assembly



28-C
Plastic Telescopic pipe assembly

28-D
Nozzle assembly



28-E
Round brush



28-F
Corner nozzle



28-G
Shelf brush



For Dust Collecting

Model
DVC860L
DVC862L
DVC863L
DVC864L



Model
DVC350



Model
DVC261
DVC265



Model
VC3211M
VC2211M
VC3210L
VC2510L
VC1310L



Model
DVC750L



28-A
Hose 28mm



38-A
Hose 38mm



Front cuffs 38, 22



Joint 22-38




Joint 22-38



Attachments



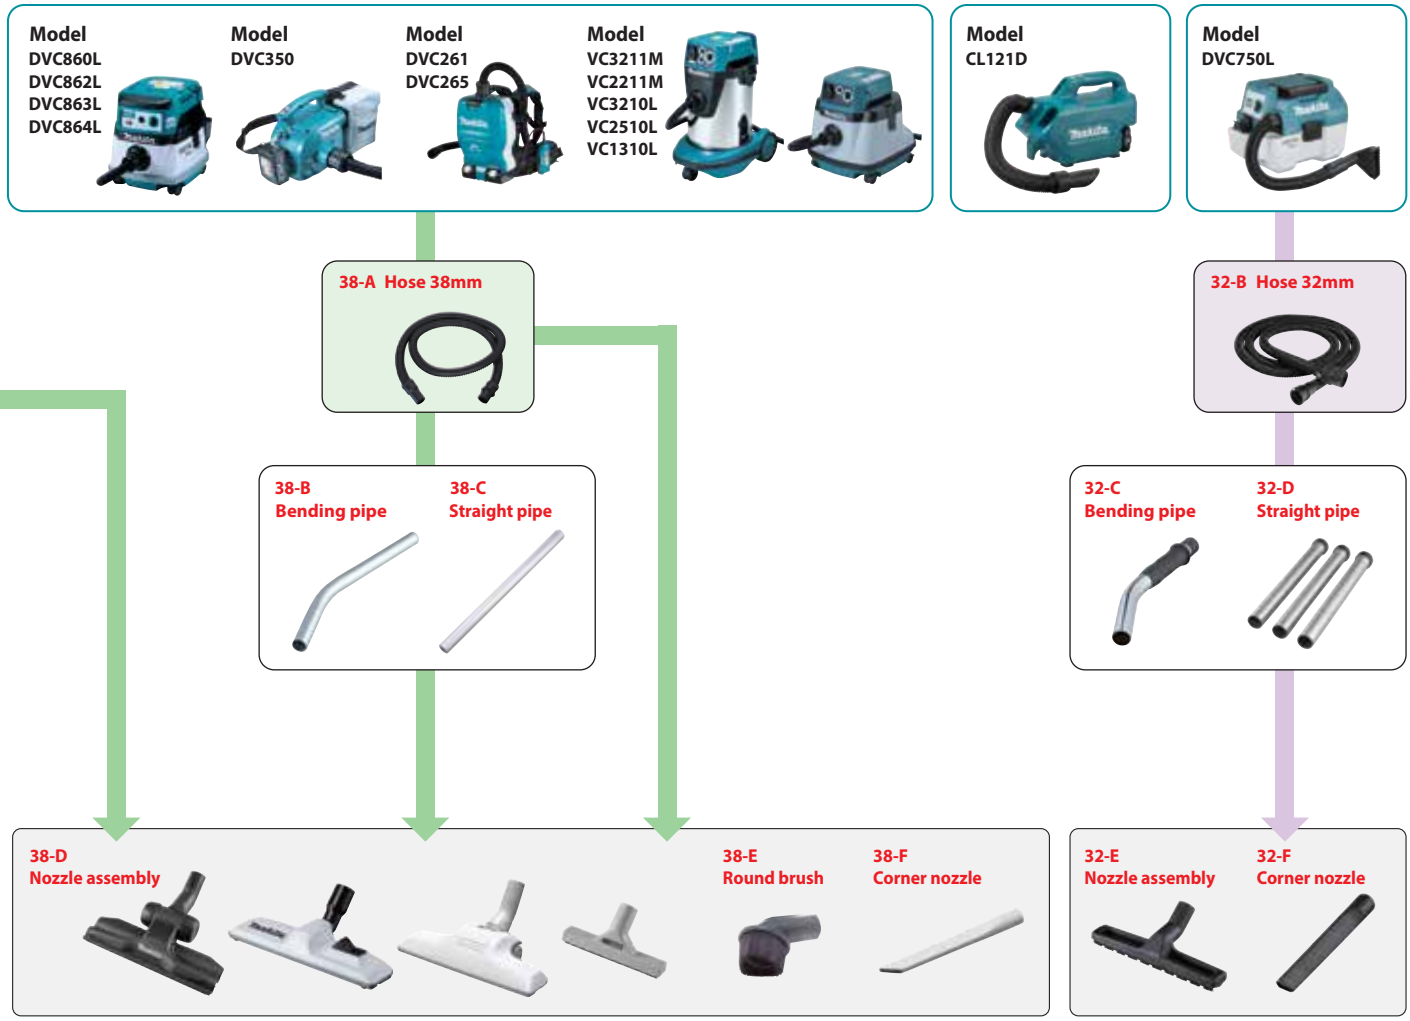


Front cuffs, Joint & Hose Connection

28-A Hose 28mm


Supplied with both
Front cuffs 22 and 38






38-A Hose 38mm






Front cuffs 38, Front cuffs 22 and Front cuffs 24 connection

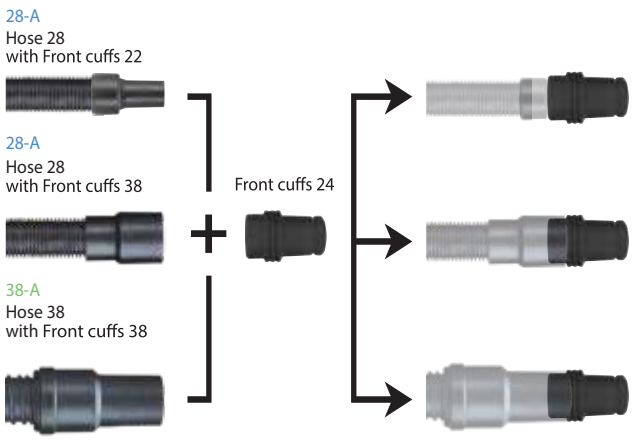

Hose to hose connection

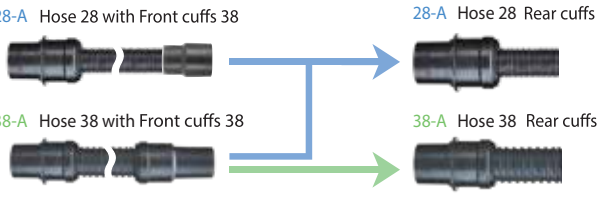

Joint 22-38 connection & size




Filter & Dust bag



for Dust
(Powder)

Compatible with usual Poly bags or Paper filters, allowing for:




- Quick and easy dust disposal
- Lower-running cost compared with paper dust bag



	DVC862L DVC860L (Wet & Dry)	DVC864L DVC863L (Dry)	VC3211H (Wet & Dry)	VC3211M VC2211M VC2201M (Wet & Dry)	VC3210L (Wet & Dry)	VC2510L (Wet & Dry)	VC1310L (Wet & Dry)
Powder Filter Set Dry only *HEPA filter	*197166-6	*197166-6			195441-4	195441-4	195438-3
Pre-filter set	195553-3	195553-3	196253-8	196253-8			195553-3
Cloth filter	140248-3						
Damper set	195552-5	195552-5			195552-5	195552-5	195552-5
Filter for water set Water only	195555-9						195555-9
Filter bag set 15L (5pcs) for dry dust	195557-5	195557-5				195557-5	195557-5
Poly bag set (10pcs)	195432-5	195432-5	195440-6	195440-6	195440-6	195440-6	195432-5

System charts

A



W/ Ø28mm Hose


Model
VC3211M
VC2211M
VC3210L

W/ Front cuffs



38 24 22

B



W/ Ø28mm Hose

Model
VC2510L
VC1310L
DVC863L
DVC864L

W/ Front cuffs



38 24 22

C



W/ Ø28mm Hose

Model
DVC350

W/ Front cuffs



38 24 22

D



W/ Ø38mm Hose

Model
DVC860L
DVC862L
DVC863L
DVC750L

W/ Joint 22-38



E



W/ Ø28mm Hose

Model
DVC261
DVC265

W/ Front cuffs



38 24 22

For Model	Suction Systems and Part No.

Rotary Hammer, Demolition Hammer

SDS-MAX, 17mm (11/16") Hex:
Bull points with over 280mm length
Cold chisels with over 280mm length

SDS-MAX only:
Scaling chisel (for tile), Bushing tool
Scaling chisels length

19mm (3/4") Hex only
Scaling chisels

17mm(11/16")Hex:
HM0830,HR3530, HR4030C



SDS-MAX:
HR4001C/02/10C/11C,
HR4501C/10C/11C,
HR3540C/41FC
HM0870C/71C,
HM1101C/11C,
HM1203C/13C, HM1214C
HR4501C/10C/11C, HR4013C
HR4003C, HR3540C/41FC




DHR400, HR5202C,
HR5212C, HM1205



19mm(3/4")Hex:
HR4041C

Dust extractor attachment set
(Hammering mode only)
199144-2 (w/hose for)
199143-4 (w/o hose for)



ø28mm hose can be directly connected.

Electric Breaker

HM1304/B, HM1306,
HM1317C/CB, HM1307C/CB,
HM1400, HM1500/B, HM1810,
HM1801, HM1812, HM1802





Vacuum attachment set



197168-2 (w/o hose for)
197148-8 (w/ hose for)

ø28mm hose can be directly connected.

A Directly

B Directly

C Directly

D ø28mm hose

E Directly

For Model	Suction Systems and Part No.

Rotary Hammer, Combination Hammer
see page 150



Dust cup set

DHR242, HR2650, HR2651, HR2652, HR2653, HR2661, HR2663, DHR280, DHR282, HR2300, HR2600, HR2601, HR2601F, HR2630, HR2631F, HR2641 — 195173-3



DHR243, HR2651T, HR2653T, HR2300T, HR2320T, HR2630T, HR2631FT, — 195179-1



DHR164, DHR165, DHR171, DHR182, HR140D, HR166D, HR1840, HR1841F, HR2800, HR2810, HR2811F, DHR202, DHR241, DHR263, HR2230, HR2460, HR2460F, HR2470, HR2475 — 198362-9



Rotary Hammer, Combination Hammer

DHR164, DHR165
DHR202, BHR262/T
DHR263, DHR264

Dust extractor attachment

193472-7



HR2470 series
HR2800 series

Rotary Hammer

HR4002, HR4011C,
HR4010C, HR4001C,
HR4511C, HR4510C, HR4501C

Vacuum attachment

195866-2



(Max. Bit Diameter 40mm)



DHR400, HR4013C, HR4003C — 199142-6
HR5212C, HR5202C — 196858-4

A Front cuffs 22

B Front cuffs 22

C Front cuffs 22

D Joint 22-38
195548-6

E Front cuffs 22

System charts

For Model	Suction Systems and Part No.
Angle Cutter 4112H 4112HS 4114 4114S	**Elbow joint 32** 192613-2
Dustless Cutter 4105KB	**Elbow joint 32** 192613-2
Dustless Cutter 4100KB	
Cutter With Dust Collection 4157KB	
Wall Chaser SG1251, SG1250	
Concrete Planer PC5000C, PC5001C PC5010C	
Angle Grinder	**Dust collecting wheel guard** For cup type diamond wheel

For 115, 125mm Model
Single notch ——— w/o mark of origin 195237-3
Triple notches ———
w/o mark of origin for IEC 195239-9
w/ mark of origin for IEC 195238-1
North America package 195236-5
North America package for UL 196575-6

For 180,230㎜ Model
w/ mark of origin for IEC 195384-0
w/o mark of origin for IEC 195385-8
North America package for UL 197584-8

Towin notches ———
w/ mark of origin 195387-4
w/o mark of origin 195388-2
North America package 195386-6

A Front cuffs 38
B Front cuffs 38
C Front cuffs 38
D
E Front cuffs 38

For Model	Suction Systems and Part No.
Angle Grinder	**Dust collecting wheel guard**
For 125mm Model ———	196845-3 196846-1
For 230mm Model ———	198379-2 198380-7
Angle Grinder	**Dust collecting wheel guard**
For 115, 125mm Model ———	192968-5 193794-5 (Economy type)
For 180mm Model ———	194303-3
For 230mm Model ———	194044-1
Belt Sander 9924DB	**Joint 32** 192518-6
Belt Sander 9404, 9902, 9903, 9910, 9911, 9920,	
Belt Sander 9403, 9921	**Joint 32** 192349-3
Wheel Sander 9741	**Joint** 410899-9

A Front cuffs 38
B Front cuffs 38
C Front cuffs 38
D
E Front cuffs 38






System charts

For Model	Suction Systems and Part No.

Disc Grinder
N9500N, 9500NB



Dust collecting wheel guard
192212-0




Rubber sleeve
192202-3

Angle Grinder

Dust collecting wheel guard

For 100mm Model — Dust collecting 100C set — 198413-8
Dust collecting 100CD set — 198414-6

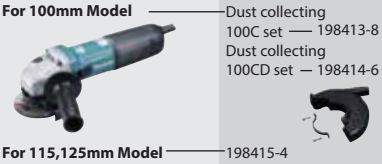

For 115,125mm Model — 198415-4

Belt Sander
9032



Dust nozzle assembly
122652-8



Belt Sander
9031

Finishing Sander
9046, BO3700, BO3710, BO3711, BO4900/V, BO4901 BO4555, BO4556, BO4565, BO4566, BO4557, BO4558

Random Orbit Sander
BO5012, BO5030, BO5031, BO5040, BO5041, BO6030, BO6040, DBO140, DBO180



Multi Tool

Dust attachment set

DTM50, DTM40 — 195965-0
TM3000C — 196022-7
TM3010C — 196550-2



DTM51, DTM41 — 196765-1

Circular Saw

Joint (Dust nozzle)

DHS630 — 194314-8
DSS611, DSS610 — 419283-5
DSS501, DSS500 — 194415-2
HS300D, HS301D — 195334-5



Jig Saw
JV100D
JV143D
JV183D
4326, 4327, 4328, 4329
JV0600




Jig Saw
DJV140, DJV180
4350T/CT/FCT, 4351T/CT/FCT



Dust Nozzle
417853-4



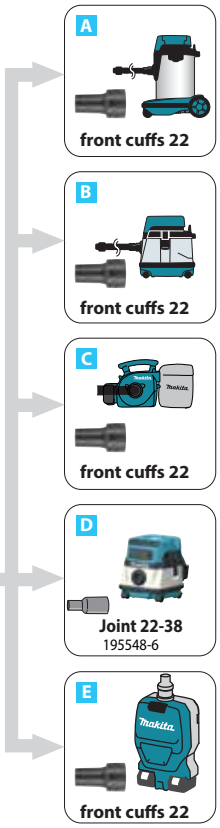

For Model	Suction Systems and Part No.



front cuffs24
195546-0



Circular Saw

Joint (Dust nozzle)

HS6100, HS6101, HS7100, HS7101 — 453289-3
DHS710, HS6600, HS6601, HS7010, HS7600, HS7601, HS7610, HS7611 — 196520-1
HS6600, HS7000, HS7600, DHS711 — 196843-7 (with short lever)
5007N, 5007NF — 199712-1 (with short lever)
HS0600 — 198263-1, 198265-7 (with short lever)
DHS680 — 196961-1, 196952-2 (with short lever)
HS7000, HS7600 — 196520-1, 197221-4 (with short lever)



Front cuffs 24
195546-0



Plunge Cut Circular Saw
SP6000

Front cuffs 24
195546-0





Cordless Plunge Cut Circular Saw
DSP600, DSP601



Aluminum Groove Cutter
CA5000



Cordless Jig Saw

Dust nozzle assembly

DJV141, DJV142, DJV181, DJV182 — 126331-0
DJV102D, JV103D — 457801-1





Front cuffs 24
195546-0

Slide Compound Saw
LS1019/L, LS1219/L

Front cuffs 24
195546-0





Cordless Slide Compound Miter Saw
DLS110, DLS111, DLS112
DLS211, DLS212



System charts

For Model	Suction Systems and Part No.

Cordless Slide Compound Miter Saw
DLS713
DLS714



Slide Compound Saw
LS0714/F/FL/L
LS0815F/FL
LS1016L
LS1017L
LS1018/L
LS1216/L



Miter Saw
LS1030N, LS1440



Compound Miter Saw
LS1040/F,
LS1045,
LS1221

Cordless Compound Miter Saw
DLS600





Flip Over Saw
LF1000



Table Top Miter Saw
LH1040/F
LH1201FL



A

Front cuffs 38

B

Front cuffs 38

C

Front cuffs 38

D


E


For Model	Suction Systems and Part No.

Table Saw
2704N, 2705



Joint
419093-0



Table Saw
2703

Joint 55
192799-2



Table Saw
MLT100N



Dust point
JM27000090



Table Saw
2712



Band Saw
LB1200F




Joint
419093-0



A

Front cuffs 38

B

Front cuffs 38

C


D



E




System charts

For Model	Suction Systems and Part No.
Circular Saw	**Joint** (Dust nozzle)
5603R, 5704R, 5705R	192420-3
5143R	192490-2
5008MG	450079-5
	194489-3 (with short lever)
5103R, 5903R	192419-8
5104S, 5104	450316-7
N5900B, 5902B	193823-9
	193068-4 (with short lever)







Circular Saw
5604R, 5037NB



Dustless Circular Saw
5017RKB
5057KB




A —  Front cuffs 38

B —  Front cuffs 38

C* —  Front cuffs 38

D — 

E —  Front cuffs 38

***C: DVC350 Cannot be used with Planer models**

For Model	Suction Systems and Part No.
Power Planer	
1050D, 1051D	
KP0810/C	
Power Planer	**Nozzle**
DKP180, DKP140	451329-1
KP0800	
1805N	JPA122277
Power Planer	**Nozzle for vacuum cleaner**
1911B	192082-7
Power Planer	
N1900B, N1923B, KP0800, 1804N	
1805N, 1806B, KP312/S	











A —  Front cuffs 38

B —  Front cuffs 38

C* —  Front cuffs 38

D — 

E —  Front cuffs 38

***C: DVC350 Cannot be used with Planer models**



Nozzle assembly



Joint

*Elbow



Model No.	Part No.
N1900B, N1923B	181572-5
KP0800, DKP180, DKP140	451329-1
1804N	JPA122278 (122278-6)
1805N	JPA122277 (122277-6)
1806B	122397-8
KP312/S	193733-5

Model No.	Part No.
N1900B, N1923B	JPA122275 (122275-2)
DKP180, DKP140, KP0810/ C, KP0800	*416368-8
1804N, 1805N, 1806B, KP312/S	181575-9

System charts

For Model	Suction Systems and Part No.

Plate Joiner
PJ7000, 3901,
DPJ180, DPJ140



Cut-out Tool
3706



Dust collection cover
193449-2



Cordless Cut-out Tool
DCO180





Cordless Drywall saw
DSD180,
SD100D




Router
RP0910,
RP1110C













*C: DVC350 Cannot be used with Router models

For Model	Suction Systems and Part No.

Router
RP1801/ F
RP1800/ F
RP2301FC
RP2300FC



Dust nozzle
194934-8



Router
RD1100,
RD1101,
RF1100,
RF1101,
RP1100,
RP1101



Dust nozzle
193379-7



Router
RP0900,
***RT0700C, DRT50

Cordless Router
DRT50



Dust nozzle
194733-8




*** Use with Plunge base assembly


Trimmer
RT0700C





Dust nozzle
195559-1





Cordless Trimmer
DRT50











Makita recommend to use 38mm hose when you use Router





Front cuffs & Joint

Front cuffs 22



Front cuffs 24



Front cuffs 38



Joint 22-38



Joint 38



Joint H



Rubber sleeve 18-21



Type	Part No.
Front cuffs 22	195547-8
Front cuffs 24	195546-0
Front cuffs 38	195545-2
Joint 22-38	195548-6

Hose connection 28mm
28-A
Hose



Note:
Can be connected with power tools, Front cuffs and Joint are required for some power tools.
*DVC260, DVC261, DVC265 only
* for cleaning (Use with Bending pipe assembly)

Size	Length (m)	with Front cuffs	Part No.
28mm	1.0	-	*143787-2
28mm	1.5	38	*152992-0
28mm	1.5	22, 38	A-34235
28mm	2.5	22, 24, 38	195437-5
28mm	3.5	22, 24, 38	195433-3
28mm	5	22, 24, 38	195436-7
28mm	5	22, 38	A-34229

28-B
Bending pipe
*with Hose 28 sleeve





Description	Part No.
For Aluminum (Part No. 140G19-0) Telescopic pipe assembly with lock	*127093-3
For plastic straight pipe 28 and Telescopic pipe assembly 28	*126756-8

28-C
Straight pipe





Description	Part No.
Aluminum Telescopic pipe assembly Pipe length is variably adjustable from 590 to 942mm.	140G19-0
Telescopic pipe assembly 28 Pipe length is variably adjustable from 500 to 850mm.	198560-5

28-D
Nozzle assembly

Flat type







F/C switching t-nozzle 28
Flooring & carpet





Floor/carpet t-nozzle
For rug / carpet cleaning





For rug / carpet cleaning





Floor t-nozzle 28






Seat nozzle 28
For car seat









Description	Color	Part No.	EU Part No.
F/C switching t-nozzle 28 Flooring & carpet	White	198183-9	198532-0
Floor/carpet t-nozzle For rug / carpet cleaning	White	198525-7	-
	Black	198526-5	-
Floor t-nozzle 28	White	123486-2	-
Seat nozzle 28 For car seat	White	-	199038-1
	Black	-	199039-9

28-E
Round brush



Color	Part No.
White	198878-4
Black	198551-6

28-F
Corner nozzle

Type	Color	Part No.
300-28mm 	White	198919-6
	Black	198992-6
Crevice nozzle 415 set 	White	199439-3

28-G
Shelf brush
(For gentle cleaning by soft-tipped brush)




Color	Part No.	EU Part No.
White	198872-6	198873-4
Black	198536-2	-

28-H
Flexible rubber nozzle



Color	Part No.	EU Part No.
grey	197900-4	197901-2

28-I
Tapered nozzle set
Use with Front cutts 22 or Flexible rubber nozzle



Color	Part No.
grey	192236-6

Hose stand
For model
VC1310L, VC2211M, VC2510L,
VC3210L, VC3211M





Part No.
197323-6

Holder set 10-33




Part No.
195544-4



Hose connection 38mm

38-A
Hose 38mm

for cleaning
*Use with 28-B Bending pipe assembly



Size	Length (m)	with Front cuffs	Part No.
38mm	2.5	38	195434-1
38mm	5	38	195435-9

Cleaning set

Includes one each of:
-Hose complete 38-2.5
-Straight pipe
-Bending pipe
-Nozzle assembly
-Corner nozzle



Part No.
195439-1

38-B
Bending pipe



Description	Part No.
Aluminum	192562-3

38-C
Straight pipe



Description	Part No.
Aluminum	192563-1

38-D
Nozzle assembly

Flooring & carpet



Universal Type



Compact Type A



Compact Type B
(wet model only)



Wide Type
(wet model only)



Description	Dry/ Wet	Part No.	EU Part No.
Flooring & carpet	Dry	198184-7	-
Universal Type	Dry/ Wet	195551-7	-
Compact Type A	Dry	195549-4	122334-2
Compact Type B	Wet	195550-9	-
Wide Type	Wet	A-47846	-

38-E
Round brush



Type	Color	Part No.
38mm	Black	191657-9

38-F
Corner nozzle



Type	Color	Part No.
38mm	Yellow grey	410306-2

DRILLING | FASTENING

DP2010 6.5mm (1/4")

419

High Speed Drill
Gerudi Kelajuan Tinggi
高速钻



- **Compact and high power**
  Kuasa tinggi dan padat
  紧凑和高功率



Standard Equipment: Chuck Key

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**370W**
Capacity Kapasiti 能力	**Steel: 6.5mm (1/4")** **Wood: 15mm (9/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0-4,200**
Dimensions (L x W x H) Dimensi 体积	**209x64x175mm** **(8-1/4"x2-1/2"x6-7/8")**
Net Weight Berat Bersih 淨重	**1.0kg (2.2lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

DF0300 10mm (3/8")

411

Driver Drill
Gerudi Pemutar Skru
螺丝起子电钻



- **Compact Design with a Short Overall Length**
  Reka bentuk padat dan pendek
  紧凑小巧的设计



Standard Equipment: (+)(-) Bit

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**320W**
Capacity Kapasiti 能力	**Steel: 10mm (3/8") | Wood: 28mm (1-1/8")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.0 - 10mm (1/32 - 3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,500 | Low: 0 - 450**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最快扭转	**Hard 56.0N·m (500in.lbs.)** **Soft: 21.0N·m (190in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁定扭力	**42.0N·m (370in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**220x67x206mm (8-5/8"x2-5/8"x8-1/8")**
Net Weight Berat Bersih 淨重	**1.2kg (2.7lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

6412 10mm (3/8")

64

Drill
Gerudi
电钻



- **Compact and lightweight, yet with enough power**
  Padat dan ringan, namun dengan kuasa yang mencukupi
  小巧轻便，但功率充足



Standard Equipment: Chuck Key

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**450W**
Capacity Kapasiti 能力	**Steel: 10mm (3/8")** **Wood: 25mm (1")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0-3,400**
Dimensions (L x W x H) Dimensi 体积	**228x64x183mm** **(9x2-1/2x7-1/4")**
Net Weight Berat Bersih 淨重	**1.3kg (2.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

6413 10mm (3/8")

64

Drill
Gerudi
电钻



- **General Purpose Drill Featuring Compact And Lightweight Design**
  Reka Bentuk Kompak Dan Ringan untuk penggerudian tujuan umum
  紧凑轻巧机身适合一般用途



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**450W**
Capacity Kapasiti 能力	**Steel: 10mm (3/8")** **Wood: 25mm (1")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0-3,400**
Dimensions (L x W x H) Dimensi 体积	**234x64x183mm** **(9-1/4"x2-1/2"x7-1/4")**
Net Weight Berat Bersih 淨重	**1.3kg (2.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

6305 13mm (1/2")

303

Drill
Gerudi
电钻



- **Heavy duty motor**
  Motor tugas berat unggul
  卓越马达



Standard Equipment: Chuck Key, Depth Gauge, Side Grip

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**850W**
Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 30mm (1-3/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**1,450**
Dimensions (L x W x H) Dimensi 体积	**346x84x152mm** **(13-5/8"x3-5/16"x6")**
Net Weight Berat Bersih 淨重	**2.8kg (6.2lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

DRILLING | FASTENING

DS5000 16mm (5/8")

411

Drill
Gerudi
电钻



- **Powerful 750W motor for improved mixing and drilling performance**
  Motor berkuasa 750W untuk prestasi pencampuran dan penggerudian yang lebih baik
  强劲的750W马达提高混合和钻孔性能



Standard Equipment: Chuck Key, Top Grip

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**750W**
Capacity Kapasiti 能力	**Steel: 16mm (5/8")** **Wood: 36mm (1-7/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**600**
Dimensions (L x W x H) Dimensi 体积	**348x83x401mm** **(13-3/4"x3-1/4"x15-3/4")**
Net Weight Berat Bersih 淨重	**3.0kg (6.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

DS4012 13mm (1/2")

411

Drill
Gerudi
电钻



- **All-ball bearing construction for durability and longer tool life**
  Struktur galas bola untuk memanjangkan hayat alat
  滚珠轴承结构延长工具寿命




Standard Equipment: Chuck Key, Top Grip

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**750W**
Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 36mm (1-7/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0-600**
Dimensions (L x W x H) Dimensi 体积	**340x83x390mm** **(13-3/8"x3-1/4"x15-3/8")**
Net Weight Berat Bersih 淨重	**2.8kg (6.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

6016 16mm (5/8")

51

Drill
Gerudi
电钻



- **D-handle rotates 360 degrees for multi-position operation**
  Pemegang-D berputar 360˚ memudahkan operasi
  360˚ 旋转D型手柄方便操作



Standard Equipment: Chuck Key, Depth Gauge, Top Grip

Continuous rating input Input Kuasa Berterusan 额定输入功率	**480W**
Capacity Kapasiti 能力	**Steel: 16mm (5/8")** **Wood: 36mm (1-3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**700**
Overall Length Panjang Keseluruhan 总长度	**365mm (14-3/8")**
Net weight Berat Bersih 淨重	**4.4kg (9.7lbs)**
Power supply cord Kabel Wayar 电源线	**2.5m (8.2ft)**

DA3010F 10mm (3/8")

419

Angle Drill
Gerudi Sudut
角向电钻



- **Powerful 450W motor with less weight**
  Motor berkuasa 450W dan ringan
  轻量且强劲的450W马达



Standard Equipment: Chuck Key, Side grip 36 complete

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**450W**
Capacity Kapasiti 能力	**Steel: 10mm (3/8")** **Wood: 25mm (1")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0-2,400**
Overall Length Panjang Keseluruhan 总长度	**270mm (10-5/8")**
Net Weight Berat Bersih 淨重	**1.6kg (3.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**





DRILLING | FASTENING





TD0100

419

Impact Driver
Pemutar Skru Impak
冲击螺丝起子机



- **Impacting mechanism for secure fastening**
  Mekanisme impak untuk pengetatan yang kukuh
  冲击机构确保紧固



Standard Equipment: Phillips Bit

Continuous rating input Input Kuasa Berterusan 额定输入功率	**230W**
Capacity Kapasiti 能力	**Machine Screw: M4 - M8 (5/32" - 5/16")** **Standard Bolt: M5 - M14 (3/16" - 9/16")** **High Tensile Bolt: M5 - M10 (3/16" - 3/8")** **Coarse thread (in length): 22 - 90mm (7/8" - 3-1/2")**
Driving Shank (Hex) Hex Memandu Aci 六角驱动轴	**6.35mm (1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,200**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 3,600**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**100N·m (74ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**218x60x180mm** **(8-5/8"x2-3/8"x7-1/8")**
Net weight Berat Bersih 淨重	**0.96kg (2.1lbs)**
Power supply cord Kabel Wayar 电源线	**2.5m (8.2ft)**

TD0101F

411

Impact Driver
Pemutar Skru Impak
冲击螺丝起子机



- **Enables to drive screws even without pre-drilling pilot holes**
  Skru boleh digerudi walaupun tanpa lubang pra-penggerudian
  即使没有预钻导孔也可以驱动螺钉



Standard Equipment: Phillips Bit

Continuous rating input Input Kuasa Berterusan 额定输入功率	**230W**
Capacity Kapasiti 能力	**Machine Screw: M4 - M8 (5/32" - 5/16")** **Standard Bolt: M5 - M14 (3/16" - 9/16")** **High Tensile Bolt: M5 - M10 (3/16" - 3/8")** **Coarse thread (in length): 22 - 90mm (7/8" - 3-1/2")**
Driving Shank (Hex) Hex Memandu Aci 六角驱动轴	**6.35mm (1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,200**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 3,600**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**100N·m (74ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**184x67x192mm (7-1/4"x2-5/8"x7-9/16")**
Net weight Berat Bersih 淨重	**0.99kg (2.2lbs)**
Power supply cord Kabel Wayar 电源线	**2.5m (8.2ft)**

FS2300

419

Drywall Screwdriver
Pemutar Skru Drywall
石膏板螺丝起子机



- **Large trigger with lock-on button for operator convenience**
  Butang pencetus dengan fungsi mengunci untuk memudahkan pengguna
  备有锁定功能的触发按钮方便操作



Standard Equipment: Phillips Insert Bit x2, Magnetic Bit Holder

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**570W**
Capacity Kapasiti 能力	**Drywall Screw: 5mm (3/16")** **Self-Drilling Screw: 6mm (1/4")**
Driving Shank (Hex) Hex Memandu Aci 六角驱动轴	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,500**
Dimensions (L x W x H) Dimensi 体积	**290x70x207mm** **(11-3/8"x2-3/4"x8-1/8")**
Net Weight Berat Bersih 淨重	**1.6kg (3.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

DRILLING | FASTENING

FS2500

419

Screwdriver
Pemutar Skru
螺丝起子机





- **Aluminum gear housing for less weight and increased durability**
  Lebih tahan lama dan ringan dengan gear aluminium
  铝合金齿轮更轻更耐用

Standard Equipment: Magnetic Socket Bit

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**570W**
Capacity Kapasiti 能力	**Drywall Screw: 5mm (3/16")** **Self-Drilling Screw: 6mm (1/4")**
Driving Shank (Hex) Hex Memandu Aci 六角驱动轴	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,500**
Dimensions (L x W x H) Dimensi 体积	**280x70x207mm** **(11"x2-3/4"x8-1/8")**
Net Weight Berat Bersih 淨重	**1.5kg (3.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

FS2700

419

Screwdriver
Pemutar Skru
螺丝起子机





- **6 stage adjustable torque adjustment for a wide range of applications**
  6 tahap pelarasan tork untuk pelbagai aplikasi
  6级扭力调节适合各种应用

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**570W**
Capacity Kapasiti 能力	**Self-Drilling Screw: 6mm (1/4")** **Machine Screw: 8mm (5/16")** **Wood Screw: 6.2mm (1/4")**
Driving Shank (Hex) Hex Memandu Aci 六角驱动轴	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,500**
Dimensions (L x W x H) Dimensi 体积	**301x70x207mm** **(11-7/8"x2-3/4"x8-1/8")**
Net Weight Berat Bersih 淨重	**1.8kg (4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

FS4200

419

Drywall Screwdriver
Pemutar Skru Papan Gipsum
石膏板螺丝起子机





- **Powerful 570W motor**
  Motor berkuasa 570W
  570W强力马达

Standard Equipment: Phillips Insert Bit x2, Magnetic Bit Holder

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**570W**
Capacity Kapasiti 能力	**Drywall Screw: 5mm (3/16")** **Self-Drilling Screw: 6mm (1/4")**
Driving Shank (Hex) Hex Memandu Aci 六角驱动轴	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 4,000**
Dimensions (L x W x H) Dimensi 体积	**269x65x207mm** **(10-5/8"x2-9/16"x8-1/8")**
Net Weight Berat Bersih 淨重	**1.4kg (3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

FS6300

419

Drywall Screwdriver
Pemutar Skru Papan Gipsum
石膏板螺丝起子机





- **Silent clutch for improved performance and durability**
  Klac senyap untuk prestasi dan ketahanan yang lebih baik
  静音离合器提高性能和耐用性

Standard Equipment: Phillips Insert Bit x2, Magnetic Bit Holder

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**570W**
Capacity Kapasiti 能力	**Drywall Screw: 4mm (5/32")**
Driving Shank (Hex) Hex Memandu Aci 六角驱动轴	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 6,000**
Dimensions (L x W x H) Dimensi 体积	**279x65x207mm** **(11"x2-9/16"x8-1/8")**
Net Weight Berat Bersih 淨重	**1.4kg (3.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

UT1305

303

Mixer
Pengadun
搅拌机





- **Heavy duty and high speed mixer**
  Tahan lasak dan kelajuan tinggi
  耐用和高速

Standard Equipment: Wrenches, Side Grip, Blade

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**850W**
Blade Diameter Diameter Bilah 锯片直径	**165mm (6-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**1,300**
Shank Size of Tool Holder Portion Batang Saiz 柄部尺寸	**M12**
Dimensions (L x W x H) Dimensi 体积	**942x87x152mm** **(37"x3-7/16"x6")**
Net Weight Berat Bersih 淨重	**2.6kg (5.7lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

DRILLING | FASTENING

UT2204 — 303

Mixer
Pengadun
搅拌机



- **Heavy duty and high speed mixer**
  Tahan lasak dan kelajuan tinggi
  耐用和高速



Standard Equipment: Wrenches, Side Grip

Continuous rating input Input Kuasa Berterusan 额定输入功率	**850W**
Blade Diameter Diameter Bilah 锯片直径	**220mm (8-5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**550**
Shank Size of Tool Holder Portion Batang Saiz 柄部尺寸	**M12 or M14**
Dimensions (L x W x H) Dimensi 体积	**929x89x152mm (36-1/2"x3-1/2"x6")**
Net weight Berat Bersih 淨重	**2.7kg (5.9lbs)**
Power supply cord Kabel Wayar 电源线	**2.5m (8.2ft)**

TW1000 25.4mm (1") — 153

Impact Wrench
Perengkuh Impak
套筒扳手



- **Huge 1,000N·m (738 ft.lbs.) of Power for Industrial Applications**
  Kuasa 1,000N·m (738 ft.lbs.) untuk aplikasi perindustrian
  巨大的 1,000N · m (738 ft.lbs.)功率适合工业应用




Standard Equipment: Side Grip, Socket

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,200W**
Fastening Capacities Kapasiti 能力	**Standard Bolt: M24 - M30 (15/16" - 1-3/16")**
	High Tensile Bolt: M22 - M24 (7/8" - 15/16")
Square Drive Batang Segi Empat 四方头	**25.4mm (1")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**1,400**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,500**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**1,000N·m (738ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**382x110x290mm (15"x4-5/16"x11-3/8")**
Net Weight Berat Bersih 淨重	**8.8kg (19.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

6906 19mm (3/4") — 100

Impact Wrench
Perengkuh Impak
套筒扳手



- **Powerful 850W motor**
  Motor berkuasa 850W
  强大的850W马达



Standard Equipment: Side Grip, Socket

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**850W**
Capacity Kapasiti 能力	**Standard Bolt: M16 - M22 (5/8" - 7/8")**
	High Tensile Bolt: M16 - M20 (5/8" - 3/4")
Square Drive Batang Segi Empat 四方头	**19mm (3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**1,700**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,600**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**588 N·m (441ft.lbs.)**
Overall Length Dimensi 体积	**327mm (12-7/8")**
Net Weight Berat Bersih 淨重	**5.6kg (12.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

6905B 12.7mm (1/2") — 65

Impact Wrench
Perengkuh Impak
套筒扳手



- **Aluminum hammer case with high durability**
  Casing aluminium yang bertahan
  铝制外壳更耐用



Standard Equipment: Socket 19, 22, 24

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**440W**
Fastening Capacities Kapasiti 能力	**Standard Bolt: M12 - M20 (1/2" - 3/4")**
	High Tensile Bolt: M12 - M16 (1/2" - 5/8")
Square Drive Batang Segi Empat 四方头	**12.7mm (1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**1,700**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**2,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**294N·m (217ft.lbs.)**
Overall Length Dimensi 体积	**270mm (10-5/8")**
Net Weight Berat Bersih 淨重	**2.8kg (6.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

TW0350 12.7mm (1/2") — 411

Impact Wrench
Perengkuh Impak
套筒扳手



- **Large, efficient hammer creates more impacts for greater power**
  Penukul kecekapan tinggi untuk hentaman yang lebih kuat
  高效率锤子给予更强的锤击力



Standard Equipment: Socket

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**400W**
Fastening Capacities Kapasiti 能力	**Standard Bolt: M12 - M22 (1/2" - 7/8")**
	High Tensile Bolt: M12 - M16 (1/2" - 5/8")
Square Drive Batang Segi Empat 四方头	**12.7mm (1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,000**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**2,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**350N·m (260ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**283x87x233mm (11-1/8"x3-7/16"x9-1/8")**
Net Weight Berat Bersih 淨重	**3kg (6.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

DRILLING | FASTENING

TW0200 12.7mm (1/2")

411

Impact Wrench
Perengkuh Impak
套筒扳手





- **Compact and lightweight design for use in tight spaces**
  Sesuai untuk digunakan di ruang kecil
  方便易用于小空间

Standard Equipment: Socket, Hook

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**380W**
Fastening Capacities Kapasiti 能力	**Standard Bolt:** **M10 - M16 (3/8" - 5/8")**
	High Tensile Bolt: **M10 - M12 (3/8" - 1/2")**
Square Drive Batang Segi Empat 四方头	**12.7mm (1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,200**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 2,200**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**200N·m (150ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**251x72x220mm** **(9-7/8"x2-13/16"x8-5/8")**
Net Weight Berat Bersih 淨重	**2.1kg (4.7lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

6922NB M16 (5/8"), M20 (3/4"), M22 (7/8")

411

Shear Wrench
Perengkuh Ricih
扭断式套筒扳手





- **Compact and Lightweight Yet Powerful**
  Kompak dan ringan namun berkuasa
  小巧轻便功能强大

Standard Equipment: Screwdriver, Sleeve M20, Sleeve M22

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,330W**
Capacity Kapasiti 能力	**Bolt : M16, M20, M22** **(5/8", 3/4", 7/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**18**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**804N·m (593ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**249x84x252mm** **(9-13/16"x3-5/16"x9-15/16")**
Net Weight Berat Bersih 淨重	**4.9kg (10.8lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

6924N M22 (7/8"), M24 (1"), SHTB22

303

Shear Wrench
Perengkuh Ricih
扭断式套筒扳手





- **High rotational speed for more efficient operation**
  Kelajuan putaran tinggi untuk operasi yang lebih cekap
  高转速提高操作效率

Standard Equipment: Screwdriver, Sleeve M24

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,050W**
Capacity Kapasiti 能力	**Bolt : M22, M24, 7/8", 1"** **Super high tensile bolt : M22**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**19**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**1,100N·m (810ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**330x104x257mm** **(13"x4-1/8"x10-1/8")**
Net Weight Berat Bersih 淨重	**7.5kg (16.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

HB500 50mm (2")

Magnetic Drill
Gerudi Magnet
磁力钻孔机





- **Magnetic base, drill stand, and drill machine all in one package system**
  Dasar bermagnet, mesin dan penegak gerudi dalam satu sistem
  磁性底座，钻架和钻机集在同一系统

Standard Equipment: Quick release arbor, Small oil cup assembly and clip, Safety guard, Polyester safety strap, Integral oil feed steady allen keys

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,150W**
Capacity Kapasiti 能力	**Steel: 50mm (2")**
Chuck Capacity Kapasiti Chuck 夹头能力	**16mm (5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**350 / 650**
Magnetic Clamping Force Kekuatan Penjepit Magnetik 磁力夹紧力	**Minimum 9,300N (950kg)**
Dimensions (L x W x H) Dimensi 体积	**290x150x450mm** **(11-3/8"x5-7/8"x17-3/4")**
Net Weight Berat Bersih 淨重	**18.5kg (40.8lbs)**

HB350 35mm (1-3/8")

UD00EBD002

Magnetic Drill
Gerudi Magnet
磁力钻孔机





- **Magnetic base, drill stand, and drill machine all in one package system enables for easy setting**
  Dasar bermagnet, mesin dan penegak gerudi dalam satu sistem
  磁性底座，钻架和钻机集在同一系统

Standard Equipment: Small Oil Cup Assembly and Clip, Safety guard, Polyester safety strap, Allen keys

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,050W**
Capacity Kapasiti 能力	**Steel: 35mm (1-3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**850**
Magnetic Clamping Force Kekuatan Penjepit Magnetik 磁力夹紧力	**8,000N**
Dimensions (L x W x H) Dimensi 体积	**270x110x330mm**
Net Weight Berat Bersih 淨重	**11.5kg**

IMPACT DRILLING DEMOLITION

Gerudi | Pemecah 石工钻孔 | 凿鑿加工









HP0300 10mm (3/8") 411

Hammer Driver Drill
Tukul Pemutar Skru Bergerudi
冲击螺丝起子电钻





- **2-mode operation for "Rotation Only" or "Hammering with Rotation"**
  operasi 2 mod, penukulan dengan putaran atau hanya putaran
  2档模式变换，旋转并锤击或仅旋转

Standard Equipment: (+)(-) Bit

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**320W**
Capacity Kapasiti 能力	**Concrete: 8mm (5/16") | Steel: 10mm (3/8") | Wood: 28mm (1-1/8")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.0 - 10mm (1/32 - 3/8")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High: 0 - 22,500 | Low: 0 - 6,750**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,500 | Low: 0 - 450**
Max Fastening Torque Tenaga Pemutaran Pengancing Maksimum 最快扭转	**Hard 56.0N·m (500in.lbs.) Soft: 21.0N·m (190in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大锁定扭力	**42.0N·m (370in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**235x67x206mm (9-1/4"x2-5/8"x8-1/8")**
Net Weight Berat Bersih 淨重	**1.3kg (2.8lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

HP1230 12mm (15/32") 419

Hammer Drill
Gerudi Tukul
冲击电钻





- **2 operation modes - hammering with rotation and rotation only**
  Operasi 2-Mod untuk Putaran Hanya atau
  Hammering with Rotation
  仅旋转或旋转锤击的双模式操作

Standard Equipment: Chuck Key, Depth Gauge, Side Grip

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**400W**
Capacity Kapasiti 能力	**Concrete: 12mm (15/32")/ Steel: 10mm (3/8")/ Wood: 15mm (9/16")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 10mm (1/16 - 3/8")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 31,900**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,900**
Dimensions (L x W x H) Dimensi 体积	**239x67x188mm (9-3/8"x2-5/8"x7-3/8")**
Net Weight Berat Bersih 淨重	**1.7kg (3.7lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

HP1630 16mm (5/8") 85

Hammer Drill
Gerudi Tukul
冲击电钻





- **Lightweight with large drilling capacity up to 16mm in concrete**
  Ringan dengan kapasiti penggerudian yang besar sehingga 16mm dalam konkrit
  轻量，高能力，混凝土钻孔达16mm

Standard Equipment: Side Handle, Chuck Key

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**710W**
Capacity Kapasiti 能力	**Concrete: 16mm (5/8")/ Steel: 13mm (1/2")/ Wood: 30mm (1-3/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 3,200**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 48,000**
Dimensions (L x W x H) Dimensi 体积	**296x75x204mm (11-5/8"x2-15/16"x8")**
Net Weight Berat Bersih 淨重	**2.1kg (4.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

IMPACT DRILLING | DEMOLITION

HP2050 20mm (3/4")

419

2-Speed Hammer Drill
Gerudi Tukul
冲击电钻





- **2-Mode operation for Rotation Only or Hammering with Rotation**
  Operasi 2-Mod untuk Putaran Hanya atau Hammering with Rotation
  仅旋转或旋转锤击的双模式操作

Standard Equipment: Chuck Key, Side Grip, Depth Rod

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**720W**
Capacity Kapasiti 能力	**Concrete: 20mm (3/4")**
	Steel Hi : 8mm (5/16") **Steel Lo : 13mm (1/2")** **Wood Hi : 25mm (1")** **Wood Lo : 40mm (1-9/16")**
Impacts Per Minute (IPM) Kelajuan Tanpa Beban 回转数	**High: 0-58,000** **Low: 0-24,000**
No Load Speed (RPM) Impak Per Minit 冲击数	**High: 0-2,900** **Low: 0-1,200**
Overall Length Panjang Keseluruhan 总长度	**362mm (14-1/4")**
Net Weight Berat Bersih 净重	**2.5kg (5.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

HR1830 18mm (11/16")

419

Rotary Hammer
Tukul Putar
电锤





- **2-Mode operation for Rotation Only or Hammering with Rotation**
  Operasi 2-Mod untuk Putaran Hanya atau Hammering with Rotation
  仅旋转或旋转锤击的双模式操作

Standard Equipment: Side Grip, Depth Gauge

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**440W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 1.2J** **Our experimental conditions: 1.2J**
Capacity Kapasiti 能力	**Concrete: 18mm (11/16")/** **Concrete (Diamond core bit) : 65mm (2-9/16")/** **Steel: 13mm (1/2")/** **Wood: 24mm (15/16")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0-5,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0-1,500**
Dimensions (L x W x H) Dimensi 体积	**279x66x208mm** **(10-7/8"x2-5/8"x8-3/16")**
Net Weight Berat Bersih 净重	**1.9kg (4.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

HR1840 18mm (11/16")

459

Rotary Hammer
Tukul Putar
电锤





- **2-Mode operation for Rotation Only or Hammering with Rotation**
  Operasi 2-Mod untuk Putaran Hanya atau Hammering with Rotation
  仅旋转或旋转锤击的双模式操作

Standard Equipment: Side Grip, Depth Gauge

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**470W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 1.4J** **Our experimental conditions: 1.4J**
Capacity Kapasiti 能力	**Concrete: 18mm (11/16")/** **Core Bit: 35mm (1-3/8")/** **Diamond Core Bit (Dry Type): 65mm (2-9/16")/** **Steel: 13mm (1/2")/ Wood: 24mm (15/16")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,800**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,100**
Dimensions (L x W x H) Dimensi 体积	**285x75x208mm** **(11-1/4"x3"x8-3/16")**
Net Weight Berat Bersih 净重	**2.0 - 2.4kg (4.3 - 5.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

HR1841F 18mm (11/16")

459

Rotary Hammer
Tukul Putar
电锤





- **2 operation modes - "Hammering with Rotation" and "Rotation" only**
  2 mod operasi - "Mengetuk dengan Putaran" dan "Putaran" sahaja
  2种操作模式 - “旋转锤击”和“旋转”

Standard Equipment: Side Grip, Depth Gauge

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**470W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 1.4J** **Our experimental conditions: 1.4J**
Capacity Kapasiti 能力	**Concrete: 18mm (11/16")/** **Core Bit: 35mm (1-3/8")/** **Diamond Core Bit (Dry Type): 65mm (2-9/16")/** **Steel: 13mm (1/2")/ Wood: 24mm (15/16")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,800**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,100**
Dimensions (L x W x H) Dimensi 体积	**285x75x208mm** **(11-1/4"x3"x8-3/16")**
Net Weight Berat Bersih 净重	**2.0 - 2.5kg (4.5 - 5.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

HR2020 20mm (3/4")

419

Rotary Hammer
Tukul Putar
电锤





- **2-Mode operation for Rotation Only or Hammering with Rotation**
  Operasi 2-Mod untuk hanya putaran, penukulan dengan putaran sahaja
  仅旋转或旋转锤击的双模式操作

Standard Equipment: Side Grip, Depth Gauge

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**710W**
Capacity Kapasiti 能力	**Concrete: 20mm (3/4")/** **Steel: 13mm (1/2")/ Wood: 32mm (1-1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,050**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 1,050**
Overall Length Panjang Keseluruhan 总长度	**352mm (13-7/8")**
Net Weight Berat Bersih 净重	**2.3kg (5.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**4.0m (13.1ft)**

IMPACT DRILLING | DEMOLITION

HR2320T / X2 23mm (7/8")

325

Combination Hammer
Tukul Kombinasi
电冲击钻锤



3 modes



- **3-Mode operation; rotation only, hammering with rotation and hammering only**
  operasi 3 mod: hanya putaran, penukulan dengan putaran, penukulan sahaja
  3档模式变换: 仅旋转，旋转并锤击，仅锤击

Standard Equipment:
HR2320T: Side Handle, Depth Gauge, Quick Change Drill Chuck (194079-2)
HR2320TX2: Side Handle, Depth Gauge, Quick Change Drill Chuck (194079-2), SDS-Plus Drill & Chisel Set (D-46361)



Quick change Drill Chuck, Drill Bit & Chisel Set
For HR2320TX2 only

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**720W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 2.3J** **Our experimental conditions: 2.6J**
Capacity Kapasiti 能力	**Concrete: 23mm (7/8")/** **Steel: 13mm (1/2")/ Wood: 32mm (1-1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,600**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 1,200**
Dimensions (L x W x H) Dimensi 体积	**380x77x209mm** **(15"x3"x8-1/4")**
Net Weight Berat Bersih 净重	**2.9 - 3.2kg (6.4 - 7.0 lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2 ft)**


HR2470X5 24mm (15/16")

325

Combination Hammer
Tukul Kombinasi
电冲击钻锤




3 modes



- **3-Mode operation; rotation only, hammering with rotation and hammering only**
  operasi 3 mod: hanya putaran, penukulan dengan putaran , penukulan sahaja
  3档模式变换: 仅旋转，旋转并锤击，仅锤击

Standard Equipment: Side Handle, Depth Gauge, Drill Chuck (194041-7), SDS-Plus Bit Set (D-17784), Bull Point (D-08713)



Come with
Drill Chuck 13mm, Drill Bit & Chisel Set

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**780W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 2.4J** **Our experimental conditions: 2.7J**
Capacity Kapasiti 能力	**Concrete: 24mm (15/16")/** **Core Bit: 54mm (2-1/8")/** **Steel: 13mm (1/2")/** **Wood: 32mm (1-1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,500**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 1,100**
Dimensions (L x W x H) Dimensi 体积	**370x84x214mm** **(14-1/2"x3-5/16"x8-3/8")**
Net Weight Berat Bersih 净重	**2.9 - 3.3kg (6.4 - 7.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**4.0m (13.1ft)**


HR2631FTX2 26mm (1")

325

Combination Hammer
Tukul Kombinasi
电冲击钻锤



3 modes



- **3-Mode operation; rotation only, hammering with rotation and hammering only**
  operasi 3 mod: hanya putaran, penukulan dengan putaran , penukulan sahaja
  3档模式变换: 仅旋转，旋转并锤击，仅锤击

Standard Equipment: Side Handle, Depth Gauge, Quick Change Drill Chuck, SDS-Plus Drill & Chisel Set



Come with
Quick change Drill Chuck, Drill Bit & Chisel Set

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**800W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 2.4J** **Our experimental conditions: 2.9J**
Capacity Kapasiti 能力	**Concrete: 26mm (1")/** **Core Bit: 68mm (2-11/16")/** **Diamond Core Bit (Dry Type): 80mm (3-1/8")/** **Steel: 13mm (1/2")/ Wood: 32mm (1-1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,600**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 1,200**
Dimensions (L x W x H) Dimensi 体积	**385x77x209mm** **(15-1/8"x3"x8-1/4")**
Net Weight Berat Bersih 净重	**3.1 - 3.6kg (6.8 - 7.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

HR2611FT 26mm (1")

325

Combination Hammer
Tukul Kombinasi
电冲击钻锤



3 modes



- **Extremely low vibration achieved by Anti-Vibration Technology**
  Getaran rendah dengan Teknologi anti-getaran AVT
  AVT防振技术降低振动

Sementara stok masih ada 售完即止
WHILE STOCK LAST

Standard Equipment: Side Grip, Depth Gauge, Quick Change Drill Chuck

Come with
Quick Change Drill Chuck

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**800W**
Impact Energy Kekuatan Impak 单次最大锤击力	**2.4J**
Capacity Kapasiti 能力	**Concrete: 26mm (1")/** **Steel: 13mm (1/2")/ Wood: 32mm (1-1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0-4,600**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0-1,200**
Dimensions (L x W x H) Dimensi 体积	**385x77x209mm** **(15-1/8"x3"x8-1/4")**
Net Weight Berat Bersih 净重	**3.0kg (6.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**


HR2630X3 26mm (1")

325

Combination Hammer
Tukul Kombinasi
电冲击钻锤



3 modes



- **3-Mode operation; rotation only, hammering with rotation and hammering only**
  operasi 3 mod: hanya putaran, penukulan dengan putaran , penukulan sahaja
  3档模式变换: 仅旋转，旋转并锤击，仅锤击


Standard Equipment: Side Handle, Depth Gauge, Drill Chuck, SDS-Plus Drill & Chisel Set



Come with
Drill Chuck 13mm, Drill Bit & Chisel Set

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**800W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 2.4J** **Our experimental conditions: 2.9J**
Capacity Kapasiti 能力	**Concrete: 26mm (1")/** **Core Bit: 68mm (2-11/16")/** **Diamond Core Bit (Dry Type): 80mm (3-1/8")/** **Steel: 13mm (1/2")/ Wood: 32mm (1-1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,600**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 1,200**
Dimensions (L x W x H) Dimensi 体积	**385x77x209mm** **(15-1/8"x3"x8-1/4")**
Net Weight Berat Bersih 净重	**2.8 - 3.3kg (6.3 - 7.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

IMPACT DRILLING | DEMOLITION

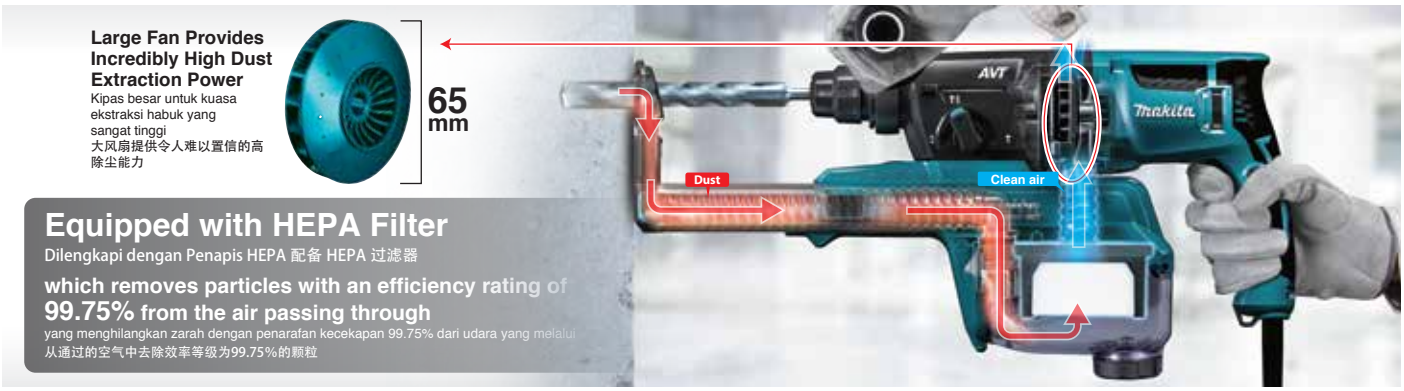

HR2652 26mm (1")

325

Combination Hammer with Self Dust Collection
Tukul Kombinasi dengan Sistem Pengumpulan Habuk
电冲击钻锤与集尘系统

3 modes



- **See-through dust case for easy checking of collected dust amount**
  Tahap pengumpulan habuk mudah dilihat dengan kotak habuk lutsinar
  透视集尘盒方便检查集尘量

Standard Equipment: Side Grip, Depth Gauge, Sealing Cap

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**800W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 2.2J** **Our experimental conditions: 2.9J**
Capacity Kapasiti 能力	**Concrete: 26mm (1")/** **Core Bit: 68mm (2-11/16")/** **Diamond Core Bit: 80mm (3-1/8")/** **Steel: 13mm (1/2")/ Wood: 32mm (1-1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,600**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 1,200**
Dimensions (L x W x H) Dimensi 体积	**604x89x260mm** **(23-3/4"x3-1/2"x10-1/4")**
Net Weight Berat Bersih 净重	**3 - 4.3kg (6.7 - 9.4lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

HR2810 28mm (1-1/8")

325

Combination Hammer
Tukul Kombinasi
电冲击钻锤



3 modes



- **3-Mode operation; rotation only, hammering with rotation and hammering only**
  operasi 3 mod: hanya putaran, penukulan dengan putaran , penukulan sahaja
  3档模式变换: 仅旋转，旋转并锤击，仅锤击

Standard Equipment: Depth Gauge, Side Grip

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**800W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 2.8J** **Our experimental conditions: 2.9J**
Capacity Kapasiti 能力	**Concrete (T.C.T. bit) : 28mm (1-1/8")/** **Steel: 13mm (1/2")/ Wood: 32mm (1-1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,500**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 1,100**
Dimensions (L x W x H) Dimensi 体积	**314x89x225mm** **(12-3/8"x3-1/2"x8-7/8")**
Net Weight Berat Bersih 净重	**3.4 - 3.8kg (7.5 - 8.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

HR3011FCJ 30mm (1-3/16")

350

Combination Hammer
Tukul Kombinasi
电冲击钻锤



3 modes



- **3-mode operation for "Rotation Only", "Hammering with Rotation" or "Hammering Only"**
  operasi 3 mod: hanya putaran, penukulan dengan putaran , penukulan sahaja
  3档模式变换: 仅旋转，旋转并锤击，仅锤击

Standard Equipment: Depth Gauge, Side Grip

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,050W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 3.9J** **Our experimental conditions: 4.5J**
Capacity Kapasiti 能力	**Concrete (Core Bit): 80mm (3-1/8")** **Concrete (Diamond Core Bit): 80mm (3-1/8")** **Concrete (TCT Bit): 30mm (1-3/16")** **Steel: 13mm (1/2")** **Wood: 32mm (1-1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4500**
Dimensions (L x W x H) Dimensi 体积	**369x98x242mm** **(14-1/2x3-7/8x9-1/2")**
Net Weight Berat Bersih 净重	**4.4 - 4.8kg (9.7 - 10.6lbs.)**
Power Supply Cord Kabel Wayar 电源线	**4.0m (13.1ft)**

HR3001CJ 30mm (1-3/16")

350

Combination Hammer
Tukul Kombinasi
电冲击钻锤



3 modes



- **3-mode operation for "Rotation Only", "Hammering with Rotation" or "Hammering Only"**
  operasi 3 mod: hanya putaran, penukulan dengan putaran , penukulan sahaja
  3档模式变换: 仅旋转，旋转并锤击，仅锤击

Standard Equipment: Depth Gauge, Side Grip

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,050W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 3.9J** **Our experimental conditions: 4.5J**
Capacity Kapasiti 能力	**Concrete (Core Bit): 80mm (3-1/8")** **Concrete (Diamond Core Bit): 80mm (3-1/8")** **Concrete (TCT Bit): 30mm (1-3/16")** **Steel: 13mm (1/2")** **Wood: 32mm (1-1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4500**
Dimensions (L x W x H) Dimensi 体积	**369x98x226mm** **(14-1/2 x 3-7/8 x 8-7/8")**
Net Weight Berat Bersih 净重	**4.1 - 4.5kg (9.0 - 9.9lbs.)**
Power Supply Cord Kabel Wayar 电源线	**4.0m (13.1ft)**

IMPACT DRILLING | DEMOLITION

HR3210C 32mm (1-1/4")

350

Combination Hammer
Tukul Kombinasi
电冲击钻锤



3 modes



- **3-Mode operation; rotation only, hammering with rotation and hammering only**
  operasi 3 mod: hanya putaran, penukulan dengan putaran , penukulan sahaja
  3档模式变换: 仅旋转，旋转并锤击，仅锤击

Standard Equipment: Depth Gauge, Side Grip, Grease vessel

AVT ANTI VIBRATION TECHNOLOGY

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**850W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 5J** **Our experimental conditions: 5.5J**
Capacity Kapasiti 能力	**Concrete (T.C.T. bit) : 32mm (1-1/4")/ Steel: 13mm (1/2")/ Wood: 32mm (1-1/4")/ Concrete (Core bit) : 90mm (3-1/2")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,650 - 3,300**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**315 - 630**
Dimensions (L x W x H) Dimensi 体积	**398x114x239mm (15-5/8"x4-1/2"x9-3/8")**
Net Weight Berat Bersih 淨重	**5.2 - 5.6kg (11.4 - 12.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HR3200C 32mm (1-1/4")

350

Combination Hammer
Tukul Kombinasi
冲击电钻电锤



3 modes



- **3-Mode operation; rotation only, hammering with rotation and hammering only**
  operasi 3 mod: hanya putaran, penukulan dengan putaran , penukulan sahaja
  3档模式变换: 仅旋转，旋转并锤击，仅锤击

Standard Equipment: Depth Gauge, Side Grip, Grease Vessel (181573-3)

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**850W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 5.1J** **Our experimental conditions: 5.5J**
Capacity Kapasiti 能力	**Concrete (T.C.T. bit) : 32mm (1-1/4")/ Steel: 13mm (1/2")/ Wood: 32mm (1-1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,650 - 3,300**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**315 - 630**
Dimensions (L x W x H) Dimensi 体积	**398x108x239mm (15-5/8"x4-1/4"x9-3/8")**
Net Weight Berat Bersih 淨重	**4.8 - 5.2kg (10.5 - 11.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HR3530 35mm (1-3/8")

350

Rotary Hammer
Tukul Putar
电锤





- **Compact and lightweight design**
  Kompak dan ringan
  小巧轻便

Standard Equipment: Side Grip, Depth Gauge

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,010W**
Impact Energy Kekuatan Impak 单次最大锤击力	**Our experimental conditions: 6.2J**
Capacity Kapasiti 能力	**Concrete (T.C.T. bit) : 35mm (1-3/8")/ Concrete (Core bit) : 105mm (4-1/8")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**3,100**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**760**
Dimensions (L x W x H) Dimensi 体积	**374x100x243mm (14-3/4"x3-15/16"x9-9/16")**
Net Weight Berat Bersih 淨重	**5.8kg (12.8lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HR4001C 40mm (1-9/16")

350

Rotary Hammer
Tukul Putar
电锤



2 modes



- **2-Mode operation for Rotation with Hammering or Hammering only**
  Operasi 2-Mod untuk penukulan dengan putaran, penukulan sahaja
  仅锤击或旋转锤击的双模式操作

Standard Equipment: Depth Gauge, Side Grip, Grease vessel

Continuous RatingInput Input Kuasa Berterusan 额定输入功率	**1,100W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 6.8J** **Our experimental conditions: 9.5J**
Capacity Kapasiti 能力	**Concrete (T.C.T. bit): 40mm (1-9/16")/ Concrete (Core bit): 105mm (4-1/8")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,350-2,750**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**235-480**
Dimensions (L x W x H) Dimensi 体积	**468x106x261mm (18-1/2"x4-3/16"x10-1/4")**
Net Weight Berat Bersih 淨重	**5.9kg (13.0lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HR4002 40mm (1-9/16")

350

Rotary Hammer
Tukul Putar
电锤



2 modes



- **2-Mode operation for Rotation with Hammering or Hammering only**
  Operasi 2-Mod untuk penukulan dengan putaran, penukulan sahaja
  仅锤击或旋转锤击的双模式操作

Standard Equipment: Side Grip, Bit Grease, Depth Gauge

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,050W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 6.1J** **Our experimental conditions: 6.2J**
Capacity Kapasiti 能力	**Concrete (T.C.T. bit) : 40mm (1-9/16")/ Concrete (Core bit) : 105mm (4-1/8")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**2,500**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**680**
Dimensions (L x W x H) Dimensi 体积	**458x114x256mm (18"x4-1/2 "x10-1/8")**
Net Weight Berat Bersih 淨重	**6.6 - 6.8kg (14.6 - 15.0lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

IMPACT DRILLING | DEMOLITION

HR4003C 40mm (1-9/16")

350

Rotary Hammer
Tukul Putar
电锤



2 modes



- **2-Mode operation for Rotation with Hammering or Hammering only**
  Operasi 2-Mod untuk penukulan dengan putaran, penukulan sahaja
  仅锤击或旋转锤击的双模式操作

Standard Equipment: Depth Gauge, Side Handle, Bit Grease, Cloth

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	1,100W
Impact Energy Kekuatan Impak 单次最大锤击力	EPTA-Procedure 05/2009: 8.3J Our experimental conditions: 11.4J
Capacity Kapasiti 能力	Concrete (T.C.T. bit) : 40mm (1-9/16")/ Concrete (Core bit) : 105mm (4-1/8")
Impacts Per Minute (IPM) Impak Per Minit 冲击数	1,450 - 2,900
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	250 - 500
Dimensions (L x W x H) Dimensi 体积	479x106x263mm (18-11/16"x4-3/16"x10-3/8")
Net Weight Berat Bersih 净重	6.2 - 6.4kg (13.7 - 14.1lbs)
Power Supply Cord Kabel Wayar 电源线	5.0m (16.4ft)

HR4013C 40mm (1-9/16")

350

Rotary Hammer
Tukul Putar
电锤



2 modes



- **2-Mode operation for Rotation with Hammering or Hammering only**
  Operasi 2-Mod untuk penukulan dengan putaran, penukulan sahaja
  仅锤击或旋转锤击的双模式操作

Standard Equipment: Depth Gauge, Side Handle (D), Side Grip, Bit Grease, Cloth

AVT SOFT NO LOAD

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	1,100W
Impact Energy Kekuatan Impak 单次最大锤击力	EPTA-Procedure 05/2009: 8J Our experimental conditions: 11.4J
Capacity Kapasiti 能力	Concrete (T.C.T. bit) : 40mm (1-9/16")/ Concrete (Core bit) : 105mm (4-1/8")
Impacts Per Minute (IPM) Impak Per Minit 冲击数	1,450 - 2,900
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	250 - 500
Dimensions (L x W x H) Dimensi 体积	479x112x263mm (18-11/16"x4-3/8"x10-3/8")
Net Weight Berat Bersih 净重	6.8 - 6.9kg (14.9 - 15.3lbs)
Power Supply Cord Kabel Wayar 电源线	5.0m (16.4ft)

HR4030C 40mm (1-9/16")

350

Rotary Hammer
Tukul Putar
电锤



2 modes



- **2-Mode operation for Rotation with Hammering or Hammering only**
  Operasi 2-Mod untuk penukulan dengan putaran, penukulan sahaja
  仅锤击或旋转锤击的双模式操作

Standard Equipment: Depth Gauge, Side Grip

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	1,100W
Impact Energy Kekuatan Impak 单次最大锤击力	Our experimental conditions: 9.2J
Capacity Kapasiti 能力	Concrete (T.C.T. bit) : 40mm (1-9/16")/ Concrete (Core bit) : 118mm (4-5/8")
Impacts Per Minute (IPM) Impak Per Minit 冲击数	1,300 - 2,600
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	230 - 460
Dimensions (L x W x H) Dimensi 体积	413x107x247mm (16-1/4"x4-1/4"x9-3/4")
Net Weight Berat Bersih 净重	6.9kg (15.2lbs)
Power Supply Cord Kabel Wayar 电源线	5.0m (16.4ft)

HR4501C 45mm (1-3/4")

175

Rotary Hammer
Tukul Putar
电锤



2 modes



- **High performance and durability**
  Prestasi dan ketahanan tinggi
  高性能兼耐用

Standard Equipment: Side Handle (D), Side Grip, Depth Gauge, Grease Vessel, Cloth

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	1,350W
Impact Energy Kekuatan Impak 单次最大锤击力	EPTA-Procedure 05/2009: 10.1J Our experimental conditions: 12.5J
Capacity Kapasiti 能力	Concrete (T.C.T. bit) : 45mm (1-3/4")/ Concrete (Core bit) : 125mm (5")
Impacts Per Minute (IPM) Impak Per Minit 冲击数	1,250 - 2,750
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	130 - 280
Dimensions (L x W x H) Dimensi 体积	458x121x288mm (18"x4-3/4"x11-3/8")
Net Weight Berat Bersih 净重	8.2 - 8.4kg (18.1 - 18.5lbs)
Power Supply Cord Kabel Wayar 电源线	5.0m (16.4ft)

HR4511C 45mm (1-3/4")

175

Rotary Hammer
Tukul Putar
电锤



2 modes



- **2-Mode operation for Rotation with Hammering or Hammering only**
  Operasi 2-Mod untuk penukulan dengan putaran, penukulan sahaja
  仅锤击或旋转锤击的双模式操作

Standard Equipment: Side handle (D), Side Grip, Depth Gauge, Grease Vessel, Cloth

AVT

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	1,350W
Impact Energy Kekuatan Impak 单次最大锤击力	EPTA-Procedure 05/2009: 9.4J Our experimental conditions: 12.5J
Capacity Kapasiti 能力	Concrete (T.C.T. bit) : 45mm (1-3/4")/ Concrete (Core bit) : 125mm (5")
Impacts Per Minute (IPM) Impak Per Minit 冲击数	1,250 - 2,750
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	130 - 280
Dimensions (L x W x H) Dimensi 体积	458x136x288mm (18"x5-3/8"x11-3/8")
Net Weight Berat Bersih 净重	9.0 - 9.1kg (19.8 - 20.1lbs)
Power Supply Cord Kabel Wayar 电源线	5.0m (16.4ft)

IMPACT DRILLING | DEMOLITION

HR5202C 52mm (2-1/16")

175

Rotary Hammer
Tukul Putar
电锤



2 modes



- **2-Mode operation for Rotation with Hammering or Hammering only**
  Operasi 2-Mod untuk penukulan dengan putaran, penukulan sahaja
  仅锤击或旋转锤击的双模式操作

Standard Equipment: Side handle (D), Side Grip, Depth Gauge, Grease Vessel, Cloth

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,510W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 19.1J** **Our experimental conditions: 21J**
Capacity Kapasiti 能力	**Concrete (T.C.T. bit) : 52mm (2")/** **Concrete (Core bit) : 160mm (6-5/16")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,100 - 2,250**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**150 - 310**
Dimensions (L x W x H) Dimensi 体积	**599x134x287mm** **(23-1/2"x5-1/4"x11-1/4")**
Net Weight Berat Bersih 净重	**10.9 - 11.1kg (24.1 - 24.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HR5211C 52mm (2-1/16")

175

Rotary Hammer
Tukul Putar
电锤



2 modes



- **2-Mode operation for Rotation with Hammering or Hammering only**
  Operasi 2-Mod untuk penukulan dengan putaran, penukulan sahaja
  仅锤击或旋转锤击的双模式操作

Standard Equipment: Side handle (D), Side Grip, Depth Gauge, Grease Vessel

AVT ANTI VIBRATION TECHNOLOGY

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,500W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 18.9J** **Our experimental conditions: 20J**
Capacity Kapasiti 能力	**Concrete (T.C.T. bit) : 52mm (2")/** **Concrete (Core bit) : 160mm (6-1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,075 - 2,150**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**130 - 260**
Dimensions (L x W x H) Dimensi 体积	**599x149x287mm** **(23-1/2"x5-7/8"x11-1/4")**
Net Weight Berat Bersih 净重	**12.2kg (26.8lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HR5212C 52mm (2-1/16")

175

Rotary Hammer
Tukul Putar
电锤



2 modes



- **2-Mode operation for Rotation with Hammering or Hammering only**
  Operasi 2-Mod untuk penukulan dengan putaran, penukulan sahaja
  仅锤击或旋转锤击的双模式操作

Standard Equipment: Side Handle, Side Grip, Depth Gauge, Grease Vessel, Cloth

AVT ANTI VIBRATION TECHNOLOGY SOFT NO LOAD

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,510W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 20J** **Our experimental conditions: 21J**
Capacity Kapasiti 能力	**Concrete (T.C.T. bit) : 52mm (2")/** **Concrete (Core bit) : 160mm (6-5/16")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,100 - 2,250**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**150 - 310**
Dimensions (L x W x H) Dimensi 体积	**599x140x287mm** **(23-1/2"x5-1/2"x11-1/4")**
Net Weight Berat Bersih 净重	**11.9 - 12.0kg (26.2 - 26.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HM0810TA 17mm (11/16") Hex Shank

105

Demolition Hammer
Pemahat Tukul Elektrik
电动槌





- **Ideal for light chiseling, chipping and scaling operations**
  Sesuai untuk operasi ringan untuk pahatan, penyerpihan dan perskalaan
  适用于轻凿击，碎击和铲除原有表面等操作

Standard Equipment: Bull Point, Hex Wrench, Side Grip

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**900W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 7.2J** **Our experimental conditions: 7.6J**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**2,900**
Overall Length Panjang Keseluruhan 总长度	**428mm (16-7/8")**
Net Weight Berat Bersih 净重	**6.3kg (13.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**







IMPACT DRILLING | DEMOLITION

HM0870C

350

Demolition Hammer
Pemahat Tukul Elektrik
电动槌





- **Compact Power with Less Weight**
  Kompak dan ringan
  紧凑更量

Standard Equipment: Grease for bit, Side Handle, Cloth

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,100W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 7.6J** **Our experimental conditions: 11.4J**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,100 - 2,650**
Dimensions (L x W x H) Dimensi 体积	**449x109x230mm** **(17-3/4"x4-1/4"x9")**
Net Weight Berat Bersih 淨重	**5.1 - 5.3kg (11.1 - 11.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HM0871C

350

Demolition Hammer
Pemahat Tukul Elektrik
电动槌





- **High durability and excellent demolition performance**
  Ketahanan dan prestasi yang tinggi
  高耐用性

Standard Equipment: Grease for bit, Side Handle, Cloth

AVT SOFT NO LOAD

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,100W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 8.1J** **Our experimental conditions: 11.6J**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,100 - 2,650**
Dimensions (L x W x H) Dimensi 体积	**466x116x230mm** **(18-3/8"x4-9/16"x9")**
Net Weight Berat Bersih 淨重	**5.6 - 5.8kg (12.4 - 12.8lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HM1201 21mm (13/16") Hex Shank

155

Demolition Hammer
Pemahat Tukul Elektrik
电动槌





- **Powerful impact from durable aluminum body**
  Tahan lama dan berkuasa
  耐用铝合金机身提供强大的冲击力

Standard Equipment: Bull Point, Hex Wrench, Side Grip

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,130W**
Impact Energy Kekuatan Impak 单次最大锤击力	**Our experimental conditions: 13J**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**2,000**
Overall Length Panjang Keseluruhan 总长度	**480mm (18-7/8")**
Net Weight Berat Bersih 淨重	**9.1kg (20.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HM1213C

175

Demolition Hammer
Pemahat Tukul Elektrik
电动槌





- **Vibration absorbing handle provides comfortable operation**
  Pemegang menyerap getaran untuk operasi yang selesa
  吸振手柄提供舒适的操作

Standard Equipment: Bull Point, Bit Grease, Side Handle, Cloth

AVT SOFT NO LOAD

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,510W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 18.6J** **Our experimental conditions: 25.5J**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**950 - 1,900**
Dimensions (L x W x H) Dimensi 体积	**576x149x265mm** **(22-3/4"x5-7/8"x10-3/8")**
Net Weight Berat Bersih 淨重	**10.8kg (23.7lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HM1203C

175

Demolition Hammer
Pemahat Tukul Elektrik
电动槌





- **Increasing energy transfer for more power**
  Meningkatkan pemindahan tenaga untuk lebih banyak kuasa
  增加能量传递以获得更多电力

Standard Equipment: Bull Point, Bit Grease, Side Handle

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,510W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 19.1J** **Our experimental conditions: 25.5J**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**950 - 1,900**
Dimensions (L x W x H) Dimensi 体积	**576x128x265mm** **(22-3/4"x5"x10-3/8")**
Net Weight Berat Bersih 淨重	**9.7kg (21.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

IMPACT DRILLING | DEMOLITION

HM1214C

175

Demolition Hammer
Pemahat Tukul Elektrik
电动槌



- **Powerful 1,510W motor**
  Motor berkuasa 1,510W
  强大马达1,510W

Standard Equipment: Bull Point, Bit Grease, Side Handle, Cloth

AVT SOFT NO LOAD



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,510W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 19.9J** **Our experimental conditions: 26J**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**950 - 1,900**
Dimensions (L x W x H) Dimensi 体积	**700x129x265mm** **(27-1/2"x5-1/8"x10-3/8")**
Net Weight Berat Bersih 淨重	**12.3kg (27.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HM1306 30mm (1-3/16") Hex Shank

204

Demolition Hammer
Pemahat Tukul Elektrik
电动槌



- **Powerful 1,510W motor**
  Motor berkuasa 1,510W
  强大马达1,510W

Standard Equipment: Bull Point, Wrench, Side Handle, Oil Supply 100ml



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,510W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 21.7J** **Our experimental conditions: 28.8J**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,450**
Dimensions (L x W x H) Dimensi 体积	**652x121x231mm** **(25-3/4"x4-3/4"x9-1/8")**
Net Weight Berat Bersih 淨重	**15.1kg (33.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HM1317C 30mm (1-3/16") Hex Shank

175

Electric Breaker
Tukul Elektrik
电动鎚



- **High durability and excellent demolition performance**
  Ketahanan dan berprestasi tinggi
  高耐用性

Standard Equipment: Side Handle

AVT SOFT NO LOAD



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,510W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009:** **25 (100-127 V: 21) J** **Our experimental conditions: 33.8 J**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**730 - 1,450**
Dimensions (L x W x H) Dimensi 体积	**715x129x266mm** **(28-1/8"x5-1/8"x10-1/2")**
Net Weight Berat Bersih 淨重	**17kg (37.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HM1307C 30mm (1-3/16") Hex Shank

175

Electric Breaker
Tukul Elektrik
电动鎚



- **Electronic Controller for Operator Convenience**
  Kawalan Elektronik memudahkan pengguna
  电子控制方便使用

Standard Equipment: Side Handle, Bull Point



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,510W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 25.5J** **Our experimental conditions: 33.8J**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**730 - 1,450**
Dimensions (L x W x H) Dimensi 体积	**715x129x266mm** **(28-1/8"x5-1/8"x10-1/2")**
Net Weight Berat Bersih 淨重	**15.3kg (33.8lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HM1501 30mm (1-3/16") Hex Shank

218

Electric Breaker
Tukul Kombinasi
电冲击钻锤

- **Both drastically increased power and low vibration are achieved with minimum increase in tool size and weight**
  Mencapai peningkatan daya yang kuat dan getaran rendah dengan ukuran alat dan berat yang terkecil
  以最小的工具尺寸和重量增加实现了功率的急剧增加和低振动

Standard Equipment: Side Handle, Bull Point



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,850W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 48.1J**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,300**
Dimensions (L x W x H) Dimensi 体积	**781x130x266mm** **(30-3/4x5-1/8x10-1/2")**
Net Weight Berat Bersih 淨重	**18.4kg (40.6lbs.)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

IMPACT DRILLING | DEMOLITION

HM1511 30mm (1-3/16") Hex Shank

218

Electric Breaker
Tukul Kombinasi
电冲击钻锤



- **Both drastically increased power and low vibration are achieved with minimum increase in tool size and weight**
  Mencapai peningkatan daya yang kuat dan getaran rendah dengan ukuran alat dan berat yang terkecil
  以最小的工具尺寸和重量增加实现了功率的急剧增加和低振动

Standard Equipment: Side Handle, Bull Point

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,850W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 48.9J**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,300**
Dimensions (L x W x H) Dimensi 体积	**781x130x266mm (30-3/4x5-1/8x10-1/2")**
Net Weight Berat Bersih 净重	**19.2kg (42.3lbs.)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HM1810 28.6mm (1-1/8") Hex Shank

204

Electric Breaker
Tukul Elektrik
电动鎚





- **Powerful 2,000W motor**
  Motor berkuasa 2,000W
  强大马达2,000W

Standard Equipment: Hex Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,000W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 44.9J** **Our experimental conditions: 63J**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,100**
Dimensions (L x W x H) Dimensi 体积	**824x146x633mm (32-1/2"x5-3/4"x25")**
Net Weight Berat Bersih 净重	**32.0kg (70.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HM1812 28.6mm (1-1/8") Hex Shank

218

Electric Breaker
Tukul Elektrik
电动鎚





- **Hits like air without the vibration**
  Tukulan mudah
  轻易槌击

Standard Equipment: Bull Point, Hex Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,000W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 72.8J** **Our experimental conditions: 62J**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**870**
Dimensions (L x W x H) Dimensi 体积	**843x210x608mm (33-1/4"x8-1/4"x24")**
Net Weight Berat Bersih 净重	**31.3kg (69lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HK1820

350

Power Scraper
Pengikis Elektrik
电动刮剥机





- **Large trigger switch with variable speed control function**
  Suis pencetus yang besar dengan fungsi kawalan kelajuan
  备用变速控制功能的大型触发开关

Standard Equipment: Bull Point, Scaling Chisel, Scaling chisel (for tile), Hook complete

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**550W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 3.1J** **Our experimental conditions: 3.9J**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,200**
Dimensions (L x W x H) Dimensi 体积	**351x102x203mm (13-3/4"x4"x8")**
Net Weight Berat Bersih 净重	**3.4kg (7.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**


Combination / Rotary Hammer Drill Capability Chart

Jadual keupayaan gerudi 钻孔能力表


Tungsten Carbide-tipped usable range | Recommended range | Core bits | ✓✓✓ Optimal | ✓ Possible

			Impact energy according to EPTA05/2009: J	EPTA Weight (kg)	0 10 20 30 40 50 60 70 80 90 100 110 120 130 140 150 160	MATERIAL FOR DRILLING: Highly reinforced concrete	Concrete, granite, stone, brick	Metal/ wood	Working direction
14mm series	HR140D SDS-plus		1.0J	1.9 - 2.6	3.2-14 3.2-10	✓	✓✓✓	✓	
16mm series	DHR165 SDS-plus		1.3J	2.3 - 3.0	3.2-16 3.2-10 35 Diamond core 32 (dry type)	✓	✓✓✓	✓	
16mm series	HR166D SDS-plus		1.1J	1.8 - 2.4	3.2-16 3.2-10	✓	✓✓✓	✓	
17mm series	DHR171 SDS-plus		1.2J	2.1 - 2.8	3.2-17 3.2-10	✓	✓✓✓	✓	
18mm series	DHR182 SDS-plus		1.7J	2.4 - 3.2	3.2-18 3.2-10 35 Diamond core 32 (dry type)	✓	✓✓✓	✓	
18mm series	HR1841F SDS-plus		1.4J	2.0 - 2.5	3.2-18 3.2-10 35 Diamond core 32 ~ 65 (dry type)	✓	✓✓✓	✓	
18mm series	HR1840 SDS-plus		1.4J	2.0 - 2.5	3.2-18 3.2-10 35 Diamond core 32 ~ 65 (dry type)	✓	✓✓✓	✓	
18mm series	HR1830 SDS-plus		1.2J	1.9	3.2-18 3.2-10 35 Diamond core 32 ~ 65 (dry type)	✓	✓✓✓	✓	
20mm series	DHR202 SDS-plus		1.9J	3.2 - 4.0	3.2-20 4-12 35-54 Diamond core 32 (dry type)	✓	✓✓✓	✓	
20mm series	DHR241 SDS-plus		1.9J	3.2 - 4.0	3.2-20 4-12 35-54 Diamond core 32 (dry type)	✓	✓✓✓	✓	
20mm series	HR2020 SDS-plus		2.2J	2.6	3.2-20 4-12 35-54 Diamond core 32 ~ 65 (dry type)	✓	✓✓✓	✓	
23mm series	HR2320T SDS-plus		2.3J	2.9 - 3.2	3.2-23 4-15 35-68 Diamond core 32 ~ 70 (dry type)	✓	✓✓✓	✓	
24mm series	DHR242 SDS-plus		2.0J	3.1 - 3.8	3.2-24 4-16 35-54 Diamond core 32 ~ 65 (dry type)	✓	✓✓✓	✓	
24mm series	HR2470 SDS-plus		2.4J	2.9 - 3.3	3.2-24 4-16 35-54 Diamond core 32 ~ 65 (dry type)	✓	✓✓✓	✓	
26mm series	DHR263 SDS-plus		2.5J	4.1 - 5.1	3.2-26 4-18 35-54 Diamond core 32 ~ 65 (dry type)	✓	✓✓✓	✓	
26mm series	HR2652 SDS-plus		2.2J	3.0 - 4.3	3.2-26 4-18 35-68 Diamond core 32 ~ 80 (dry type)	✓	✓✓✓	✓	
26mm series	HR2631FT SDS-plus		2.4J	2.8 - 3.5	3.2-26 4-18 35-68 Diamond core 32 ~ 80 (dry type)	✓	✓✓✓	✓	
26mm series	HR2630 SDS-plus		2.4J	2.8 - 3.5	3.2-26 4-18 35-68 Diamond core 32 ~ 80 (dry type)	✓	✓✓✓	✓	
26mm series	HR2611FT SDS-plus		2.4J	2.8 - 3.0	3.2-26 4-18 35-68 Diamond core 32 ~ 80 (dry type)	✓	✓✓✓	✓	


			Impact energy according to EPTA05/2009: J	EPTA Weight (kg)	MATERIAL FOR DRILLING: Highly reinforced concrete	Concrete, granite, stone, brick	Metal/ wood	Working direction
28mm series	**DHR280** SDS-plus		2.8J	3.9 - 5.0	✓	✓✓✓	✓	
28mm series	**DHR282** SDS-plus		2.8J	3.9 - 4.9	✓	✓✓✓	✓	
28mm series	**HR001G HR003G** SDS-plus		2.8J	3.9 - 4.6	✓	✓✓✓	✓	
28mm series	**HR002G** SDS-plus		2.9J	4.1 - 4.6	✓	✓✓✓	✓	
28mm series	**HR2810** SDS-plus		2.9J	3.4 - 3.9	✓	✓✓✓	✓	
28mm series	**HR007G** SDS-plus		3.0J	3.8 - 4.8	✓	✓✓✓	✓	

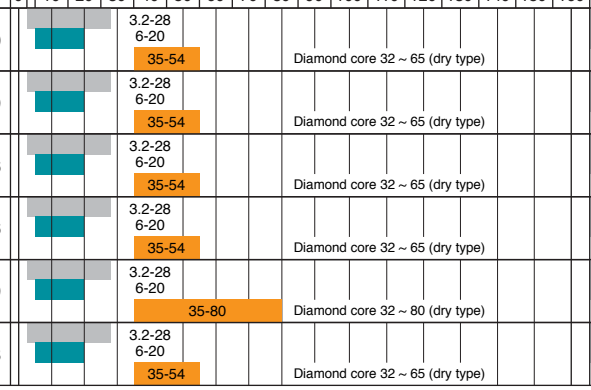


			Impact energy according to EPTA05/2009: J	EPTA Weight (kg)	MATERIAL FOR DRILLING: Highly reinforced concrete	Concrete, granite, stone, brick	Metal/ wood	Working direction
30mm series	**HR3001C** SDS-plus		3.9J	4.4 - 4.8	✓✓✓	✓✓✓	✓	
30mm series	**HR3011FC** SDS-plus		3.9J	4.1 - 4.5	✓✓✓	✓✓✓	✓	




			Impact energy according to EPTA05/2009: J	EPTA Weight (kg)	MATERIAL FOR DRILLING: Highly reinforced concrete	Concrete, granite, stone, brick	Metal/ wood	Working direction
32mm series	**HR3210C** SDS-plus		5.0J	4.8 - 5.6	✓✓✓	✓✓✓	✓	
32mm series	**HR3200C** SDS-plus		5.1J	4.8 - 5.6	✓✓✓	✓✓✓	✓	




			Impact energy according to EPTA05/2009: J	EPTA Weight (kg)	MATERIAL FOR DRILLING: Highly reinforced concrete	Concrete, granite, stone, brick	Metal/ wood	Working direction
35mm series	**HR3530** 17mm Hex		6.2J	5.8	✓✓✓	✓✓✓		




			Impact energy according to EPTA05/2009: J	EPTA Weight (kg)	MATERIAL FOR DRILLING: Highly reinforced concrete	Concrete, granite, stone, brick	Metal/ wood	Working direction
40mm series	**DHR400** SDS-max		8.0J	4.1 - 4.6	✓✓✓	✓✓✓		
40mm series	**HR005G** SDS-max		8.0J	4.1 - 4.6	✓✓✓	✓✓✓		
40mm series	**HR4013C** SDS-max		8.0J	6.2 - 6.9	✓✓✓	✓✓✓		
40mm series	**HR4003C** SDS-max		8.3J	6.2 - 6.9	✓✓✓	✓✓✓		
40mm series	**HR4001C** SDS-max		6.8J	6.3 - 6.7	✓✓✓	✓✓✓		
40mm series	**HR4002** SDS-max		6.1J	6.6 - 6.8	✓✓✓	✓✓✓		
40mm series	**HR4030C** 17mm Hex		9.2J	6.9	✓✓✓	✓✓✓		

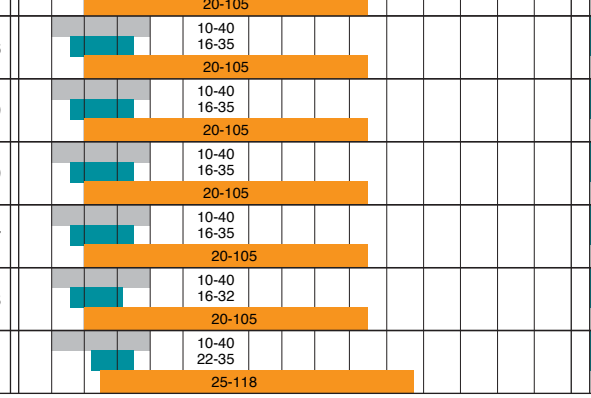

			Impact energy according to EPTA05/2009: J	EPTA Weight (kg)	MATERIAL FOR DRILLING: Highly reinforced concrete	Concrete, granite, stone, brick	Metal/ wood	Working direction
45mm series	**HR4511C** SDS-max		9.4J	8.9 - 9.1	✓✓✓	✓✓✓		
45mm series	**HR4501C** SDS-max		10.1J	8.9 - 9.1	✓✓✓	✓✓✓		

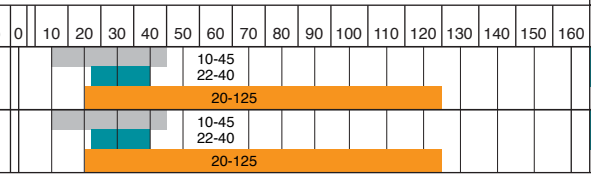

			Impact energy according to EPTA05/2009: J	EPTA Weight (kg)	MATERIAL FOR DRILLING: Highly reinforced concrete	Concrete, granite, stone, brick	Metal/ wood	Working direction
52mm series	**HR006G** SDS-max		21.4J	12.9 - 14.3	✓✓✓	✓✓✓		
52mm series	**HR5212C** SDS-max		20.0J	11 - 12	✓✓✓	✓✓✓		
52mm series	**HR5202C** SDS-max		19.1J	11 - 12	✓✓✓	✓✓✓		
52mm series	**HR5211C** SDS-max		18.9J	11.3 - 12.2	✓✓✓	✓✓✓		

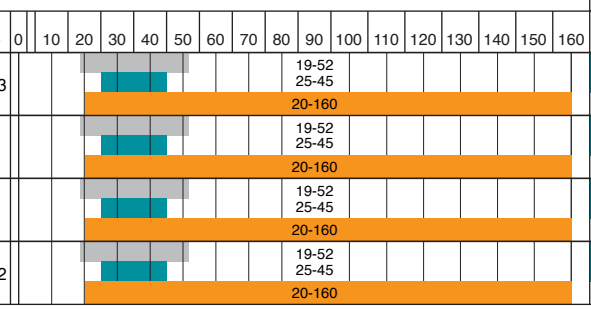



CUTTING
Pemotong 切割

CUTTING (New Material | Masonry | Metal)

4112HS 305mm (12")
204

Angle Cutter
Mesin Pemotong
切割机





- **Smooth and comfortable cutting**
  Pemotongan lancar dan selesa
  平滑切割

Standard Equipment: Socket Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,400W**
Capacity Kapasiti 能力	**Max cutting : 100mm (4")**
Blade Diameter Diameter Bilah 锯片直径	**305mm (12")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**5,000**
Overall Length Panjang Keseluruhan 总长度	**648mm (25-1/2")**
Net Weight Berat Bersih 净重	**10.4kg (22.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

4114S 355mm (14")
204

Angle Cutter
Mesin Pemotong
切割机





- **Faster cutting for increased productivity**
  Pemotongan cepat meningkatkan produktiviti
  更快的切割提高生产力

Standard Equipment: Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,400W**
Capacity Kapasiti 能力	**Max cutting : 125mm (5")**
Wheel Diameter Diameter Bilah 锯片直径	**355mm (14")**
Hole Diameter Diameter Lubang 孔直径	**25.4mm (1")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,500**
Dimensions (L x W x H) Dimensi 体积	**673x240x329mm (26-1/2"x9-1/2"x13")**
Net Weight Berat Bersih 净重	**10.8kg (23.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

SG1251J 125mm (5")
318

Wall Chaser
Mesin Pemotong Dinding
石材开槽切割机





- **Clean, compact and comfortable**
  Bersih, padat dan selesa
  干净，紧凑，舒适

Standard Equipment: Diamond Wheel x2, Hex Wrench, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,400W**
Capacity Kapasiti 能力	**Depth : 0-30mm (0 - 1-3/16")** **Width: 6-30mm (1/4 - 1-3/16")**
Blade Diameter Diameter Bilah 锯片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**10,000**
Dimensions (L x W x H) Dimensi 体积	**350x151x178mm (13-3/4"x5-15/16"x7")**
Net Weight Berat Bersih 净重	**4.3kg (9.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

4131 185mm (7-1/4")
303

Metal Cutter
Mesin Memotong Logam
金属切割机





- **Powerful 1,100W motor cuts through various types of metal**
  Motor berkuasa 1,100W sesuai untuk memotong pelbagai jenis logam
  强力1,100W马达可切割多种金属

Standard Equipment: Carbide-Tipped Saw Blade (B-04628), Hex Wrench, Safety Goggles

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,100W**
Blade Diameter Diameter Bilah 锯片直径	**185mm (7-1/4")**
Capacity Kapasiti 能力	**Max cutting : 63mm (2-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,500**
Overall Length Panjang Keseluruhan 总长度	**358mm (14-1/8")**
Net Weight Berat Bersih 净重	**4.8kg (11.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

CUTTING (New Material | Masonry)

4100NH 110mm (4-3/8")

303

Cutter
Mesin Pemotong
切割机





- **Powerful cutting in stone, masonry, tile & concrete**
  Berkuasa untuk memotong batu, masonri, jubin & konkrit
  有力的切割石材，砖石，瓷砖和混凝土

Standard Equipment: Wrench, Socket Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,300W**
Blade Diameter Diameter Bilah 锯片直径	**110mm (4-3/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 34mm (1-3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**14,500**
Dimensions (L x W x H) Dimensi 体积	**234x210x165mm (9-1/4"x8-1/4"x6-1/2")**
Net Weight Berat Bersih 淨重	**2.9kg (6.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

4100NH2Z 110mm (4-3/8")

303

Cutter
Mesin Pemotong
切割机





- **Bevel-cuts up to 45 degrees**
  Potongan serong hingga 45°
  45° 斜角切割

Standard Equipment: Wrench, Hex Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,400W**
Blade Diameter Diameter Bilah 锯片直径	**Max 125mm (Max 5")**
Max Cutting Capacity w/ 110mm (4-3/8") wheel Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 32.5mm (1-1/4")** **45°: 21.5mm (7/8")**
Max Cutting Capacity w/ 125mm (5") wheel Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 40.0mm (1-9/16")** **45°: 27.0mm (1-1/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**12,200**
Dimensions (L x W x H) Dimensi 体积	**238x214x169mm (9-3/8"x8-3/8"x6-5/8")**
Net Weight Berat Bersih 淨重	**3kg (6.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

4100NH3Z 110mm (4-3/8")

303

Cutter
Mesin Pemotong
切割机





- **Specialized for right angle cutting only**
  Khusus untuk pemotongan sudut kanan sahaja
  专为右斜角切割而设

Standard Equipment: Wrench, Hex Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,300W**
Blade Diameter Diameter Bilah 锯片直径	**110mm (4-3/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 32mm (1-1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**13,800**
Dimensions (L x W x H) Dimensi 体积	**227x209x166mm (8-15/16"x8-1/4"x6-1/2")**
Net Weight Berat Bersih 淨重	**2.8kg (6.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft.)**

4100KB 125mm (5")

303

Dustless Cutter
Mesin Pemotong
切割机





- **Powerful 1,400W motor, cutting in stone, masonry, tile, concrete & more**
  Motor berkuasa 1,400W, untuk memotong batu, masonri, jubin, konkrit dll
  强力1,400W马达适合切割石材，砖石，瓷砖，混凝土等

Standard Equipment: Diamond Wheel (D-38261), Dust Bag (1267380), Wrench, Hex Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,400W**
Blade Diameter Diameter Bilah 锯片直径	**125mm (5")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**40.0mm (1-9/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**12,200**
Dimensions (L x W x H) Dimensi 体积	**231x220x179mm (9-1/8"x8-5/8"x7")**
Net Weight Berat Bersih 淨重	**3.0kg (6.6lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

4107R 180mm (7-1/8")

153

Cutter
Mesin Pemotong
切割机





- **Ideal for stone materials (such as granite and marble), concrete and asphalt**
  Sesuai untuk bahan batu seperti granit, marma,konkrit dan asfalt bahan
  适用于石材如花岗岩，大理石，混凝土和沥青

Standard Equipment: Socket Wrench, Offset Wrench, Water plug & tube

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,400W**
Capacity Kapasiti 能力	**Max cutting : 60mm (2-3/8")**
Blade Diameter Diameter Bilah 锯片直径	**180mm (7-1/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**5,000**
Overall Length Panjang Keseluruhan 总长度	**370mm (14-9/16")**
Net Weight Berat Bersih 淨重	**6.3kg (14.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

CUTTING (New Material | Masonry | Metal)

LC1230 305mm (12")

203

Metal Cutting Saw
Mesin Memotong Logam
金属型材切割机



- **For Cutting in Pipe, Angle Iron, Conduit and More**
  Untuk pemotongan paip, sesiku besi, konduit dan banyak lagi
  用于切割管道，角铁，导管等

Standard Equipment: Carbide-Tipped Saw Blade, Socket Wrench, Safety Goggles



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,750W**
Blade Diameter Diameter Bilah 锯片直径	**305mm (12")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 115mm (4-1/2")** **90°: 75 x 150mm (2-15/16" x 5-7/8")** **45°: 90mm (3-1/2")** **45°: 85 x 85mm (3-5/16" x 3-5/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**1,300**
Dimensions (L x W x H) Dimensi 体积	**516x306x603mm** **(20-1/4"x12"x23-3/4")**
Net Weight Berat Bersih 淨重	**19.3kg (42.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

Why Makita Carbide-tipped Metal Cutting saw VS. Abrasive Cutting Saw



Carbide-Tipped Blades make Virtually Spark-Free Cuts



Abrasive Blades make Cuts with Sparks

Makita's Carbide-Tipped Metal Blades Cuts Cleaner


Tubing	Threaded Rod	UNISTRUT™	Angle Iron	Pipe
				
Makita Carbide- Tipped Blade Abrasive Blade	**Makita Carbide- Tipped Blade** Abrasive Blade	**Makita Carbide- Tipped Blade** Abrasive Blade	**Makita Carbide- Tipped Blade** Abrasive Blade	**Makita Carbide- Tipped Blade** Abrasive Blade

Carbide-Tipped Metal Blades for Many Applications



Applications

◎ **Excellent**
○ **Good**
△ **Fair**
✕ **Not Applicable**









Size (mm) / Tip thickness / Part No. / Nominal thickness	Angle 6mm	Angle 4mm	Tubing 3mm	Tubing 4.5mm	Channel 2.3mm	Channel 3.2mm	Round Pipe 3.8mm
305 x 60T (Mild steel) / 2.1mm / A-87242	○	○	○	△	✕	◎	◎
305 x 60T (Mild steel) / 2.5mm / A-81860	○	○	◎	○	✕	◎	◎
305 x 60T (Mild steel) lessend noise / 2.4mm / A-86723	◎	◎	◎	○	✕	◎	◎
305 x 78T (Thin steel) / 2.3mm / A-87127	△	△	△	✕	○	△	△
305 x 76T (Thin steel) / 1.95mm / A-87579	○	○	△	✕	◎	△	◎

CUTTING (New Material | Masonry | Metal)

Metal Cutting Process


Carbide-Tipped Metal Blade Cutting Tips

- Always wear safety glasses, gloves, protective equipment and follow instructions provided with power tool
- Do not apply excessive pressure on the handle when cutting as damage to the carbide-tips can be a result
- Too little or too much pressure on the handle may result in more sparks and premature blade wear
- Use block spacers when cutting square/rectangle tubing as well as channel and UNISTRUT™ for longer blade life
- When cutting long pieces of metal always use support blocks on both sides so the metal will be level with the saw base
- Do not touch blade or metal immediately after cut


Carbide-Tipped Metal Blade Cutting Tips

1. Ensure metal is properly placed on saw base and firmly secured in the saw
2. Hold the saw handle firmly and wait until full speed is obtained
3. Lower the handle gently to bring the blade close to the metal
4. Gently ease the blade into the metal and add minimal pressure (reduce pressure if sparks appear)
5. After completed cut, turn off power tool and wait until blade has come to a complete stop then raise the handle back (if handle is raised back with blade still rotating then the blade may be caught)


Metal Cutting Process

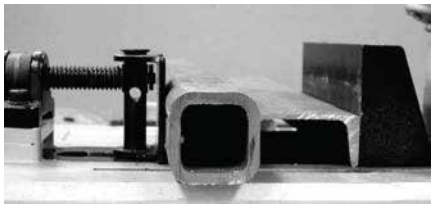


Square & Rectangle Tubing (use block spacer)

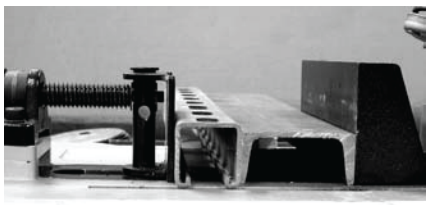


Channels & UNISTRUT™ (use block spacer)

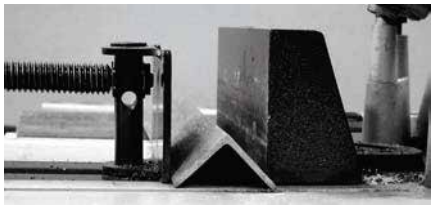

Angle

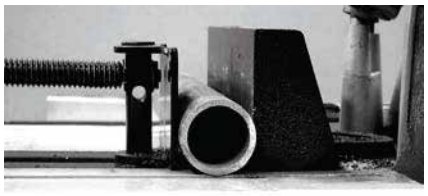


Round Pipe

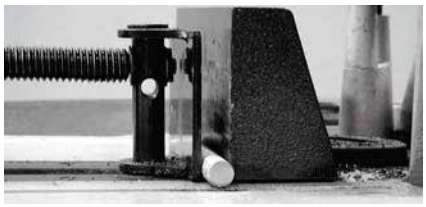

Threaded Rod

Block Spacer Reference Chart

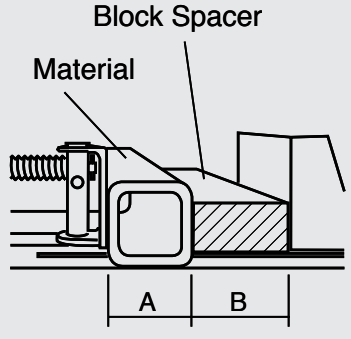Applications		Square & Rectangle Tubing				Round Pipe			Square & Rectangle Tubing		Round Pipe	
The height of material		Up to 75 mm		Up to 100 mm		—			Up to 85 mm		—	
		A	B	A	B	A	B		A	B	A	B
	90 Degree Cutting	25	125	25	75	25	90	45 Degree Cutting	25	60	25	65
		50	100	50	50	50	65		50	35	50	40
		75	75	75	25	75	40		75	10	75	15
		100	50	100	0	100	15		85	0	90	0
		125	25	—	—	115	0		—	—	—	—
		*150	0	—	—	—	—		—	—	—	—

*Hint: Block Spacer should be determined by subtracting the metal width from 150 mm.

CUTTING (Metal)





2107F

303

Portable Band Saw
Pemotong Ringan
带锯机





- **Built-in fluorescent job light for clear view**
  Lampu kerja fluoresen terbina dalam untuk penglihatan jelas
  内置荧光工作灯，确保清晰视野

ACCESSORIES (Optional)



Portable Band Saw Stand & Cover
Part No. 196326-7

Standard Equipment:
Band Saw Blade, Hex Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**710W**
Capacity Kapasiti 能力	**Round:120mm (4-3/4")** **Rectangular workpiece w/o stand: 120x120mm (4-3/4"x4-3/4")**
Blade Speed Kelajuan Bilah 刀片速度	**60m (200ft) - 105m (350ft)/ min**
Dimensions (L x W x H) Dimensi 体积	**508x188x256mm (20"x7-3/8"x10-1/8")**
Net Weight Berat Bersih 净重	**6.3kg (13.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

LW1400 355mm (14")

203

Portable Cut-off
Mesin Pemotong
型材切割机





- **Large spark guard prevents backward scattering of spark**
  Pengawal pencucuh menghalang hamburan mundur dari percikan api
  大的火花防护装置可防止火花向后散射

Standard Equipment: Abrasive Cut-Off Wheel

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,200W**
Wheel Diameter Diameter Bilah 锯片直径	**355mm (14")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,800**
Capacity at 45° Kapasiti 能力	**Round: 127mm (5")** **Rectangular: 115x103mm (4-1/2"x4-1/16")** **Square: 106x106 mm (4-3/16"x4-3/16")** **Triangular: 100x100x10mm (4"x4"x3/8")**
Dimensions (L x W x H) Dimensi 体积	**530x295x640mm (20-7/8"x11-5/8"x25-1/4")**
Net Weight Berat Bersih 净重	**18.7kg (41.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

LW1401 355mm (14")

203

Portable Cut-off
Mesin Pemotong
型材切割机





- **Powerful 2,200W motor**
  Motor berkuasa 2,200W
  强力2200W马达

Standard Equipment: Abrasive Cut-Off Wheel, Socket Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,200W**
Wheel Diameter Diameter Bilah 锯片直径	**355mm (14")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,800**
Capacity at 45° Kapasiti 能力	**Round: 127mm (5")** **Rectangular: 115x103mm (4-1/2"x4-1/16")** **Square: 106x106mm (4-3/16"x4-3/16")** **Triangular: 100x100x10mm (4"x4"x3/8")**
Dimensions (L x W x H) Dimensi 体积	**500x295x640mm (19-3/4"x11-5/8"x25-1/4")**
Net Weight Berat Bersih 净重	**18.3kg (40.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

CUTTING (Metal)

2416S 405mm (16")

153

Portable Cut-off
Mesin Pemotong
型材切割机







- **Mitres 45° Left And Right**
  Potongan miter 45° kiri dan kanan
  左右45° 斜切割


Standard Equipment: Abrasive Cut-Off Wheel, Socket Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	1,430W
Wheel Diameter Diameter Bilah 锯片直径	405mm (16")
Hole Diameter Diameter Lubang 孔直径	25.4mm (1")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	2,300
Dimensions (L x W x H) Dimensi 体积	610x265x535mm (24"x10-3/8"x21")
Net Weight Berat Bersih 淨重	19.2kg (42.3lbs)
Power Supply Cord Kabel Wayar 电源线	2.5m (8.2ft)









Model No. 型号	Cutting Angle Sudut Pemotongan 切割角度	Round Pipe Tiub Bulat 圆管	Rectangular Metal Logam Segi Empat Tepat 长方形金属	Square Metal Logam Segi Empat 方形金属	Angle Bar Besi Sudut 角铁
LC1230	90°	115mm	150 x 75mm	100mm	100mm
	45°	90mm	85 x 85mm	85mm	85mm
LW1400	90°	127mm	233 x 70mm	119mm	137mm
	45°	127mm	115 x 103mm	106mm	100mm
LW1401	90°	127mm	233 x 70mm	119mm	137mm
	45°	127mm	115 x 103mm	106mm	100mm
2416S	90°	115mm	230 x 80mm	120mm	150mm
	45°	115mm	110 x 110mm	110mm	110mm

JN1601 1.6mm (16Ga)

411

Nibbler
Pemotong Elektrik
电冲剪





- **2,200 SPM for faster and smooth cutting**
  2,200 SPM untuk pemotongan cepat dan lancar
  2200 SPM更快更顺畅地切割

Standard Equipment: Hex Wrench, Wrench, Punch, Die

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	550W
Capacity Kapasiti 能力	Steel up to 400 N/mm² : 1.6mm Steel up to 600 N/mm² : 1.2mm Steel up to 800 N/mm² : 0.8mm Aluminum up to 200 N/mm² : 2.5mm
Min. Cutting Radius Radius Pemotongan Minimum 最小切割半径	Outside edge : 50mm (2") Inside edge : 45mm (1-3/4")
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	2,200
Overall Length Panjang Keseluruhan 总长度	261mm (10-1/4")
Net Weight Berat Bersih 淨重	1.6kg (3.6lbs)
Power Supply Cord Kabel Wayar 电源线	2.0m (6.6ft)

JN3201 3.2mm (10Ga)

303

Nibbler
Pemotong Elektrik
电冲剪





- **Built-in thickness gauge for operator convenience**
  Penyukat ketebalan terbina dalam memudahkan pengguna
  内置测厚仪方便使用

Standard Equipment:
Punch, Die, Wrench 50, Hex Wrench, Washer

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	710W
Capacity Kapasiti 能力	Steel up to 400 N/mm² : 3.2mm Steel up to 600 N/mm² : 2.5mm Steel up to 800 N/mm² : 1.0mm Aluminum up to 200 N/mm² : 3.5mm
Min. Cutting Radius Radius Pemotongan Minimum 最小切割半径	Outside edge : 128mm (5-1/16") Inside edge : 120mm (4-3/4")
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	1,300
Dimensions (L x W x H) Dimensi 体积	225x90x254mm (8-7/8"x-1/2"x10")
Net Weight Berat Bersih 淨重	3.4kg (7.4lbs)
Power Supply Cord Kabel Wayar 电源线	2.5m (8.2ft)

CUTTING (Metal)

JS1601 1.6mm (16Ga)

459

Straight Metal Shear
Pemotong Elektrik
电剪刀



- **Fast Cutting Action in Steel and Aluminum**
  Pemotongan Cepat untuk Keluli dan Aluminium
  快速切割钢和铝



Standard Equipment: Hex Wrench, Thickness Gauge

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**380W**
Capacity Kapasiti 能力	**Steel up to 400N/mm² : 1.6mm** **Steel up to 600N/mm² : 1.2mm** **Steel up to 800N/mm² : 0.8mm** **Aluminum up to 200N/mm² : 2.5mm**
Min. Cutting Radius Radius Pemotongan Minimum 最小切割半径	**250mm (9-7/8")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**4,500**
Dimensions (L x W x H) Dimensi 体积	**320x70x78mm** **(12-5/8"x2-3/4"x3-1/16")**
Net Weight Berat Bersih 淨重	**1.4kg (3.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

JS1300 1.3mm

419

Straight Shear
Pemotong Elektrik
电剪刀



- **Shear head attachment rotates 360°**
  Kepala pemotong boleh berputar 360 °
  剪切头附件可旋转360°



Standard Equipment: Hex Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**570W**
Capacity Kapasiti 能力	**Steel up to 400N/mm² : 1.3mm** **Steel up to 600N/mm² : 1.0mm** **Steel up to 800N/mm² : 0.5mm** **Aluminum up to 200N/mm² : 2.5mm**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0-2,500**
Overall Length Panjang Keseluruhan 总长度	**302mm (11-7/8")**
Net Weight Berat Bersih 淨重	**1.8kg (3.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

JS1602 1.6mm (16Ga)

459

Metal Shear
Pemotong Elektrik
电剪刀



- **Fast and efficient cutting**
  Pemotongan cepat dan cekap
  快速高效的切割



Standard Equipment: Hex Wrench, Shear Blade Set

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**380W**
Capacity Kapasiti 能力	**Steel up to 400N/mm² : 1.6mm** **Steel up to 600N/mm² : 1.2mm** **Steel up to 800N/mm² : 0.8mm** **Aluminum up to 200N/mm² : 2.5mm**
Min. Cutting Radius Radius Pemotongan Minimum 最小切割半径	**30mm (1-3/16")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**4,000**
Dimensions (L x W x H) Dimensi 体积	**255x74x146mm** **(10"x2-15/16"x5-3/4")**
Net Weight Berat Bersih 淨重	**1.6kg (3.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

JS3201 3.2mm (10Ga)

303

Metal Shear
Pemotong Elektrik
电剪刀



- **Powerful 710W Motor**
  Motor berkuasa 710W
  强力710W马达



Standard Equipment: Shear Blade Set, Hex Wrench, Thickness Gauge

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**710W**
Capacity Kapasiti 能力	**Steel up to 400N/mm² : 3.2mm** **Steel up to 600N/mm² : 2.5mm** **Steel up to 800N/mm² : 1.5mm** **Aluminum up to 200N/mm² : 4.0mm**
Min. Cutting Radius Radius Pemotongan Minimum 最小切割半径	**50mm (2")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**1,600**
Dimensions (L x W x H) Dimensi 体积	**213x90x239mm** **(8-3/8"x3-1/2"x9-3/8")**
Net Weight Berat Bersih 淨重	**3.4kg (7.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

CA5000X 118mm (4-5/8")

303

Aluminum Groove Cutter
Mesin Memotong Aluminium
铝板开槽切割机



- **Cutter blade for 135 degrees V shaped groove as an option**
  Bilah pemotong alur 135° berbentuk V pemilihan
  可选135° V形槽的锯片



Standard Equipment: Cutter Blade, Plate, Hex Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,300W**
Blade Bilah 锯片	**Type: Cutter blade/ TCT saw blade**
Max Cutting Capacity w/ Cutter blade Kapasiti Pemotongan Maksimum 最大切割能力	**w/ Guide rail: 11mm (7/16")**
Max Cutting Capacity w/ TCT Saw blade Kapasiti Pemotongan Maksimum 最大切割能力	**w/ Guide rail: 36mm (1-7/16")** **w/o Guide rail: 41mm (1-5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,200-6,400**
Dimensions (L x W x H) Dimensi 体积	**346x250x250mm** **(13-5/8"x9-7/8"x9-7/8")**
Net Weight Berat Bersih 淨重	**4.7kg (10.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GRINDING SANDING

Pengisar | Pelicin 研削 | 研磨







9553HNG 100mm (4")

325

Angle Grinder
Pengisar Sudut
角向磨光机



Slide Switch
Suis Gelangsar 滑动开关



- **Spiral bevel gears for smoother rotations**
  Gear serong lingkaran untuk putaran yang licin
  螺旋锥齿轮更平滑的旋转

Standard Equipment: Depressed Center Wheel (A-80852), Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**710W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**258x118x97mm (10-1/8"x4-5/8"x3-13/16")**
Net Weight Berat Bersih 淨重	**1.5 - 1.8kg (3.2 - 4.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

9553HBG 100mm (4")

325

Angle Grinder
Pengisar Sudut
角向磨光机



Toggle Switch
Suis Togol 后置式开关



- **Compact design and lightweight**
  Reka bentuk padat dan ringan
  设计紧凑，轻量

Standard Equipment: Depressed Center Wheel (A-80852), Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**710W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**258x118x97mm (10-1/8"x4-5/8"x3-13/16")**
Net Weight Berat Bersih 淨重	**1.5 - 1.9kg (3.3 - 4.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

GA4030R 100mm (4")

459

Angle Grinder
Pengisar Sudut
角向磨光机



Slide Switch
Suis Gelangsar 滑动开关



- **Machined bevel gears provide up to 2x longer service life**
  Gear bevel machined memanjangkan hayat penggunaan 2x lebih lama
  加工锥齿轮延长了长达 2x 的使用寿命

Standard Equipment: Depressed Center Wheel (A-80852), Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**720W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**266x118x102mm (10-1/2"x4-5/8"x4")**
Net Weight Berat Bersih 淨重	**1.72 - 2.01kg (3.79 - 4.43lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GRINDING | SANDING

GA4030 100mm (4")

459

Angle Grinder
Pengisar Sudut
角向磨光机



Slide Switch
Suis Gelangsar 滑动开关



- **All ball bearing construction for durability and longer tool life**
  Struktur galas bola untuk memanjangkan hayat alat
  滚珠轴承结构延长工具寿命

Standard Equipment: Depressed Center Wheel (A-80852), Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**720W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**266x117x95mm (10-1/2"x4-5/8"x3-3/4")**
Net Weight Berat Bersih 淨重	**1.73 - 2.02kg (3.81 - 4.45lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA4031 100mm (4")

459

Angle Grinder
Pengisar Sudut
角向磨光机



Toggle Switch
Suis Togol 后置式开关



- **Toggle switch for easy operation**
  Suis togol untuk operasi lebih mudah
  后置式开关方便操作

Standard Equipment: Depressed Center Wheel (A-80852), Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**720W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**259x118x104mm (10-1/4"x4-5/8"x4-1/8")**
Net Weight Berat Bersih 淨重	**1.71 - 2.00kg (3.77 - 4.41lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA4034 100mm (4")

459

Angle Grinder
Pengisar Sudut
角向磨光机



Paddle Switch
Suis Pemicu 扳机开关



- **Machined bevel gears provide up to 2x longer service life**
  Gear bevel machined memanjangkan hayat penggunaan 2x lebih lama
  加工锥齿轮延长了长达 2x 的使用寿命

Standard Equipment: Depressed Center Wheel (A-80852), Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**720W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**265x118x95mm (10-3/8"x4-5/8"x3-3/4")**
Net Weight Berat Bersih 淨重	**1.77 - 2.06kg (3.90 - 4.54lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

9556HNG / HN / NB 100mm (4")

325

Angle Grinder
Pengisar Sudut
角向磨光机



Slide Switch
Suis Gelangsar 滑动开关



- **Powerful 840W motor**
  Motor berkuasa 840W
  强力840W马达

Standard Equipment: Depressed Center Wheel (A-80852), Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**840W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**271x118x97mm (10-5/8"x4-5/8"x3-13/16")**
Net Weight Berat Bersih 淨重	**1.6 - 2.0kg (3.6 - 4.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

9556HPG / PB 100mm (4")

325

Angle Grinder
Pengisar Sudut
角向磨光机



Paddle Switch
Suis Pemicu 扳机开关



- **Powerful 840W motor**
  Motor berkuasa 840W
  强力840W马达

Standard Equipment: Depressed Center Wheel (A-80852), Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**840W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**273x118x97mm (10-3/4"x4-5/8"x3-13/16")**
Net Weight Berat Bersih 淨重	**1.6 - 2.0kg (3.6 - 4.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

GRINDING | SANDING

GA4040 100mm (4")

325

Angle Grinder
Pengisar Sudut
角向磨光机



Slide Switch
Suis Gelangsar 滑动开关



- **Spiral bevel gears for smoother rotations and a more efficient transfer of energy**
  gear serong lingkaran untuk pemindahan tenaga yang lebih cekap
  螺旋锥齿轮高效输送能源

Standard Equipment: Depressed Center Wheel (A-80852), Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,100W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**303x117x111mm (11-7/8"x4-5/8"x4-3/8")**
Net Weight Berat Bersih 淨重	**2.2 - 2.5kg (4.9 - 5.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA4051R 100mm (4")

260

Angle Grinder
Pengisar Sudut
角向磨光机



Paddle Switch
Suis Pemicu 扳机开关



- **Powerful 1,300W motor delivers 11,000RPM for high output power**

Standard Equipment: Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,300W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
Wheel Hole Diameter Diameter Lubang Roda 轮片孔直径	**16mm (5/8")**
Max Wheel Thickness Ketebalan Roda Maksimum 最大轮片厚度	**6.4mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**325x117x100mm (12-3/4x4-5/8x4-5/16")**
Net Weight Berat Bersih 淨重	**2.3 - 2.5kg (5.1 - 5.5lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA4041C 100mm (4")

318

Angle Grinder
Pengisar Sudut
角向磨光机



Slide Switch
Suis Gelangsar 滑动开关



- **Super Joint System II developed for effective vibration absorption**
  SJS generasi kedua berkesan untuk menyerap getaran
  第二代 SJS 有效抑止震动

Standard Equipment: Depressed Center Wheel (A-80852), Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,400W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,800-11,000**
Dimensions (L x W x H) Dimensi 体积	**325x117x117mm (12-3/4"x4-5/8"x4-5/8")**
Net Weight Berat Bersih 淨重	**2.5 - 2.8kg (5.6 - 6.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA4040C 100mm (4")

318

Angle Grinder
Pengisar Sudut
角向磨光机



Slide Switch
Suis Gelangsar 滑动开关



- **Super Joint System II developed for effective vibration absorption**
  SJS generasi kedua berkesan untuk menyerap getaran
  第二代 SJS 有效抑止震动

Standard Equipment: Depressed Center Wheel (A-80852), Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,400W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,800-11,000**
Dimensions (L x W x H) Dimensi 体积	**303x117x111mm (11-7/8"x4-5/8"x4-3/8")**
Net Weight Berat Bersih 淨重	**2.3 - 2.6kg (5.1 - 5.7lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

9563C 100mm (4")

318

Angle Grinder
Pengisar Sudut
角向磨光机



Slide Switch
Suis Gelangsar 滑动开关



- **High power anti-dust motor**
  Motor tahan debu tinggi
  大功率防尘马达

Standard Equipment: Depressed Center Wheel (D-18443), Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,400W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**12,000**
Overall Length Dimensi 体积	**299mm (11-3/4")**
Net Weight Berat Bersih 淨重	**2.1kg (4.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GRINDING | SANDING

WHEEL DIAMETER
Diameter Roda | 轮片直径
4-1/2"
(115mm)



GA4530 115mm (4-1/2") — 459

Angle Grinder
Pengisar Sudut
角向磨光机



Slide Switch
Suis Gelangsar 滑动开关



- **Small diameter barrel grip for added comfort**
  Genggaman barel diameter kecil meningkatkan keselesaan
  小直径桶形手柄，增加手握舒适度

Standard Equipment: Depressed Center Wheel (A-80640), Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**720W**
Wheel Diameter Diameter Roda 轮片直径	**115mm (4-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**266x128x103mm (10-1/2"x5"x4-1/16")**
Net Weight Berat Bersih 淨重	**1.89 - 2.23kg (4.17 - 4.91lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA4530R 115mm (4-1/2") — 459

Angle Grinder
Pengisar Sudut
角向磨光机



Slide Switch
Suis Gelangsar 滑动开关



- **Anti-restart function prevents accidental start-up**
  Fungsi anti-restart menghalang penghidupan yang tidak disengajakan
  防重启功能可防止意外启动

Standard Equipment: Depressed Center Wheel (A-80640), Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**720W**
Wheel Diameter Diameter Roda 轮片直径	**115mm (4-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**266x130x108mm (10-1/2"x5-1/2"x4-1/4")**
Net Weight Berat Bersih 淨重	**1.88 - 2.22kg (4.14 - 4.89lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

9557HNG / NBG 115mm (4-1/2") — 325

Angle Grinder
Pengisar Sudut
角向磨光机



Slide Switch
Suis Gelangsar 滑动开关



- **Powerful 840W motor**
  Motor berkuasa 840W
  强力840W马达

Standard Equipment: Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**840W**
Wheel Diameter Diameter Roda 轮片直径	**115mm (4-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**271x129x106mm (10-5/8"x5-1/8"x4-3/16")**
Net Weight Berat Bersih 淨重	**1.7 - 2.2kg (3.8 - 4.8lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

9557HPG 115mm (4-1/2") — 325

Angle Grinder
Pengisar Sudut
角向磨光机



Paddle Switch
Suis Pemicu 扳机开关



- **Large Flush-Mount Paddle Switch for Comfortable Operation**
  Suis Flush-mount mudah digunakan
  大型平装式扳钮开关易于操作

Standard Equipment: Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**840W**
Wheel Diameter Diameter Roda 轮片直径	**115mm (4-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**273x129x106mm (10-3/4"x5-1/8"x4-3/16")**
Net Weight Berat Bersih 淨重	**1.8 - 2.2kg (3.9 - 4.8lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GRINDING | SANDING

GA4540R 115mm (4-1/2") 325

Angle Grinder
Pengisar Sudut
角向磨光机



Slide Switch
Suis Gelangsar 滑动开关



- **Super Joint System II developed for effective vibration absorption**
  SJS generasi kedua berkesan untuk menyerap getaran
  第二代 SJS 有效抑止震动

Standard Equipment: Depressed Center Wheel (A-80640), Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,100W**
Wheel Diameter Diameter Roda 轮片直径	**115mm (4-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**303x130x116mm (11-7/8"x5-1/8"x4-9/16")**
Net Weight Berat Bersih 淨重	**2.4 - 2.8kg (5.4 - 6.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA4540 115mm (4-1/2") 325

Angle Grinder
Pengisar Sudut
角向磨光机



Slide Switch
Suis Gelangsar 滑动开关



- **Super Joint System II developed for effective vibration absorption**
  SJS generasi kedua berkesan untuk menyerap getaran
  第二代 SJS 有效抑止震动

Standard Equipment: Depressed Center Wheel (A-80640), Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,100W**
Wheel Diameter Diameter Roda 轮片直径	**115mm (4-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**303x130x116mm (11-7/8"x5-1/8"x4-9/16")**
Net Weight Berat Bersih 淨重	**2.3 - 2.7kg (5.2 - 5.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA4541C 115mm (4-1/2") 318

Angle Grinder
Pengisar Sudut
角向磨光机



Slide Switch
Suis Gelangsar 滑动开关



- **Super Joint System II developed for effective vibration absorption**
  SJS generasi kedua berkesan untuk menyerap getaran
  第二代 SJS 有效抑止震动

Standard Equipment: Depressed Center Wheel (D-18459), Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,400W**
Wheel Diameter Diameter Roda 轮片直径	**115mm (4-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,800-11,000**
Dimensions (L x W x H) Dimensi 体积	**325x130x121mm (12-3/4"x5-1/8"x4-3/4")**
Net Weight Berat Bersih 淨重	**2.7 - 3.0kg (5.9 - 6.7lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

WHEEL DIAMETER
Diameter Roda | 轮片直径
5"
(125mm)



GA5030 125mm (5") 459

Angle Grinder
Pengisar Sudut
角向磨光机



Slide Switch
Suis Gelangsar 滑动开关



- **Machined bevel gears provide up to 2x longer service life**
  Gear bevel machined memanjangkan hayat penggunaan 2x lebih lama
  加工锥齿轮延长了长达 2x 的使用寿命

Standard Equipment: Depressed Center Wheel (A-80656), Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**720W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**266x138x103mm (10-1/2"x5-7/16"x4-1/16")**
Net Weight Berat Bersih 淨重	**1.92 - 3.07kg (4.23 - 6.77lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GRINDING | SANDING

GA5030R 125mm (5")

459

Angle Grinder
Pengisar Sudut
角向磨光机



Slide Switch
Suis Gelangsar 滑动开关



- **Anti-restart function prevents accidental start-up**
  Fungsi anti-restart menghalang penghidupan yang tidak disengajakan
  防重启功能可防止意外启动

Standard Equipment: Depressed Center Wheel (A-80656), Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**720W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**266x140x108mm (10-1/2"x5-1/2"x4-1/4")**
Net Weight Berat Bersih 淨重	**1.91 - 3.06kg (4.21 - 6.75lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA5034 125mm (5")

459

Angle Grinder
Pengisar Sudut
角向磨光机



Paddle Switch
Suis Pemicu 扳机开关



- **Small Diameter Barrel Grip**
  Genggaman Barel Diameter Kecil
  小直径桶握

Standard Equipment: Depressed Center Wheel (A-80656), Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**720W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**265x139x103mm (10-3/8"x5-1/2"x4-1/16")**
Net Weight Berat Bersih 淨重	**2.00 - 3.15kg (4.41 - 6.94lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

9558HNG / NBG 125mm (5")

325

Angle Grinder
Pengisar Sudut
角向磨光机



Slide Switch
Suis Gelangsar 滑动开关



- **Slide switch with lock-on for continuous use**
  Suis gelangsar dengan fungsi mengunci untuk kegunaan berterusan
  备有锁定功能的滑动按钮可连续无间断的使用

Standard Equipment: Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**840W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**271x139x106mm (10-5/8"x5-1/2"x4-3/16")**
Net Weight Berat Bersih 淨重	**1.7 - 3.2kg (3.8 - 6.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

9558HPG 125mm (5")

325

Angle Grinder
Pengisar Sudut
角向磨光机



Paddle Switch
Suis Pemicu 扳机开关



- **Large Flush-Mount Paddle Switch for Comfortable Operation**
  Suis Flush-mount mudah digunakan
  大型平装式扳钮开关易于操作

Standard Equipment: Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**840W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**273x139x106mm (10-3/4"x5-1/2"x4-3/16")**
Net Weight Berat Bersih 淨重	**1.8 - 3.0kg (3.9 - 6.7lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA5020 125mm (5")

303

Angle Grinder
Pengisar Sudut
角向磨光机



Trigger Switch
Suis Pemicu 扳机开关



- **SJS Mechanical Clutch System Helps Prevent Motor and Gear Damage**
  Sistem SJS mencegah kerosakan pada motor dan gear
  SJS 系统有助于防止马达和齿轮损坏

Standard Equipment: Depressed Center Wheel (A-80656), Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,050W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**12,000**
Dimensions (L x W x H) Dimensi 体积	**356x139x120mm (14"x5-1/2"x4-3/4")**
Net Weight Berat Bersih 淨重	**2.7 - 3.9kg (6.0 - 8.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GRINDING | SANDING

GA5010 125mm (5")

303

Angle Grinder
Pengisar Sudut
角向磨光机



Trigger Switch
Suis Pemicu 扳机开关



- **Powerful 1,050W motor**
  Motor berkuasa 1,050W
  强力1,050W马达

Standard Equipment: Depressed Center Wheel (A-80656), Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,050W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**12,000**
Dimensions (L x W x H) Dimensi 体积	**356x139x112mm (14"x5-1/2"x4-3/8")**
Net Weight Berat Bersih 淨重	**2.6 - 3.8kg (5.8 - 8.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA5040 125mm (5")

325

Angle Grinder
Pengisar Sudut
角向磨光机



Slide Switch
Suis Gelangsar 滑动开关



- **Connectable to Makita vacuum cleaner with optional dust collecting wheel guard**
  Boleh bersambung dengan pembersih vakum Makita dengan alat pilihan pengumpul debu
  可选附件轮状集尘护罩以连接 Makita 吸尘器

Standard Equipment: Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,100W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**303x140x116mm (11-7/8"x5-1/2"x4-9/16")**
Net Weight Berat Bersih 淨重	**2.4 - 3.5kg (5.2 - 7.8lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA5080R 125mm (5")

318

Angle Grinder
Pengisar Sudut
角向磨光机



Slide Switch
Suis Gelangsar 滑动开关



- **X-LOCK for toolless accessory changes**
  X-LOCK untuk perubahan aksesori tanpa alat
  免工具更换配件的 X-LOCK

Standard Equipment: Depressed Center Wheel (E-00402), Side Grip, Wheel Cover

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,400W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
Max Wheel Thickness Ketebalan Roda Maksimum 最大轮片厚度	**6mm (1/4")**
Max Cutting Depth Kedalaman Pemotongan Maksimum 最大切割深度	**31mm (1-1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**12,000**
Dimensions (L x W x H) Dimensi 体积	**309x141x113mm (12-1/8x5-9/16x4-7/16")**
Net Weight Berat Bersih 淨重	**2.5 - 3.6kg (5.5 - 7.9lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA5041C 125mm (5")

318

Angle Grinder
Pengisar Sudut
角向磨光机



Slide Switch
Suis Gelangsar 滑动开关



- **Super Joint System II developed for effective vibration absorption**
  SJS generasi kedua berkesan untuk menyerap getaran
  第二代 SJS 有效抑止震动

Standard Equipment: Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,400W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,800-11,000**
Dimensions (L x W x H) Dimensi 体积	**325x140x121mm (12-3/4"x5-1/2"x4-3/4")**
Net Weight Berat Bersih 淨重	**2.7 - 3.8kg (5.9 - 8.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

9565CR / PC 125mm (5")

318

Angle Grinder
Pengisar Sudut
角向磨光机





9565CR
Slide Switch
Suis Gelangsar 滑动开关



9565PC
Paddle Switch
Suis Pemicu 扳机开关

- **SJS Mechanical Clutch System Helps Prevent Motor and Gear Damage**
  Sistem SJS mencegah kerosakan pada motor dan gear
  SJS 系统有助于防止马达和齿轮损坏

Standard Equipment:
9565CR: Depressed Center Wheel (B-56390), Side Grip, Wheel Cover, Lock Nut Wrench
9565PC: Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,400W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**12,000**
Dimensions (L x W x H) Dimensi 体积	**299x139x103mm 9565CR (11-3/4"x5-1/2"x4-1/16")** **307x139x103mm 9565PC (12-1/8"x5-1/2"x4")**
Net Weight Berat Bersih 淨重	**2.4 - 3.5kg (5.2 - 7.7lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**



Recommended Accessories
Grinding Wheel for Heavy Industries
Depressed Center Wheel (B-56390)
125 x 7.2mm

GRINDING | SANDING



GA6010 150mm (6") 303

Angle Grinder
Pengisar Sudut
角向磨光机



Trigger Switch
Suis Pemicu 扳机开关



- **Powerful 1,050W motor**
  Motor berkuasa 1,050W
  强力1,050W马达

Standard Equipment: Depressed Center Wheel (A-80846), Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,050W**
Wheel Diameter Diameter Roda 轮片直径	**150mm (6")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**10,000**
Dimensions (L x W x H) Dimensi 体积	**356x169x112mm (14"x6-5/8"x4-3/8")**
Net Weight Berat Bersih 净重	**2.7 - 3.1kg (5.9 - 6.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA6040 150mm (6") 325

Angle Grinder
Pengisar Sudut
角向磨光机



Slide Switch
Suis Gelangsar 滑动开关



Sementara stok masih ada 售完即止
WHILE STOCK LAST

- **Super Joint System II developed for effective vibration absorption**
  SJS generasi kedua berkesan untuk menyerap getaran
  第二代 SJS 有效抑止震动

Standard Equipment: Depressed Center Wheel (A-80846), Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,100W**
Wheel Diameter Diameter Roda 轮片直径	**150mm (6")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**9,000**
Dimensions (L x W x H) Dimensi 体积	**303x171x116mm (11-7/8"x6-3/4"x4-9/16")**
Net Weight Berat Bersih 净重	**2.4 - 2.8kg (5.3 - 6.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA6020C 150mm (6") 253

Angle Grinder
Pengisar Sudut
角向磨光机



Trigger Switch
Suis Pemicu 扳机开关



- **Electric current limiter protects motor from overload**
  Pembatasan arus elektrik melindungi motor dari kelebihan beban
  电流限制器保护马达免超负荷

Standard Equipment: Depressed Center Wheel (A-80846), Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,450W**
Wheel Diameter Diameter Roda 轮片直径	**150mm (6")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**9,000**
Dimensions (L x W x H) Dimensi 体积	**390x169x120mm (15-3/8"x6-5/8"x4-3/4")**
Net Weight Berat Bersih 净重	**3.0 - 3.5kg (6.7 - 7.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**



GRINDING | SANDING

GA7050 180mm (7")

204

Angle Grinder
Pengisar Sudut
角向磨光机



Trigger Switch
Suis Pemicu 扳机开关



- **Most compact in its class**
  Paling padat dalam kelasnya
  在同类中最紧凑

Standard Equipment: Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,000W**
Wheel Diameter Diameter Roda 轮片直径	**180mm (7")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Dimensi 体积	**432x200x132mm (17"x7-7/8"x5-3/16")**
Net Weight Berat Bersih 淨重	**3.98 - 5.00kg (8.8 - 11.0lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA7063R 180mm (7")

218

Angle Grinder
Pengisar Sudut
角向磨光机

Trigger Switch
Suis Pemicu 扳机开关



- **D-Handle protects operator's hand from materials**
  Pemegang D melindungi tangan pengguna dari bahan
  D型把手保护使用者的手远离物料

Standard Equipment: Side Grip, Wheel Cover, Lock Nut Wrench

Continuous rating input Panjang Strok 冲程长度	**2,200W**
Wheel Diameter Kelajuan Strok 冲程速度	**180mm (7")**
No Load Speed (RPM) Kapasiti 能力	**8,500**
Dimensions (L x W x H) Dimensi 体积	**450x200x145mm (17-3/4"x7-7/8"x5-3/4")**
Net weight Berat Bersih 淨重	**5.70 - 6.21kg (12.6 - 13.7lbs)**
Power supply cord	**2.5m (8.2ft.)**

GA7062 180mm (7")

218

Angle Grinder
Pengisar Sudut
角向磨光机

Trigger Switch
Suis Pemicu 扳机开关



- **Developed for heavy duty applications such as foundry grinding**
  Sesuai untuk aplikasi tugas berat
  适合重型应用，如铸造磨削加工

Standard Equipment: Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,200W**
Wheel Diameter Diameter Roda 轮片直径	**180mm (7")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Dimensi 体积	**450x200x144mm (17-3/4"x7-7/8"x5-5/8")**
Net Weight Berat Bersih 淨重	**5.51 - 6.02kg (12.2 - 13.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

GA7061R 180mm (7")

218

Angle Grinder
Pengisar Sudut
角向磨光机



Trigger Switch
Suis Pemicu 扳机开关



- **Developed for heavy duty applications such as foundry grinding**
  Ringan untuk mengurangkan keletihan, meningkatkan produksi dengan berkesan
  轻量不易引起疲劳，有效的增加工作量

Standard Equipment: Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,200W**
Wheel Diameter Diameter Roda 轮片直径	**180mm (7")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Dimensi 体积	**450x200x145mm (17-3/4"x7-7/8"x5-3/4")**
Net Weight Berat Bersih 淨重	**5.57 - 6.08kg (12.3 - 13.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA7060R 180mm (7")

218

Angle Grinder
Pengisar Sudut
角向磨光机



Trigger Switch
Suis Pemicu 扳机开关



- **Developed for heavy duty applications such as foundry grinding**
  Sesuai untuk aplikasi tugas berat
  适合重型应用，如铸造磨削加工

Standard Equipment: Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,200W**
Wheel Diameter Diameter Roda 轮片直径	**180mm (7")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Dimensi 体积	**450x200x144mm (17-3/4"x7-7/8"x5-5/8")**
Net Weight Berat Bersih 淨重	**5.42 - 5.93kg (12 - 13.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GRINDING | SANDING

GA7060 180mm (7")

218

Angle Grinder
Pengisar Sudut
角向磨光机



Trigger Switch
Suis Pemicu 扳机开关



- **Motor more durable for heavy duty applications**
  Motor lebih tahan lama untuk aplikasi tugas berat
  马达更耐用

Standard Equipment: Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,200W**
Wheel Diameter Diameter Roda 轮片直径	**180mm (7")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Dimensi 体积	**450x200x144mm (17-3/4"x7-7/8"x5-5/8")**
Net Weight Berat Bersih 淨重	**5.38 - 5.89kg (11.9 - 13lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA7020 180mm (7")

204

Angle Grinder
Pengisar Sudut
角向磨光机



Trigger Switch
Suis Pemicu 扳机开关



- **Powerful 2,200W Motor for Faster Material Removal**
  Motor berkuasa 2,200W untuk pengisaran yang lebih cepat
  功率强大的 2,200W 马达提供更快的研磨

Standard Equipment: Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,200W**
Wheel Diameter Diameter Roda 轮片直径	**180mm (7")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Dimensi 体积	**473x200x140mm (18-5/8"x7-7/8"x5-1/2")**
Net Weight Berat Bersih 淨重	**5.56 - 6.06kg (12.26 - 13.36lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA7040R 180mm (7")

204

Angle Grinder
Pengisar Sudut
角向磨光机



Trigger Switch
Suis Pemicu 扳机开关



Sementara stok masih ada 售完即止
WHILE STOCK LAST

- **Superior heavy duty motor with outstanding durability**
  Motor tugas berat unggul dengan ketahanan yang luar biasa
  耐用性卓越的马达

Standard Equipment: Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,600W**
Wheel Diameter Diameter Roda 轮片直径	**180mm (7")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Dimensi 体积	**503x200x140mm (19-3/4"x7-7/8"x5-1/2")**
Net Weight Berat Bersih 淨重	**6.48 - 6.98kg (14.3 - 15.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA7070 180mm (7")

Angle Grinder
Pengisar Sudut
角向磨光机



Trigger Switch
Suis Pemicu 扳机开关



NEW BARU 新

- **Motor more durable for heavy duty applications**

Standard Equipment: Anti-Vibration Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,800W**
Wheel Diameter Diameter Roda 轮片直径	**180mm (7")**
Wheel Hole Diameter Diameter Lubang Roda 轮片孔直径	**22.23mm (7/8")**
Max Wheel Thickness Ketebalan Roda Maksimum 最大轮片厚度	**7.2mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Dimensi 体积	**506x200x146mm (20x7-7/8x5-3/4")**
Net Weight Berat Bersih 淨重	**6.1 - 6.6kg (13.5 - 14.6lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

WHEEL DIAMETER
Diameter Roda | 轮片直径
9"
(230mm)



GRINDING | SANDING

GA9050 230mm (9")

204

Angle Grinder
Pengisar Sudut
角向磨光机



Trigger Switch
Suis Pemicu 扳机开关



- **Compact gear housing increases maximum cutting depth by 4mm**
  Kotak gear padat untuk meningkatkan kedalaman pemotongan maksimum kepada 4mm
  紧凑的齿轮箱增加最大切割深度至4mm

Standard Equipment: Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,000W**
Wheel Diameter Diameter Roda 轮片直径	**230mm (9")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**6,600**
Dimensions (L x W x H) Dimensi 体积	**432x250x132mm (17"x9-7/8"x5-3/16")**
Net Weight Berat Bersih 淨重	**4.64 - 6.94kg (10.2 - 15.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA9061R 230mm (9")

218

Angle Grinder
Pengisar Sudut
角向磨光机



Trigger Switch
Suis Pemicu 扳机开关



- **Motor more durable for heavy duty applications**
  Motor lebih tahan lama untuk aplikasi tugas berat
  马达更耐用

Standard Equipment: Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,200W**
Wheel Diameter Diameter Roda 轮片直径	**230mm (9")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**6,600**
Dimensions (L x W x H) Dimensi 体积	**450x250x145mm (17-3/4"x9-7/8"x5-3/4")**
Net Weight Berat Bersih 淨重	**5.68 - 8.04kg (12.5 - 17.7lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA9060R 230mm (9")

218

Angle Grinder
Pengisar Sudut
角向磨光机



Trigger Switch
Suis Pemicu 扳机开关



- **Powerful 2,200W motor**
  Motor berkuasa 2,200W
  强力2,200W马达

Standard Equipment: Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,200W**
Wheel Diameter Diameter Roda 轮片直径	**230mm (9")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**6,600**
Dimensions (L x W x H) Dimensi 体积	**450x250x144mm (17-3/4"x9-7/8"x5-5/8")**
Net Weight Berat Bersih 淨重	**5.52 - 7.88kg (12.8 - 17.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA9060 230mm (9")

218

Angle Grinder
Pengisar Sudut
角向磨光机



Trigger Switch
Suis Pemicu 扳机开关



- **Motor more durable for heavy duty applications**
  Motor lebih tahan lama untuk aplikasi tugas berat
  马达更耐用

Standard Equipment: Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,200W**
Wheel Diameter Diameter Roda 轮片直径	**230mm (9")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**6,600**
Dimensions (L x W x H) Dimensi 体积	**450x250x144mm (17-3/4"x9-7/8"x5-5/8")**
Net Weight Berat Bersih 淨重	**5.50 - 7.86kg (12.1 - 17.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA9020 230mm (9")

204

Angle Grinder
Pengisar Sudut
角向磨光机



Trigger Switch
Suis Pemicu 扳机开关



- **Spiral bevel gears more efficient transfer of energy**
  Gear serong lingkaran untuk pemindahan tenaga yang lebih cekap
  螺旋锥齿轮高效输送能源

Standard Equipment: Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,200W**
Wheel Diameter Diameter Roda 轮片直径	**230mm (9")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**6,000**
Dimensions (L x W x H) Dimensi 体积	**473x249x140mm (18-5/8"x9-3/4"x5-1/2")**
Net Weight Berat Bersih 淨重	**5.76 - 8.05kg (12.7 - 17.8lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GRINDING | SANDING

GA9070 230mm (9")

Angle Grinder
Pengisar Sudut
角向磨光机



Trigger Switch
Suis Pemicu 扳机开关



NEW BARU 新

- **Motor more durable for heavy duty applications**

Standard Equipment: Anti-Vibration Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,800W**
Wheel Diameter Diameter Roda 轮片直径	**230mm (9")**
Wheel Hole Diameter Diameter Lubang Roda 轮片孔直径	**22.23mm (7/8")**
Max Wheel Thickness Ketebalan Roda Maksimum 最大轮片厚度	**6.5mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**6,600**
Dimensions (L x W x H) Dimensi 体积	**506x250x146mm (20x9-7/8x5-3/4")**
Net Weight Berat Bersih 淨重	**6.3 - 8.5kg (13.9 - 18.7lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**





SA5040C 125mm (5") 318

Angle Sander
Pengampelas Sudut
角向抛光机





- **Electronic current limiter prevents motor burnout due to overloading**
  Pengehad arus electronik mencegah motor dari terbakar yang disebabkan oleh beban lampau
  电子电流限制器可防止超负荷引起的马达烧毁

Standard Equipment: Pad, Side Grip, Head Cover

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,400W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
Capacity Kapasiti 能力	**Pad : 115mm (4-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,000-7,800**
Dimensions (L x W x H) Dimensi 体积	**315x115x121mm (12-3/8"x4-1/2"x4-3/4")**
Net Weight Berat Bersih 淨重	**2.5 - 3.7kg (5.5 - 8.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

PK5001C 125mm (5") 318

Angle Sander
Pengampelas Sudut
角向抛光机





- **Ideal one for effective stone polishing**
  Untuk penggilap batu yang berkesan
  有效的石材抛光

Standard Equipment: Side Grip, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,400W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
Capacity Kapasiti 能力	**Pad : 115mm (4-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,000-6,800**
Dimensions (L x W x H) Dimensi 体积	**328x80x126mm (12-7/8"x3-1/8"x5")**
Net Weight Berat Bersih 淨重	**2.4 - 2.9kg (5.3 - 6.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**4.0m (13.1ft)**

GRINDING | SANDING

GV5010 125mm (5")

64

Disc Sander
Pelicin Piring
盘式砂光机



- **For faster and easier removal of paint/ rust**
  Untuk penyingkiran cat / karat yang lebih cepat dan mudah
  更快，更容易去除油漆/锈蚀



Standard Equipment: Abrasive Disc, Plastic Pad, Side Grip, Hex socket head bolt, Washer, Hex Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**440W**
Abrasive Disc Size Saiz Cakera 磨盘尺寸	**125mm (5")**
Capacity Kapasiti 能力	**Pad: 120mm (4-3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**4,500**
Dimensions (L x W x H) Dimensi 体积	**200x74x181mm (7-7/8"x2-15/16"x7-1/8")**
Net Weight Berat Bersih 淨重	**1.2kg (2.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GV6010 150mm (6")

64

Disc Sander
Pelicin Piring
盘式砂光机



- **Powerful 440W motor for fast material removal**
  Motor berkuasa 440W untuk penyingkiran bahan cepat
  功率强劲的440W马达



Standard Equipment: Abrasive Disc, Plastic Pad, Side Grip, Hex socket head bolt, Washer, Hex Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**440W**
Abrasive Disc Size Saiz Cakera 磨盘尺寸	**150mm (6")**
Capacity Kapasiti 能力	**Pad: 120mm (4-3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**4,500**
Dimensions (L x W x H) Dimensi 体积	**200x74x181mm (7-7/8"x2-15/16"x7-1/8")**
Net Weight Berat Bersih 淨重	**1.2kg (2.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GV7000C 180mm (7")

303

Disc Sander
Pelicin Piring
盘式砂光机



- **Motor-over-pad design for better balance and control**
  Reka bentuk motor-over-pad untuk keseimbangan dan kawalan yang lebih baik
  更好的平衡易于控制



Standard Equipment: Abrasive Disc, Rubber Pad, Lock Nut Wrench, Wrench, Side Grip

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**900W**
Abrasive Disc Size Saiz Cakera 磨盘尺寸	**180mm (7")**
Capacity Kapasiti 能力	**Pad: 180mm (7")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,500-4,700**
Overall Length Panjang Keseluruhan 总长度	**210mm (8-1/4")**
Net Weight Berat Bersih 淨重	**2.1kg (4.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

9215SB 150mm (6")

100

Disc Sander
Pelicin Piring
盘式砂光机



- **Powerful motor in well-balanced body for fast and steady sanding**
  Motor berkuasa dengan badan yang seimbang
  强劲的马达平衡良好及机身



Standard Equipment: Rubber Pad, Lock Nut Wrench, Wrench, Side Grip

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**570W**
Wire Cup Brush Berus Wayar Cawan 杯型钢丝刷	**110mm (4-3/8")**
Abrasive Disc Size Saiz Cakera 磨盘尺寸	**150mm (6")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**4,500**
Overall Length Panjang Keseluruhan 总长度	**225mm (8-7/8")**
Net Weight Berat Bersih 淨重	**2.9kg (6.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

9237C 180mm (7")

303

Polisher
Penggilap
打蜡机



- **Fast and powerful for clear coat finishes**
  Cepat dan berkuasa untuk kemasan kot yang jelas
  快速清除涂层



Standard Equipment: Side Handle, Hex Wrench, Wool Pad

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,200W**
Capacity Kapasiti 能力	**Wool Pad: 180mm (7")** **Wool Bonnet: 180mm (7")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 3,200**
Dimensions (L x W x H) Dimensi 体积	**431x198x187mm (17"x7-3/4"x7-3/8")**
Net Weight Berat Bersih 淨重	**3.2 - 3.4kg (7.0 - 7.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GRINDING | SANDING

PO5000C 125mm (5") — 318

Random Orbit Polisher
Pelicin Orbit
砂光机



- **Wide variety of optional accessories (Pad, Sponge pad, Felt pad, Wool pad)**
  Pelbagai aksesori pilihan (pad, pad sponge, pad felt, pad bulu)
  各种可选配件（垫，海绵垫，毡垫，羊毛垫）



Standard Equipment: Hex Wrench

PO5000C/PO6000C — VIDEO CLIP — Models and specs may vary by country

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**900W**
Pad Size Saiz Pad 垫子尺寸	**125mm (5")**
Orbits Per Minute (OPM) Bilangan Putaran 轨道转数	**0 - 6,800**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 13,600**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 780**
Orbit Diameter Kelajuan Tanpa Beban 回转数	**5.5 mm (7/32")**
Dimensions (L x W x H) Dimensi 体积	**451x123x134mm (17-3/4"x4-7/8"x5-1/4")**
Net Weight Berat Bersih 净重	**2.8 - 3.0kg (6.2 - 6.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**4.0m (13.1ft)**

PO6000C 150mm (6") — 318

Random Orbit Polisher
Pelicin Orbit
砂光机



- **Wide variety of optional accessories (Pad, Sponge pad, Felt pad, Wool pad)**
  Pelbagai aksesori pilihan (pad, pad sponge, pad felt, pad bulu)
  各种可选配件（垫，海绵垫，毡垫，羊毛垫）



Standard Equipment: Hex Wrench

PO5000C/PO6000C — VIDEO CLIP — Models and specs may vary by country

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**900W**
Pad Size Saiz Pad 垫子尺寸	**150mm (6")**
Orbits Per Minute (OPM) Bilangan Putaran 轨道转数	**0 - 6,800**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 13,600**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 780**
Orbit Diameter Kelajuan Tanpa Beban 回转数	**5.5mm (7/32")**
Dimensions (L x W x H) Dimensi 体积	**451x148x126mm (17-3/4"x5-7/8"x5")**
Net Weight Berat Bersih 净重	**2.8 - 3.0kg (6.2 - 6.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**4.0m (13.1ft)**

PV7000C 180mm (7") — 303

Polisher
Penggilap
抛光机



- **Lightweight for reduced operator fatigue**
  Ringan untuk mengurangkan keletihan pengguna
  轻量不易引起疲劳



Standard Equipment: Side Handle, Pad, Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**900W**
Capacity Kapasiti 能力	**Pad: 180mm (7")** **Wool Bonnet: 180mm (7")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**600 - 2,100**
Overall Length Panjang Keseluruhan 总长度	**210mm (8-1/4")**
Net Weight Berat Bersih 净重	**2.1kg (4.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GD0600 6mm (1/4") — 325

Die Grinder
Gerinda Lurus
电磨



- **Large Flush-Mount Paddle Switch for Comfortable Operation**
  Suis Flush-mount mudah digunakan
  大型平装式扳钮开关易于操作



Standard Equipment: Wrench x2

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**400W**
Capacity Kapasiti 能力	**Collet: 3mm (1/8") or 6mm (1/4")**
Wheel Diameter Diameter Roda 轮片直径	**38mm (1-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**25,000**
Dimensions (L x W x H) Dimensi 体积	**358x82x82mm (14-1/8"x3-1/4"x3-1/4")**
Net Weight Berat Bersih 净重	**1.71 - 1.87kg (3.77 - 4.12lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GD0601 6mm (1/4") — 325

Die Grinder
Gerinda Lurus
电磨



- **Powerful 400W motor**
  Motor berkuasa 400W
  强力400W马达



Standard Equipment: Wrench x2

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**400W**
Capacity Kapasiti 能力	**Collet: 3mm (1/8") or 6mm (1/4")**
Wheel Diameter Diameter Roda 轮片直径	**38mm (1-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**25,000**
Dimensions (L x W x H) Dimensi 体积	**359x82x82mm (14-1/8"x3-1/4"x3-1/4")**
Net Weight Berat Bersih 净重	**1.68 - 1.84kg (3.70 - 4.06lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GRINDING | SANDING

GD0603 6mm (1/4")

64

Die Grinder
Gerinda Lurus
电磨





- **Compact and easy handling**
  Padat dan mudah digunakan
  紧凑且易于使用

Standard Equipment: Spanner, Wheel points

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**240W**
Capacity Kapasiti 能力	**Collet: 6mm (1/4")**
Max Wheel Diameter Diameter Roda 轮片直径	**19mm (3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**28,000**
Diameter of Grip Diameter Silinder 圆筒直径	**65mm**
Dimensions (L x W x H) Dimensi 体积	**289x64x67mm (11-3/8"x2-1/2"x2-5/8")**
Net Weight Berat Bersih 淨重	**0.98kg (2.16lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GD0800C 6mm (1/4")

318

Die Grinder
Gerinda Lurus
电磨





- **Electronic Controller for Operator Convenience**
  Pengawal elektronik untuk kemudahan pengguna
  电子控制器方便使用者

Standard Equipment: Wrench x2

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**750W**
Capacity Kapasiti 能力	**Collet: 3mm (1/8") or 6mm (1/4")**
Wheel Diameter Diameter Roda 轮片直径	**25mm (1")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**7,000-28,000**
Dimensions (L x W x H) Dimensi 体积	**371x75x75mm (14-5/8"x2-15/16"x2-15/16")**
Net Weight Berat Bersih 淨重	**1.88kg (4.14lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GD0801C 6mm (1/4")

318

Die Grinder
Gerinda Lurus
电磨





- **Powerful 750W motor for faster material removal**
  Motor berkuasa 750W untuk pengisaran yang lebih cepat
  功率强大的 750W 马达提供更快的研磨

Standard Equipment: Side Handle, Wrench x2

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**750W**
Capacity Kapasiti 能力	**Collet: 6mm (1/4")**
Max Wheel Diameter Diameter Roda 轮片直径	**25mm (1")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**7,000-29,000**
Dimensions (L x W x H) Dimensi 体积	**390x75x88mm (15-3/8"x2-15/16"x3-1/2")**
Net Weight Berat Bersih 淨重	**1.96 - 1.97kg (4.32 - 4.34lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GD0811C 6mm (1/4")

318

Die Grinder
Gerinda Lurus
电磨





- **Ideal for grinding internal surfaces, removing paint etc. using with flap wheel**
  Sesuai untuk mengisar permukaan dalaman, cat dan lain-lain
  适用于研磨内表面，使用皮瓣轮去除油漆等

Standard Equipment: Side Handle, Wrench x2

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**750W**
Capacity Kapasiti 能力	**Collet: 6mm (1/4")**
Max Wheel Diameter Diameter Roda 轮片直径	**50mm (2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**1,800-7,000**
Dimensions (L x W x H) Dimensi 体积	**390x75x88mm (15-3/8"x2-15/16"x3-1/2")**
Net Weight Berat Bersih 淨重	**1.99 - 2.00kg (4.39 - 4.41lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GS5000 125mm (5")

204

Straight Grinder
Pengisar Lurus
直向砂轮机





- **Powerful 750W motor**
  Motor berkuasa 750W
  强力750W马达

Standard Equipment: Hex Wrench, Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**750W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
Hole Diameter Diameter Lubang 孔直径	**12.7, 20mm (1/2,13/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**5,600**
Dimensions (L x W x H) Dimensi 体积	**590x189x116mm (23-1/4"x7-7/16"x4-9/16")**
Net Weight Berat Bersih 淨重	**5.0 - 5.2kg (11.0 - 11.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GRINDING | SANDING

GS6000 150mm (6")

204

Straight Grinder
Pengisar Lurus
直向砂轮机



- **Powerful 750W motor**
  Motor berkuasa 750W
  强力750W马达



Standard Equipment: Hex Wrench, Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**750W**
Wheel Diameter Diameter Roda 轮片直径	**150mm (6")**
Hole Dia. Diameter Lubang 孔直径	**12.7, 20mm (1/2,13/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**5,600**
Dimensions (L x W x H) Dimensi 体积	**590x216x130mm (23-1/4"x8-1/2"x5-1/8")**
Net Weight Berat Bersih 淨重	**5.2 - 5.4kg (11.4 - 12.0lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

TM3000C

459

Multi Tool
Mesin Pemotong Berbilang Fungsi
多功能切割打磨机



- **Powerful 320W motor with improved performance**
  Motor berkuasa 320W dengan prestasi yang lebih baik
  强力320W马达，改进的性能



Standard Equipment: Hex Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**320W**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**6,000-20,000**
Dimensions (L x W x H) Dimensi 体积	**275x64x92mm (10-7/8"x2-1/2"x3-5/8")**
Net Weight Berat Bersih 淨重	**1.4 - 1.5kg (3.2 - 3.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

TM3000C/TM40D/ TM50D
VIDEO CLIP
Models and specs may vary by country

TM3010CX6

459

Multi Tool
Mesin Pemotong Berbilang Fungsi
多功能切割打磨机



- **Toolless clamp system for fast accessory installation**
  Sistem pemasangan aksesori tanpa alat
  免工具快速安装与更换配件



Standard Equipment: Multi Tool Plunge Cut Saw Blade 32, Segment Saw Blade 85, Sanding Pad



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**320W**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**6,000-20,000**
Dimensions (L x W x H) Dimensi 体积	**283x68x87mm (11-1/8"x2-11/16"x3-7/16")**
Net Weight Berat Bersih 淨重	**1.6 - 1.7kg (3.7 - 3.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

TM3010C
VIDEO CLIP
Models and specs may vary by country

GB602 150mm (6")

Bench Grinder
Pengisar
台式砂轮机



- **Wheel covers have built-in task lights**
  Lampu tugas terbina dalam pelindung roda
  轮罩具有内置任务灯



Standard Equipment: Safety Eye Shield, Protection glasses, Wrench x2

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**250W**
Wheel Diameter Diameter Roda 轮片直径	**150mm (6")**
Wheel Width Lebar Roda 轮片宽度	**16mm (5/8")**
Hole Dia. Diameter Lubang 孔直径	**12.7mm (1/2")**
H.P.	**1/3**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,850 (50Hz)/ 3,450 (60Hz)**
Dimensions (L x W x H) Dimensi 体积	**375x205x286mm (14-49/64"x8"x11-17/64")**
Net Weight Berat Bersih 淨重	**9.31 - 9.08kg (20.02 - 20.52lbs)**

GB801 205mm (8")

Bench Grinder
Pengisar
台式砂轮机



- **Adjustable wheel balance feature reduces vibration**
  Pelarasan imbangan roda mengurangkan getaran
  平衡调整减少振动



Standard Equipment: Safety Eye Shield, Protection glasses, Wrench x2

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**550W**
Wheel Diameter Diameter Roda 轮片直径	**205mm (8")**
Wheel Width Lebar Roda 轮片宽度	**19mm (3/4")**
Hole Dia. Diameter Lubang 孔直径	**15.88mm (5/8")**
H.P.	**3/4**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,850 (50Hz)/ 3,450 (60Hz)**
Dimensions (L x W x H) Dimensi 体积	**395x265x333mm (15-9/16"x10-7/16"x13-7/64")**
Net Weight Berat Bersih 淨重	**19.91 - 19.63kg (43.89 - 43.28lbs)**

GRINDING | SANDING

PC5010C 125mm (5")

318

Concrete Planer
Pengampelas
砂光机





- **Compact and Lightweight for High Production Work**
  Kompak dan ringan untuk kerja pengeluaran yang tinggi
  紧凑轻巧型，更有效率地工作

Standard Equipment: Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	1,400W
Wheel Diameter Diameter Roda 轮片直径	125mm (5")
Hole Diameter Diameter Lubang 孔直径	22.23mm (7/8")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	4,000 - 9,000
Dimensions (L x W x H) Dimensi 体积	350x231x179mm (13-3/4"x9-1/8"x7")
Net Weight Berat Bersih 淨重	2.5 - 3.6kg (5.5 - 7.9lbs.)
Power Supply Cord Kabel Wayar 电源线	4.0m (13.1ft)

PC5000C 125mm (5")

253

Concrete Planer
Pengampelas
砂光机





- **Electronic current limiter helps protect the motor from overload**
  Pengehad arus electronik melindungi motor daripada beban lampau
  电子电流限制器有助于防止马达超负荷

Standard Equipment: Lock Nut Wrench, Hex Wrench, Dust Bag Assembly

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	1,400W
Wheel Diameter Diameter Roda 轮片直径	125mm (5")
Hole Dia. Diameter Lubang 孔直径	22.23mm (7/8")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	10,000
Dimensions (L x W x H) Dimensi 体积	437x235x195mm (17-1/8"x9-1/4"x7-5/8")
Net Weight Berat Bersih 淨重	4kg (8.9lbs)
Power Supply Cord Kabel Wayar 电源线	5.0m (16.4ft)

PC5001C 125mm (5")

253

Concrete Planer
Pengampelas
砂光机





- **Soft start suppresses start-up reaction for more precision and longer tool life**
  Penghidupan secara perlahan untuk ketepatan yang lebih baik dan memanjangkan hayat alat
  缓速启动提高准确性和延长工具使用寿命

Standard Equipment: Lock Nut Wrench, Hex Wrench, Dust Bag Assembly

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	1,400W
Wheel Diameter Diameter Roda 轮片直径	125mm (5")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	10,000
Dimensions (L x W x H) Dimensi 体积	479x182x195mm (18-13/16"x7-1/8"x7-5/8")
Net Weight Berat Bersih 淨重	4kg (8.9lbs)
Power Supply Cord Kabel Wayar 电源线	5m (16.4ft)

PW5001C 125mm (5")

318

Stone Polisher
Penggilap Batu
水磨石机





- **Variable speed control dial enables user to match the speed to the application**
  Pilihan kawalan kelajuan berubah untuk pelbagai aplikasi
  变速控制选择适合多种应用

Standard Equipment: Rubber Pad, Side Grip, Wrench, Head Cover

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	900W
Capacity Kapasiti 能力	Pad: 100-125mm (4-5")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	2,000-4,000
Overall Length Panjang Keseluruhan 总长度	359mm (14-1/8")
Net Weight Berat Bersih 淨重	2.3 - 2.6kg (5.1 - 5.7lbs)
Power Supply Cord Kabel Wayar 电源线	4.0m (13.1ft)

9404 100mm x 610mm (4"x 24")

303

Belt Sander
Pengampelas
带式砂光机





- **Powerful 1,010W motor for fast material removal**
  Motor berkuasa 1,010W untuk pengisaran yang lebih cepat
  功率强大的 1,010W 马达提供更快的研磨

Standard Equipment: Abrasive Belt, Dust bag assembly

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	1,010W
Belt Size Saiz Tali Pinggang 皮带尺寸	100 x 610mm (4" x 24")
Belt Speed Kelajuan Tali Pinggang 皮带速度	210-440m/min (690-1,440ft/min)
Overall Length Panjang Keseluruhan 总长度	334mm (13-1/8")
Net Weight Berat Bersih 淨重	4.8kg (10.6lbs)
Power Supply Cord Kabel Wayar 电源线	5.0m (16.4ft)

GRINDING | SANDING

9903 76mm x 533mm (3"x 21")

303

Belt Sander
Pengampelas
带式砂光机



- **Sands wood or metal and removes paint and rust**
  Melicinkan kayu atau logam, menghilangkan cat dan karat
  打磨木头或金属，去除油漆和铁锈



Standard Equipment: Abrasive Belt, Dust bag assembly

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,010W**
Belt Size Saiz Tali Pinggang 皮带尺寸	**76 x 533mm (3" x 21")**
Belt Speed Kelajuan Tali Pinggang 皮带速度	**210 - 440m/min (690 - 1,440 ft/min)**
Overall Length Panjang Keseluruhan 总长度	**296mm (11-5/8")**
Net Weight Berat Bersih 净重	**4.3kg (9.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

9401 100mm x 610mm (4"x 24")

153

Belt Sander
Pengampelas
带式砂光机



- **Highly-efficient dust collection system for clean work environment**
  Sistem pengumpulan habuk yang cekap untuk mewujudkan persekitaran kerja bersih
  高效的集尘系统打造清洁工作环境



Standard Equipment: Abrasive Belt, Carbon Plate, Step, Dust bag assembly

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**940W**
Belt Size Saiz Tali Pinggang 皮带尺寸	**100 x 610mm (4" x 24")**
Belt Speed Kelajuan Tali Pinggang 皮带速度	**350m/min (1,150ft/min)**
Overall Length Panjang Keseluruhan 总长度	**374mm (14-3/4")**
Net Weight Berat Bersih 净重	**7.2kg (15.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

9924DB 76mm x 610mm (3"x 24")

100

Belt Sander
Pengampelas
带式砂光机



- **Powerful 850W for fast material removal**
  Motor berkuasa 750W untuk pengisaran yang lebih cepat
  功率强大的 750W 马达提供更快的研磨



Standard Equipment: Abrasive Belt, Carbon Plate, Dust bag assembly

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**850W**
Belt Size Saiz Tali Pinggang 皮带尺寸	**76 x 610, 620mm (3" x 24, 24-3/8")**
Belt Speed Kelajuan Tali Pinggang 皮带速度	**400m/min (1,300ft/min)**
Overall Length Panjang Keseluruhan 总长度	**355mm (14")**
Net Weight Berat Bersih 净重	**4.8kg (10.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

9911 76mm x 457mm (3"x 18")

411

Belt Sander
Pengampelas
带式砂光机



- **Compact and well balanced for easy operation**
  Padat dan mudah digunakan
  紧凑且易于使用



Standard Equipment: Abrasive Belt, Dust bag assembly

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**650W**
Belt Size Saiz Tali Pinggang 皮带尺寸	**76 x 457mm (3" x 18")**
Belt Speed Kelajuan Tali Pinggang 皮带速度	**75 - 270m/min (250 - 900ft/min)**
Overall Length Panjang Keseluruhan 总长度	**262mm (10-3/8")**
Net Weight Berat Bersih 净重	**2.7kg (6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

9031 30mm x 533mm (1-3/16"x 21")

411

Belt Sander
Pengampelas
带式砂光机



- **Versatile for use on wood, metal, and fiberglass materials**
  Digunakan pada bahan kayu, logam, dan gentian kaca
  多用于木材，金属和纤维玻璃材料



Standard Equipment: Abrasive Belt x10, Side Handle

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**550W**
Belt Size Saiz Tali Pinggang 皮带尺寸	**30 x 533mm (1-1/8" x 21")**
Belt Speed Kelajuan Tali Pinggang 皮带速度	**200 - 1,000m/min (656 - 3,280ft/min)**
Overall Length Panjang Keseluruhan 总长度	**380mm (15")**
Net Weight Berat Bersih 净重	**2.1kg (4.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GRINDING | SANDING

BO3710

64

Finishing Sander
Pengampelas
砂光机





- **High capacity dust bag with built-in vacuum adaptor for improved dust collection**
  Beg debu kapasiti tinggi dengan penyesuai vakum terbina dalam untuk pengumpulan habuk yang lebih baik
  内置真空适配器的高容量集尘袋可改进集尘效果

Standard Equipment: Dust Bag, Punch Plate

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**190W**
Pad Size Saiz Pad 垫子尺寸	**93 x 185mm (3-5/8" x 7-1/4")**
Abrasive Paper Size Saiz Kertas Pasir 砂纸尺寸	**93 x 228mm (3-5/8" x 9")**
Orbits Per Minute (OPM) Bilangan Putaran 轨道转数	**11,000**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**22,000**
Orbit Diameter Jejaki Diameter 轨道直径	**2.0mm (1/16")**
Dimensions (L x W x H) Dimensi 体积	**253x92x154mm (10"x3-5/8"x6-1/16")**
Net Weight Berat Bersih 净重	**1.6kg (3.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

9035H

419

Finishing Sander
Pengampelas
砂光机





- **Rubberized large paper clamp levers for easy installation/ removal of paper**
  Batang pengapit getah yang besar memudahkan pemasangan dan penyingkiran kertas pasir
  大号橡胶夹杆方便安装及取出砂纸

Standard Equipment: Abrasive paper x6

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**180W**
Pad Size Saiz Pad 垫子尺寸	**93 x 185mm (3-5/8" x 7-1/4")**
Abrasive Paper Size Saiz Kertas Pasir 砂纸尺寸	**93 x 228mm (3-5/8" x 9")**
Orbits Per Minute (OPM) Kelajuan Ayunan 摆动速度	**11,000**
Dimensions (L x W x H) Dimensi 体积	**236x93x146mm (9-1/4"x3-5/8"x5-3/4")**
Net Weight Berat Bersih 净重	**1.5kg (3.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

BO4901

419

Finishing Sander
Pengampelas
砂光机





- **Large clamp lever for easy install/ removal of paper**
  Batang pengapit yang besar memudahkan pemasangan dan penyingkiran kertas pasir
  大夹紧杆方便安装及取出砂纸

Standard Equipment: Abrasive Paper

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**330W**
Pad Size Saiz Pad 垫子尺寸	**115 x 229mm (4-1/2" x 9")**
Abrasive Paper Size Saiz Kertas Pasir 砂纸尺寸	**115 x 280mm (4-1/2" x 11")**
Orbits Per Minute (OPM) Kelajuan Ayunan 摆动速度	**10,000**
Overall Length Panjang Keseluruhan 总长度	**289mm (11-3/8")**
Net Weight Berat Bersih 净重	**2.8kg (6.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

9045B 114mm (4-1/2")

105

Finishing Sander
Pengampelas
砂光机





- **All bearing construction for smooth, long term operation**
  Konstruksi galas yang sesuai untuk operasi lancar dan jangka panjang
  适合平滑及长期运行的轴承结构

Standard Equipment: Abrasive paper x10

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**520W**
Pad Size Saiz Pad 垫子尺寸	**114 x 234mm (4-1/2" x 9-1/4")**
Abrasive Paper Size Saiz Kertas Pasir 砂纸尺寸	**114 x 280mm (4-1/2" x 11")**
Orbits Per Minute (OPM) Kelajuan Ayunan 摆动速度	**10,000**
Overall Length Panjang Keseluruhan 总长度	**240mm (9-1/2")**
Orbit Diameter Jejaki Diameter 轨道直径	**2.4mm (3/32")**
Net Weight Berat Bersih 净重	**2.6kg (5.7lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

BO4510H

419

Finishing Sander
Pengampelas
砂光机





- **Large clamp lever for easy install/ removal of paper**
  Batang pengapit yang besar memudahkan pemasangan dan penyingkiran kertas pasir
  大夹紧杆方便安装及取出砂纸

Standard Equipment: Abrasive paper x6

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**170W**
Pad Size Saiz Pad 垫子尺寸	**110 x 100mm (4-5/16" x 3-15/16")**
Abrasive Paper Size Saiz Kertas Pasir 砂纸尺寸	**114 x 140mm (4-1/2" x 5-1/2")**
Orbits Per Minute (OPM) Bilangan Putaran 轨道转数	**12,000**
Dimensions (L x W x H) Dimensi 体积	**116x110x129mm (4-9/16"x4-5/16"x5-1/8")**
Net Weight Berat Bersih 净重	**1.1kg (2.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GRINDING | SANDING

BO4556

419

Finishing Sander
Pengampelas
砂光机



- **14,000OPM for fast and smooth finish sanding**
  14,000OPM untuk pelicinan cepat dan lancar
  14,000OPM可快速平顺的打磨



Standard Equipment: Abrasive Paper, Dust Bag, Punch Plate

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**200W**
Pad Size Saiz Pad 垫子尺寸	**112 x 102mm (4-3/8" x 4")**
Abrasive Paper Size Saiz Kertas Pasir 砂纸尺寸	**114 x 140mm (4-1/2" x 5-1/2")**
Orbits Per Minute (OPM) Bilangan Putaran 轨道转数	**14,000**
Dimensions (L x W x H) Dimensi 体积	**131x112x141mm (5-1/8"x4-3/8"x5-9/16")**
Net Weight Berat Bersih 淨重	**1.1kg (2.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

BO6050J

325

Random Orbit Sander
Pengampelas
砂光机



- **Slim skirt provides higher work efficiency in tight spaces**
  Kecekapan kerja yang lebih tinggi di ruang yang sempit
  在狭小空间中提供更高的工作效率



Standard Equipment:
Abrasive Paper, Side Grip

BO6050 VIDEO CLIP
Models and specs may vary by country

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**750W**
Pad Diameter Saiz Pad 垫子尺寸	**150mm (6")**
Abrasive Disc Size Saiz Cakera 磨盘尺寸	**150mm (6")**
Orbits Per Minute (OPM) Bilangan Putaran 轨道转数	**1,600 - 6,800**
Sanding Strokes Per Minute (SPM) Menggilap Strok Seminit 每分钟打磨冲程	**3,200 - 13,600**
Pad Speed in Roto-orbit mode (rpm) Kelajuan Pad 垫速度	**140 - 600**
Orbit Diameter Jejaki Diameter 轨道直径	**5.5mm (7/32")**
Dimensions (L x W x H) Dimensi 体积	**330x155x145mm (13"x6-1/8"x5-3/4")**
Net Weight Berat Bersih 淨重	**2.6kg (5.7lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

BO5031

419

Random Orbit Sander
Pengampelas
砂光机



- **Smooth finish with variable speed control**
  Kemasan lancar dengan kawalan kelajuan yang pelbagai
  变速控制



Standard Equipment: Abrasive Paper, Dust Bag

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**300W**
Pad Diameter Saiz Pad 垫子尺寸	**123mm (4-7/8")**
Abrasive Disc Size Saiz Cakera 磨盘尺寸	**125mm (5")**
Orbits Per Minute (OPM) Bilangan Putaran 轨道转数	**4,000-12,000**
Dimensions (L x W x H) Dimensi 体积	**153x123x153mm (6"x4-7/8"x6")**
Net Weight Berat Bersih 淨重	**1.3kg (3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

BO5041

64

Random Orbit Sander
Pengampelas
砂光机



- **More power for faster sanding and a smooth finish**
  Lebih berkuasa untuk pelicinan cepat dan lancar
  更快速的打磨



Standard Equipment: Abrasive Paper, Dust Bag

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**300W**
Pad Diameter Saiz Pad 垫子尺寸	**123mm (4-7/8")**
Abrasive Disc Size Saiz Cakera 磨盘尺寸	**125mm (5")**
Orbits Per Minute (OPM) Bilangan Putaran 轨道转数	**4,000-12,000**
Dimensions (L x W x H) Dimensi 体积	**218x123x153mm (8-5/8"x4-7/8"x6")**
Net Weight Berat Bersih 淨重	**1.4kg (3.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**



SAWING
Gergaji 锯切

LS1019L 260mm (10-1/4")

153

Slide Compound Miter Saw
Gergaji Kompaun Miter
斜断锯



- **Large turn base supports workpiece securely for increased stability**
  Dasar besar untuk menyokong bahan kerja dengan stabil
  大转动底座稳定地支撑工件



Standard Equipment: EFFICUT Saw Blade, Dust Bag, Triangular Rule, Vertical Vise, Hex Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,510W**
Blade Diameter Diameter Bilah 锯片直径	**260mm (10-1/4")**
Bevel Angle Sudut Bevel 斜角	**48°L/ 48°R**
Miter Angle Sudut Miter 斜接角	**60°L/ 60°R**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**Crown Molding Vertically Nested: 168mm (6-5/8")** **Crown Molding Lying Flat: 248mm (9-3/4")** **Base Board Against Fence: 133mm (5-1/4")** **Base Board Lying Flat: 305mm (12")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,200**
Dimensions (L x W x H) Dimensi 体积	**805x644x660mm** **(31-3/4"x25-3/8"x26")**
Net Weight Berat Bersih 淨重	**26.3kg (57.9lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

LS1219L 305mm (12")

153

Slide Compound Miter Saw
Gergaji Kompaun Miter
斜断锯



- **Dual dust collection ports provide excellent dust extraction performance**
  Dua pengumpul habuk untuk prestasi pengekstrakan habuk yang sangat baik
  双重集尘口提供出色的除尘性能



Standard Equipment: TCT Saw Blade (B-67474), Vertical Vise, Hex Wrench, Triangular Rule, Dust Bag

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,800W**
Blade Diameter Diameter Bilah 锯片直径	**305mm (12")**
Hole Diameter Diameter Lubang 孔直径	**European Countries: 30mm (1-3/16")** **Others: 25.4mm (1")**
Angle Sudut 角度	**Bevel 48° L / 48° R** **Miter 60° L / 60° R**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**Crown Molding Vertically Nested: 203mm (8")** **Crown Molding Lying Flat: 320mm (12-5/8")** **Base Board Against Fence: 171mm (6-3/4")** **Base Board Lying Flat: 416mm (16-3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,200**
Dimensions (L x W x H) Dimensi 体积	**898x664x725mm** **(35-1/4"x26-1/8"x28-1/2")**
Net Weight Berat Bersih 淨重	**29.5kg (65.0lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

LS1018L 260mm (10-1/4")

JM23000123

Slide Compound Saw
Gergaji Kompaun Miter
斜断锯



- **Large cutting capacity in a compact design and less weight**
  Kapasiti pemotongan besar dalam reka bentuk kompak dan ringan
  设计紧凑，轻量，切割能力大



Standard Equipment: TCT Saw Blade (B-14277), Vertical Vise, Socket Wrench, Triangular Rule, Dust Bag, Holder assembly

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,430W**
Blade Diameter Diameter Bilah 锯片直径	**255 - 260mm (10 - 10-1/4")**
Miter Angle Sudut Miter 斜接角	**47°L/ 60°R**
Bevel Angle Sudut Bevel 斜角	**45°L/ 45°R**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 91 x 305mm (3-5/8" x 12")** **45°: 91 x 215mm (3-5/8" x 8-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**4,300**
Dimensions (L x W x H) Dimensi 体积	**825x536x633mm** **(32-1/2"x21-1/8"x25")**
Net Weight Berat Bersih 淨重	**20.6kg (45.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

LS1040 260mm (10-1/4")

153

Compound Miter Saw
Gergaji Kompaun Miter
斜断锯



- **Powerful 1,650W direct drive motor for improved performance**
  Motor 1,650W yang berkuasa meningkatkan prestasi
  功率强劲的1,650W直驱马达提高了性能



Standard Equipment: Socket Wrench, Dust Bag, Holder Set, Vertical Vise, Triangular Rule

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,650W**
Blade Diameter Diameter Bilah 锯片直径	**260mm (10-1/4")**
Miter Angle Sudut Miter 斜接角	**45°L/ 52°R**
Bevel Angle Sudut Bevel 斜角	**45°L**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 90.5 x 95mm (3-9/16" x 3-3/4")** **45°: 90.5 x 67mm (3-9/16" x 2-5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**4,600**
Dimensions (L x W x H) Dimensi 体积	**530x476x532mm** **(20-7/8"x18-3/8"x21")**
Net Weight Berat Bersih 淨重	**12.4kg (27.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

SAWING

LS0714 190mm (7-1/2")

153

Slide Compound Saw
Gergaji Kompaun Miter
斜断锯



- **Compact and Lightweight for Increased Jobsite Portability**
  Kompak dan Ringan
  小巧轻便



Standard Equipment: Carbide-Tipped Saw Blade, Dust Bag, Holder Set, Vertical Vise, Triangular Rule

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,010W**
Blade Diameter Diameter Bilah 锯片直径	**190mm (7-1/2")**
Miter Angle Sudut Miter 斜接角	**47°L/ 57°R**
Bevel Angle Sudut Bevel 斜角	**45°L / 5°R**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 52 x 300mm (2-1/16" x 11-3/4")** **45°: 52 x 212mm (2-1/16" x 8-3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**6,000**
Dimensions (L x W x H) Dimensi 体积	**670x430x458mm** **(26-3/8"x17"x18")**
Net Weight Berat Bersih 淨重	**13.1kg (28.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

LH1201FL 305mm (12")

JM23000123

Table Top Miter Saw
Gergaji Miter
两用平台斜切锯

2in1

- **2 tools in 1 for convenience and versatility**
  Alat 2 dalam 1
  1机2用



Standard Equipment: TCT Saw Blade, Vertical Vise, Dust Bag, Rip Fence, Ring, Triangular Rule, Push Stick, Blade Cover, Socket Wrench, Holder Set

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,650W**
Blade Diameter Diameter Bilah 锯片直径	**305mm (12")**
Miter Angle Sudut Miter 斜接角	**47°L/ 52°R**
Bevel Angle Sudut Bevel 斜角	**45°L**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 62 x 200mm (2-7/16" x 7-7/8")/ 90°: 95 x 155mm (3-3/4" x 6-1/8")/ 45° Miter, L/R: 62 x 135mm (2-7/16" x 5-5/16")/ 45° Miter, L/R: 95 x 110mm (3-3/4" x 4-5/16")/ 90°, Table saw: 52mm (2-1/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,800**
Dimensions (L x W x H) Dimensi 体积	**610x535x692mm (24"x21"x27-1/4")** **Table Size (W x L): 307 x 465mm (12-1/8" x 18-1/4")**
Net Weight Berat Bersih 淨重	**20.9kg (46.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

MAXIMUM CUTTING CAPACITY

Kapasiti Pemotongan Maksimum 最大切割能力

Model No.	Base Angle	Blade Angle Left 45°	Blade Angle 0°	Blade Angle Right 5°	Blade Angle Right 45°
LS0714	0°	40x300mm	52x300mm	40x300mm	-
	Left / Right 45°	40x212mm	52x212mm	-	-
	-	-	-	-	-
	Right 57°	-	52x163mm	-	-
LS1018L	0°	50x305mm	91x305mm	-	31x305mm
	Left / Right 45°	50x215mm	91x215mm	-	31x215mm
	-	-	-	-	-
	Right 60°	-	91x150mm	-	-
LS1019L	0°	47x305, 61x279mm	71x305, 91x279mm	-	29x305, 43x279mm
	Left / Right 45°	47x215, 61x197mm	71x215, 91x197mm	-	29x215, 43x197mm
	Left / Right 60°	-	71x152, 91x139mm	-	-
	-	-	-	-	-
LS1219L	0°	71x363mm	107x363mm	-	54x363mm
	Left / Right 45°	71x255mm	107x255mm	-	54x255mm
	Left / Right 60°	-	107x178mm	-	-
	-	-	-	-	-
LS1040	0°	48x95mm	90.5x95mm	-	-
	Left / Right 45°	48x67mm	90.5x67mm	-	-
	-	-	-	-	-
	-	-	-	-	-
LH1201FL	0°	64x155mm	95x155mm	-	-
	Left 45°	64x65mm	95x110mm	-	-
	Right 45°	40x125mm	95x110mm	-	-
	Cutting capacity as table saw: 52mm				
LS1440	-	-	122x152mm	-	-
	-	-	122x115mm	-	-
	-	-	-	-	-
	-	-	-	-	-
LS1030N	-	-	90.5x95mm	-	-
	-	-	90.5x67mm	-	-
	-	-	-	-	-
	-	-	-	-	-
LF1000	-	-	20x210mm	-	-
	-	-	68x155mm	-	-
	-	-	50x150mm	-	-
	-	-	-	-	-

SAWING

LS1440 355mm (14")

153

Miter Saw
Gergaji Miter
斜断锯





- **Large cutting capacity**
  Kapasiti pemotongan besar
  大切割能力


Standard Equipment: Socket Wrench, Vise Assembly, Dust Bag, Holder Set

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,380W**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 122 x 152mm (4-13/16" x 6")** **45°: 122 x 115mm (4-13/16" x 4-1/2")**
Blade Diameter Diameter Bilah 锯片直径	**355mm (14")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,200**
Dimensions (L x W x H) Dimensi 体积	**530x596x435mm** **(20-7/8"x23-1/2"x17-1/8")**
Net Weight Berat Bersih 淨重	**34.2kg (75.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

LS1030N 260mm (10-1/4")

153

Miter Saw
Gergaji Miter
斜断锯





- **Miter cuts 0°-45° left and 0°-52° right**
  Serong 0 ° -45 ° ke kiri dan 0 ° -52 ° ke kanan
  斜切向左 0° -45° 和向右 0° -52°

Standard Equipment: Socket Wrench, Dust Bag, Triangular Rule

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,650W**
Blade Diameter Diameter Bilah 锯片直径	**260mm (10-1/4")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 90.5 x 95mm (3-9/16" x 3-3/4")** **45°: 90.5 x 67mm (3-9/16" x 2-5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**4,600**
Dimensions (L x W x H) Dimensi 体积	**530x476x532mm** **(20-7/8"x18-3/4"x21")**
Net Weight Berat Bersih 淨重	**12.1kg (26.7lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

LF1000 260mm (10-1/4")

153

Flip Over Saw
Gergaji Flip
翻转锯





- **Quick miter saw/ table saw conversion**
  Konversi gergaji miter & gergaji meja
  斜割锯及台锯快速转换

Standard Equipment: Rip Fence, Miter Gauge, Push Stick, Top Cover Assy (Top Blade Guard), Dust Cover, Dust Bag, Wrench 8


Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,650W**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 20 x 210mm (13/16" x 8-1/4")** **90°: 68 x 155mm (2-11/16" x 6-1/8")** **45°: 50 x 150mm (2" x 5-7/8")**
Blade Diameter Diameter Bilah 锯片直径	**260mm (10-1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,700**
Dimensions (L x W x H) Dimensi 体积	**Miter saw : 660x650x1,220mm** **(26"x25-1/2"x48")** **Table saw: 660x650x1,060mm** **(26"x25-1/2"x41-3/4")**
Net Weight Berat Bersih 淨重	**36.0 kg (79.4 lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5 m (8.2 ft)**

2704 260mm (10-1/4")

153

Table Saw
Gergaji Meja
台锯



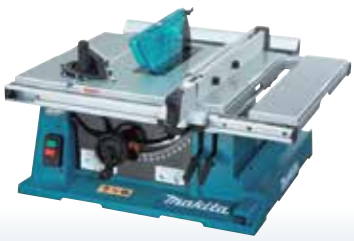

- **Electric brake for increased productivity and operator safety**
  Brek Elektrik untuk peningkatan produktiviti dan pengendali keselamatan
  电子自动刹车提高生产率和操作安全

Standard Equipment: Carbide-Tipped Saw Blade (B-17734), Rip Fence, Miter Gauge, Wrenches, Push Stick, Ring

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,650W**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 93mm (3-5/8")** **45°: 64mm (2-1/2")**
Blade Diameter Diameter Bilah 锯片直径	**260mm (10-1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**4,800**
Dimensions (L x W x H) Dimensi 体积	**665x766x344mm** **(26-1/4"x30-1/4"x13-1/2")**
Net Weight Berat Bersih 淨重	**35.6 - 37.3kg (78.5 - 82.3lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

MLT100 260mm (10-1/4")

Table Saw
Gergaji Meja
台锯





- **Right and rear extension table enables greater cutting capacity**
  Meja tambahan kanan dan belakang membolehkan kapasiti pemotongan yang lebih besar
  右侧和后侧延伸台具有更大的切割能力

Standard Equipment: Carbide-Tipped Saw Blade, Rip Fence, Miter Gauge, Wrenches, Push Stick, Triangular Rule

Continuous rating input Input Kuasa Berterusan 额定输入功率	**1,500W**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 91mm (3-9/16")** **45°: 63mm (2-1/2")**
Blade Diameter Diameter Bilah 锯片直径	**260mm (10-1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**4,300**
Dimensions (L x W x H) Dimensi 体积	**726x984x333mm** **(28-1/2"x38-3/4"x13-1/8")**
Net weight Berat Bersih 淨重	**34.1kg (75.2lbs)**
Power supply cord Kabel Wayar 电源线	**2.5m (8.2ft)**

SAWING

2712 315mm (12-3/8")

Table Saw
Gergaji Meja
台锯



- **Powerful 2,000W motor for fast cutting**
  Motor berkuasa 2,000W untuk pemotongan pantas
  功能强大的2,000W马达快速切割

Standard Equipment: Carbide-Tipped Saw Blade, Rip Fence, Miter Gauge, Wrenches, Push Stick, Ring



Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 85mm (3-3/8")** **45°: 58mm (2-1/4")**
Blade Diameter Diameter Bilah 锯片直径	**315mm (12-3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**50Hz: 2,950** **60Hz: 3,400**
Bevel Capacity Kapasiti Bevel 斜角容量	**0° - 45°**
Dimensions (L x W x H) Dimensi 体积	**1,670x700x810mm** **(65-3/4"x27-1/2"x32")**
Net weight Berat Bersih 淨重	**54kg (118.9lbs)**
Power supply cord Kabel Wayar 电源线	**3.0m (9.8ft)**

HS6100 165mm (6-1/2") 174

Circular Saw
Gergaji Piring
圆锯



- **Smooth cutting at high rotational speed**
  Pemotongan licin pada kelajuan putaran tinggi
  在高转速下平滑切割

Standard Equipment: Carbide-Tipped Saw Blade (B-02917), Hex Wrench, Rip Fence (Guide Rule), Dust Nozzle (195801-0)



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,100W**
Blade Diameter Diameter Bilah 锯片直径	**165mm (6-1/2")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 54.5mm (2-1/8")/ 45°: 39.5mm (1-9/16")/ 50°: 35.5mm (1-3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**5,500**
Dimensions (L x W x H) Dimensi 体积	**297x246x246mm** **(11-3/4"x9-11/16"x9-11/16")**
Net Weight Berat Bersih 淨重	**3.5kg (7.7lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

HS6600 165mm (6-1/2") 303

Circular Saw
Gergaji Piring
圆锯



- **More compact and lightweight design**
  Reka bentuk lebih padat dan ringan
  更小巧轻便的设计

Standard Equipment: Rip Fence (Guide Rule), TCT Saw Blade (B-02917), Hex Wrench



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,050W**
Blade Diameter Diameter Bilah 锯片直径	**165mm (6-1/2")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 54.5mm (2-1/8")** **45°: 37.5mm (1-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**5,200**
Dimensions (L x W x H) Dimensi 体积	**296x230x243mm** **(11-5/8"x9"x9-9/16")**
Net Weight Berat Bersih 淨重	**3.5kg (7.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

HS7010 185mm (7-1/4") / 190mm (7-1/2") 303

Circular Saw
Gergaji Piring
圆锯



- **High Power and Increased Motor-Burnout Resistance**
  Berkuasa Tinggi
  高功率

Standard Equipment: TCT Saw Blade, Rip Fence (Guide Rule), Hex Wrench



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,600W**
Blade Diameter Diameter Bilah 锯片直径	**185/ 190mm (7-1/4"/ 7-1/2")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 65/ 67mm (2-9/16"/ 2-5/8")** **45°: 44/ 45mm (1-3/4"/ 1-3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**5,500**
Dimensions (L x W x H) Dimensi 体积	**300x240x261mm** **(11-3/4"x9-1/2"x10-1/4")**
Net Weight Berat Bersih 淨重	**4.0kg (8.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

HS7600 185mm (7-1/4") 303

Circular Saw
Gergaji Piring
圆锯



- **Powerful 1,200W motor**
  Motor berkuasa 1,200W
  强力1,200W马达

Standard Equipment: TCT Saw Blade, Rip Fence (Guide Rule), Hex Wrench



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,200W**
Blade Diameter Diameter Bilah 锯片直径	**185mm (7-1/4")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 64mm (2-1/2")** **45°: 42mm (1-5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**5,200**
Dimensions (L x W x H) Dimensi 体积	**309x234x255mm** **(12-1/8"x9-1/4"x10")**
Net Weight Berat Bersih 淨重	**3.8kg (8.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

SAWING

5806B 185mm (7-1/4")

303

Circular Saw
Gergaji Piring
圆锯



- **Powerful motor for smooth operation even in heavy duty cutting**
  Motor berkuasa untuk operasi lancar walaupun dalam pemotongan tugas berat
  强大的马达即使在重型切割中也可以平稳运行

Standard Equipment: Carbide-Tipped Saw Blade, Hex Wrench, Rip Fence (Guide Rule)



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,050W**
Blade Diameter Diameter Bilah 锯片直径	**185mm (7-1/4")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 66mm (2-5/8")** **45°: 44mm (1-11/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**5,200**
Overall Length Panjang Keseluruhan 总长度	**282mm (11-1/8")**
Net Weight Berat Bersih 净重	**3.5kg (7.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

5008MG 210mm (8-1/4")

153

Circular Saw
Gergaji Piring
圆锯



- **Powerful 1,800W motor for proven performance**
  Motor berkuasa 1,800W untuk prestasi yang terbukti
  功率强大的1,800W马达，性能可靠

Standard Equipment: TCT Saw Blade (D-29066), Hex Wrench, Rip Fence (Guide Rule)



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,800W**
Blade Diameter Diameter Bilah 锯片直径	**210mm (8-1/4")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 75.5mm (3")** **45°: 57mm (2-1/4")** **50°: 51.5mm (2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**5,200**
Dimensions (L x W x H) Dimensi 体积	**332x243x277mm** **(13-1/8"x9-9/16"x10-7/8")**
Net Weight Berat Bersih 净重	**4.8kg (10.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

N5900B 235mm (9-1/4")

153

Circular Saw
Gergaji Piring
圆锯



- **High power 2,000W to rip through most materials**
  Kuasa tinggi 2,000W untuk pemotongan pelbagai bahan
  大功率2000W可以切割大部分材料

Standard Equipment: Carbide-Tipped Saw Blade, Rip Fence (Guide Rule), Wrench 13



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,000W**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 85mm (3-3/8")** **45°: 60mm (2-3/8")** **50°: 53mm (2-1/16")**
Blade Diameter Diameter Bilah 锯片直径	**235mm (9-1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**4,100**
Overall Length Panjang Keseluruhan 总长度	**380mm (15")**
Net Weight Berat Bersih 净重	**6.8kg (14.8lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

HS0600 260mm (10-1/4")/ 270mm (10-5/8")

153

Circular Saw
Gergaji Piring
圆锯



- **Powerful 2,100W motor**
  Motor berkuasa 2,100W
  强力2,100W马达

Standard Equipment: TCT Saw Blade, Rip Fence (Guide Rule), Hex Wrench



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,000W**
Blade Diameter Diameter Bilah 锯片直径	**260/ 270mm (10-1/4" / 10-5/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 97/ 101mm (3-13/16" / 4")** **45°: 68/ 71mm (2-11/16" / 2-13/16")** **50°: 61/ 63mm** **(2-3/8" / 2-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**4,300**
Dimensions (L x W x H) Dimensi 体积	**418x273x324mm** **(16-1/2"x10-3/4"x12-3/4")**
Net Weight Berat Bersih 净重	**6.9kg (15.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

5103N 335mm (13-1/8")

153

Circular Saw
Gergaji Piring
圆锯



- **Smooth cutting at high rotational speed**
  Pemotongan licin pada kelajuan putaran tinggi
  在高转速下平滑切割

Standard Equipment: Wrench, Rip Fence (Guide Rule)



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,750W**
Blade Diameter Diameter Bilah 锯片直径	**335mm (13-1/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 128mm (5")** **45°: 91mm (3-5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,900**
Overall Length Panjang Keseluruhan 总长度	**505mm (19-7/8")**
Net Weight Berat Bersih 净重	**8.9kg (19.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

SAWING

5402 415mm (16-5/16") — 153

Circular Saw
Gergaji Piring
圆锯



- **Smooth cutting at high rotational speed**
  Pemotongan licin pada kelajuan putaran tinggi
  在高转速下平滑切割



Standard Equipment: Combination Saw Blade, Hex Wrench, Rip Fence (Guide Rule)

Blade Diameter Diameter Bilah 锯片直径	415mm (16-5/16")
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	90°: 157mm (6-3/16") 45°: 106mm (4-3/16")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	2,200
Overall Length Panjang Keseluruhan 总长度	615mm (24-1/4")
Net Weight Berat Bersih 净重	12.9kg (28.4lbs)
Power Supply Cord Kabel Wayar 电源线	5.0m (16.4ft)

SP6000J 165mm (6-1/2") — 303

Plunge Cut Circular Saw
Gergaji Piring
圆锯



- **Built-in current limiter helps prevent motor burnout**
  Pengehad arus terbina dalam mencegah motor dari terbakar
  电流限制器有助于防止马达烧毁



Standard Equipment: TCT Saw Blade (B-07353), Hex Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	1,300W
Blade Diameter Diameter Bilah 锯片直径	165mm (6-1/2")
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	90°: 56mm (2-3/16") 45°: 40mm (1-9/16") 48°: 38mm (1-1/2")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	2,000 - 5,800
Dimensions (L x W x H) Dimensi 体积	341x225x250mm (13-3/8"x8-7/8"x9-7/8")
Net Weight Berat Bersih 净重	4.1kg (9lbs)
Power Supply Cord Kabel Wayar 电源线	2.5m (8.2ft)

4329 — 64

Jig Saw
Gergaji Jig
线锯机



- **Bevel cuts to 45° right or left and positive stop at 90° for solid cutting performance**
  Kelajuan tinggi dan kecekapan tinggi
  高速与高效率



Standard Equipment: Jig Saw Blade (B-10), Hex Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	450W
Max Cutting Capacity at 90° Kapasiti Pemotongan Maksimum 最大切割能力	Wood: 65 mm (2-9/16") Steel: 6 mm (1/4")
Length of Stroke Panjang Strok 冲程长度	18 mm (11/16")
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	500 - 3,100
Dimensions (L x W x H) Dimensi 体积	223x77x197mm (8-3/4"x3"x7-3/4")
Net Weight Berat Bersih 净重	1.9kg (4.2lbs.)
Power Supply Cord Kabel Wayar 电源线	2.0m (6.6ft)

4350CT — 419

Jig Saw
Gergaji Jig
线锯机



- **3 orbital settings plus straight cutting with a powerful 720W motor**
  3 tetapan orbital serta pemotongan lurus dengan motor berkuasa 720W
  强力的720W马达，3个轨道设置与直切割



Standard Equipment: Hex Wrench, Cover Plate, Anti-Splintering Device, Jig Saw Blade Set (No. B-10, BR-13, B-22, 2pcs each)

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	720W
Capacity Kapasiti 能力	Wood: 135mm (5-5/16") Steel: 10mm (3/8")
Length of Stroke Panjang Strok 冲程长度	26mm (1")
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	800 - 2,800
Dimensions (L x W x H) Dimensi 体积	236x73x207mm (9-1/4"x 2-7/8"x 8-1/8")
Net Weight Berat Bersih 净重	2.7kg (5.8lbs)
Power Supply Cord Kabel Wayar 电源线	2.5m (8.2ft)

4351CT — 419

Jig Saw
Gergaji Jig
线锯机



- **Bevel cuts to 45° right or left and positive stop at 90° for solid cutting performance**
  Potongan serong ke 45 ° kanan atau kiri dan berhenti positif pada 90 ° untuk prestasi pemotongan pepejal
  斜面切削45° 左右，90° 正向切削，切削性能稳定



Standard Equipment: Hex Wrench, Cover Plate, Anti-Splintering Device, Jig Saw Blade Set (No. B-10, BR-13, B-22, 2pcs each)

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	720W
Capacity Kapasiti 能力	Wood: 135mm (5-5/16") Steel: 10mm (3/8")
Length of Stroke Panjang Strok 冲程长度	26 mm (1")
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	800 - 2,800
Dimensions (L x W x H) Dimensi 体积	271x73x187mm (10-11/16"x 2-7/8"x 7-3/8")
Net Weight Berat Bersih 净重	2.6kg (5.7lbs)
Power Supply Cord Kabel Wayar 电源线	2.5m (8.2ft)

SAWING

JV0600K

64

Jig Saw
Gergaji Jig
线锯机





- **Toolless blade change system for fast blade installation and removal**
  Penukaran bilah tanpa alat untuk pemasangan bilah cepat
  无需工具更换刀片，可快速安装和拆卸刀片

Standard Equipment: Jig Saw Blade, Hex Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**650W**
Capacity Kapasiti 能力	**Wood: 90mm (3-1/2")** **Steel: 10mm (3/8")**
Length of Stroke Panjang Strok 冲程长度	**23mm (7/8")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**500 - 3,100**
Dimensions (L x W x H) Dimensi 体积	**236x77x199mm** **(9-1/4"x3"x7-7/8")**
Net Weight Berat Bersih 淨重	**2.4kg (5.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

4327M

64

Jig Saw
Gergaji Jig
线锯机





- **High power and Lightweight**
  Kuasa tinggi dan Ringan
  高功率和轻量

Standard Equipment: Jig Saw Blade, Hex Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**450W**
Capacity Kapasiti 能力	**Wood: 40mm (1-9/16")** **Steel: 6mm (1/4")**
Length of Stroke Panjang Strok 冲程长度	**18mm (11/16")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**500 - 3,100**
Dimensions (L x W x H) Dimensi 体积	**224x77x197mm** **(8-7/8"x3"x7-3/4")**
Net Weight Berat Bersih 淨重	**1.8kg (4.0lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

4327

64

Jig Saw
Gergaji Jig
线锯机





- **High power and Lightweight**
  Kuasa tinggi dan Ringan
  高功率和轻量

Standard Equipment: Jig Saw Blade, Hex Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**450W**
Capacity Kapasiti 能力	**Wood: 65mm (2-9/16")** **Steel: 6mm (1/4")**
Length of Stroke Panjang Strok 冲程长度	**18mm (11/16")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**500 - 3,100**
Dimensions (L x W x H) Dimensi 体积	**224x77x197mm** **(8-7/8"x3"x7-3/4")**
Net Weight Berat Bersih 淨重	**1.9kg (4.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

4300BV

51

Jig Saw
Gergaji Jig
线锯机





- **Robust construction and strength to cut through a wide range of materials**
  Pembinaan yang kukuh dengan kekuatan untuk memotong pelbagai bahan
  坚固的结构和强度可切割各种材料

Standard Equipment: Jig saw blade set, Rip Fence (Guide Rule), Circular Guide, Hex Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**390W**
Capacity Kapasiti 能力	**Wood: 55mm (2-1/8")** **Steel: 6mm (1/4")**
Length of Stroke Panjang Strok 冲程长度	**26mm (1")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0-3,100**
Overall Length Panjang Keseluruhan 总长度	**225mm (8-7/8")**
Net Weight Berat Bersih 淨重	**2.5kg (5.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

JR3050T

303

Recipro Saw
Gergaji Resipro
往复锯





- **Ideal for framers, carpenters, electricians, plumbers and general construction**
  Untuk framers, tukang kayu, juruelektrik, tukang paip dan pembinaan umum
  木工，木匠，电工，水管工和一般建筑的理想选择

Standard Equipment: Recipro Saw Blades 3pcs (No. 21, 22, 23)

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,010W**
Length of Stroke Panjang Strok 冲程长度	**28mm (1-1/8")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 2,800**
Capacity Kapasiti 能力	**Pipe : 130mm (3-1/2")** **Wood: 255mm (10")**
Overall Length Panjang Keseluruhan 总长度	**452mm (17-3/4")**
Net Weight Berat Bersih 淨重	**3.3kg (7.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

SAWING

JR3051TK

303

Recipro Saw
Gergaji Resipro
往复锯



- **Powerful 1,200W motor for improved performance**
  Meningkatkan prestasi dengan motor 1,200W
  强大的1,200W电机可提高性能



Standard Equipment: Recipro Saw Blades 3pcs (No. 21, 22, 23)

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,200W**
Length of Stroke Panjang Strok 冲程长度	**30mm (1-3/16")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 3,000**
Capacity Kapasiti 能力	**Pipe: 130mm (5-1/8")** **Wood: 255mm (10")**
Dimensions (L x W x H) Dimensi 体积	**447x97x176mm** **(17-5/8"x3-13/16"x6-15/16")**
Net Weight Berat Bersih 净重	**3.2 - 3.3kg (7.1 - 7.3lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

JR3061T

303

Recipro Saw
Gergaji Resipro
往复锯



- **Higher cutting efficiency & Excellent durability**
  Kecekapan pemotongan yang lebih tinggi dan ketahanan yang sangat baik
  更高的切割效率和卓越的耐用性



Standard Equipment: Recipro Saw Blades 3pcs (No. 21, 22, 23)

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,250W**
Length of Stroke Panjang Strok 冲程长度	**32mm (1-1/4")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 3,000**
Capacity Kapasiti 能力	**Pipe: 130mm (5-1/8")** **Wood: 255mm (10")**
Dimensions (L x W x H) Dimensi 体积	**487x95x177mm** **(19-3/16"x3-3/4"x7")**
Net Weight Berat Bersih 净重	**3.8kg (8.4lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

JR3070CT

303

Recipro Saw
Gergaji Resipro
往复锯



- **Anti-Vibration Technology for 2X Less Vibration**
  Mengurangkan getaran 2X dengan teknologi anti getaran
  2倍减振的防振技术



Standard Equipment: Recipro Saw Blades 3pcs (No. 21, 22, 23)

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,510W**
Length of Stroke Panjang Strok 冲程长度	**32mm (1-1/4")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 2,800**
Capacity Kapasiti 能力	**Pipe : 130mm (5-1/8")** **Wood: 255mm (10")**
Overall Length Panjang Keseluruhan 总长度	**485mm (19-1/8")**
Net Weight Berat Bersih 净重	**4.6kg (10lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

SJ401

Scroll Saw
Gergaji Scroll
平台式線鋸機



- **Bevel cuts up to 45° to the left and 15° to the right**
  Pemotongan serong sehingga 45° ke kiri
  dan 15° ke kanan
  斜角向左切割45°，向右切割15°



Standard Equipment: Saw blade x6, Hex Wrench, Blade Change Rod

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**50W**
Capacity Kapasiti 能力	**Thickness of cut : 50mm (2")** **Throat : 406mm (16")**
Length of Stroke Panjang Strok 冲程长度	**18mm (11/16")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**400-1,600**
Overall Length Panjang Keseluruhan 总长度	**600mm (23-5/8")**
Net Weight Berat Bersih 净重	**14kg (30.87lbs)**

LB1200F

Band Saw
Gergaji Band
带锯



- **High/ low speed selection for excellent results in both hard and soft wood**
  Pemilihan kelajuan tinggi/ rendah untuk kayu keras dan lembut
  高/低速选择，切割硬木和软木



Standard Equipment: Band Saw Blades, Rip Fence, Miter Gauge, Push Stick, Nozzle, Hex Wrench, Band Saw Stand

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**900W**
Capacity Kapasiti 能力	**Thickness of cut : 165mm (6-1/2")** **Throat : 305mm (12")**
Blade Speed Kelajuan Bilah 锯片速度	**High: (50Hz)800 (60Hz)1,000m** **((50 Hz)2,624 (60 Hz) 3,280ft)/ min** **Low: (50Hz)400 (60Hz)500m** **((50Hz)1,312 (60Hz) 1,640ft)/ min**
Dimensions (L x W x H) Dimensi 体积	**615x775x1,600mm** **(24-1/4"x30-1/2"x63")**
Net Weight Berat Bersih 净重	**82kg (181.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

PLANING
ROUTERING

Mengetam | Tanggam 刨削 | 雕刻



KP0810 82mm (3-1/4")

132

Power Planer
Planer Elektrik
电刨



- **Powerful & lightweight**
  Berkuasa & ringan
  强力与轻量



Standard Equipment: Blade Gauge, Depth Guide, Guide Rule, Planer Blade, Socket Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**850W**
Planing Width Lebar Pelan 刨削宽度	**82mm (3-1/4")**
Planing Depth Kedalaman Pelan 刨削深度	**4mm (5/32")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**16,000**
Dimensions (L x W x H) Dimensi 体积	**290x168x176mm (11-3/8"x6-5/8"x6-15/16")**
Net Weight Berat Bersih 淨重	**3.3kg (7.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

KP0800X 82mm (3-1/4")

411

Power Planer
Planer Elektrik
电刨



- **High power & lightweight**
  Kuasa tinggi & ringan
  高功率与轻量



Standard Equipment: Planer Blade, Blade Gauge, Guide Rule, Socket Wrench, Dust Nozzle

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**620W**
Planing Width Lebar Pelan 刨削宽度	**82mm (3-1/4")**
Planing Depth Kedalaman Pelan 刨削深度	**2.5mm (3/32")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**17,000**
Dimensions (L x W x H) Dimensi 体积	**285x158x158mm (11-1/4"x6-1/4"x6-1/4")**
Net Weight Berat Bersih 淨重	**2.8kg (6.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

N1900B 82mm (3-1/4")

51

Power Planer
Planer Elektrik
电刨



- **V-groove on base for easy chamfer cutting**
  V-groove pada dasar untuk pemotongan melencong mudah
  底座上的V型槽，便于倒角切割



Standard Equipment: Sharpening Holder Assembly, Blade Gauge, Socket Wrench, Planer Blade, Guide Rule

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**580W**
Planing Width Lebar Pelan 刨削宽度	**82mm (3-1/4")**
Planing Depth Kedalaman Pelan 刨削深度	**1mm (1/32")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**16,000**
Overall Length Panjang Keseluruhan 总长度	**290mm (11-3/8")**
Net Weight Berat Bersih 淨重	**2.8kg (6.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

1911B 110mm (4-3/8")

106

Power Planer
Planer Elektrik
电刨



- **Powerful motor in compact and lightweight body**
  Motor berkuasa badan padat dan ringan
  马达功能强大，体积小巧轻便



Standard Equipment: Sharpening Holder Assembly, Blade Gauge, Socket Wrench, Planer Blade

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**840W**
Planing Width Lebar Pelan 刨削宽度	**110mm (4-3/8")**
Planing Depth Kedalaman Pelan 刨削深度	**2mm (1/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**16,000**
Overall Length Panjang Keseluruhan 总长度	**355mm (14")**
Net Weight Berat Bersih 淨重	**4.1kg (9.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

PLANING | ROUTERING

1805N 155mm (6-1/8")

153

Power Planer
Planer Elektrik
电刨



- **Rugged aluminum housing and easy depth settings**
  Casing aluminium yang lasak dan penetapan kedalaman yang mudah
  坚固的铝外壳和简单的深度设置



Standard Equipment: Sharpening Holder Assembly, Blade Gauge, Socket Wrench, Planer Blade

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,140W**
Planing Width Lebar Pelan 刨削宽度	**155mm (6-1/8")**
Planing Depth Kedalaman Pelan 刨削深度	**2mm (1/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**15,000**
Overall Length Panjang Keseluruhan 总长度	**445mm (17-1/2")**
Net Weight Berat Bersih 净重	**7.9kg (17.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

2012NB 304mm (12")

153

Planer
Planer Elektrik
电刨



- **Powerful 1,650W motor for improved performance**
  Motor 1,650W yang berkuasa meningkatkan prestasi
  功率强劲的1,650W马达提高了性能



Standard Equipment: Socket Wrench, Hex Wrench, Magnetic holder x2

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,650W**
Cutting Width Lebar Pelan 刨削宽度	**304mm (12")**
Cutting Depth Kedalaman Pelan 刨削深度	**Cutting width 0-150mm: 3mm (1/8")** **Cutting width 150-240mm : 1.5mm (1/16")**
Feed Rate (min) Kadar Suapan 进料速度	**8.5m (27.9ft)**
Table Size (W x L) Saiz Meja 工作台尺寸	**304 x 771mm (12" x 30-3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Panjang Keseluruhan 总长度	**483x771x401mm** **(19"x30-3/8"x15-13/16")**
Net Weight Berat Bersih 净重	**27.1 - 27.6kg (59.7 - 60.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

3501N

153

Groove Cutter
Pemotong alur
沟锯



- **Powerful motor, easy depth adjustment**
  Motor berkuasa, pelarasan kedalaman yang mudah
  强大的马达，容易调整深度



Standard Equipment: Saw Blade (A-87507), Shiplapping Scale, Rip Fence (Guide Rule), Dressing Stone, Wrench x2, Screwdriver, Cutter Blade

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,160W**
Max Cutter Blade Size Saiz Bilah Maksimum 最大锯片尺寸	**Dia. x Width:** **120x36mm (4-3/4"x1-3/8")**
Max Cutting Depth Kedalaman Pemotongan Maksimum 最大切割深度	**Cutter/ Saw: 30mm (1-1/8")/** **65 mm (2-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**6,500**
Overall Length Panjang Keseluruhan 总长度	**365mm (14-3/8")**
Net Weight Berat Bersih 净重	**7.2kg (15.8lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

PJ7000

459

Plate Joiner
Mesin Kerja Kayu
木工接合机



- **Large and easy-to-operate cam locks for fence adjustments**
  Pelarasan pagar yang mudah
  简易栅栏调节



Standard Equipment: Cutter Blade, Angle Guide, Dust Bag, Set Plate, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**701W**
Blade Diameter Diameter Bilah 锯片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**302x139x145mm** **(11-7/8"x5-1/2"x5-3/4")**
Net Weight Berat Bersih 净重	**2.8kg (6.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**







PLANING | ROUTERING

3901

411

Plate Joiner
Mesin Kerja Kayu
木工接合机



- **Designed for making strong plate joints fast**
  Direka untuk penyambungan rata
  用于快速制作坚固的平板接头

Standard Equipment: Cutter Blade, Angle Guide, Dust Bag, Set Plate, Lock Nut Wrench





Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**590W**
Blade Diameter Diameter Bilah 锯片直径	**100mm (4")**
Max Cutting Depth Kedalaman Pemotongan Maksimum 最大切割深度	**20mm (3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Overall Length Panjang Keseluruhan 总长度	**307mm (12-1/16")**
Net Weight Berat Bersih 淨重	**3.0kg (6.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

RT0700C / X2 6mm (1/4"), 8mm (3/8")


411

Trimmer
Pemangkas
修边雕刻机



- **Powerful 710W motor for improved performance**
  Motor berkuasa 710W untuk prestasi yang lebih baik
  强大710W马达提高了性能

Standard Equipment:
RT0700C: Collet Cone, Trimmer Base Assembly, Straight Guide, Dust Nozzle, Wrench x2
RT0700X2: Collet Cone, Trimmer Base Assembly, Straight Guide, Dust Nozzle, Wrench x2, Side Grip, Templet Guide, Tilt Base Assembly, Plunge Base Assembly, Tool Bag







Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**710W**
Collet Capacity Kapasiti Collet 夹头直径	**6mm, 8mm or 1/4", 3/8"**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**10,000 - 30,000**
Dimensions (L x W x H) Dimensi 体积	**89x89x200mm (3-1/2"x3-1/2"x7-7/8")**
Net Weight Berat Bersih 淨重	**1.8 - 2.7kg (3.9 - 6.0lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

3709 6mm (1/4")

411

Trimmer
Pemangkas
修边雕刻机



- **530W motor for smooth trimming**
  530W motor untuk pemangkasan yang licin
  530W马达提供平滑的修剪

Standard Equipment: Collet Cone, Trimmer Guide, Straight Guide Assembly, Templet Guide, Straight Bit, Chip Deflector, Wrench x2





Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**530W**
Collet Capacity Kapasiti Collet 夹头直径	**6mm or 1/4"**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**30,000**
Dimensions (L x W x H) Dimensi 体积	**82x90x199mm (3-1/4"x3-1/2"x7-8")**
Net Weight Berat Bersih 淨重	**1.5kg (3.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

RP0900 6mm (1/4"), 8mm (3/8")

106

Router (Plunge type)
Pemangkas
雕刻机



- **Oversized ball bearing construction for longer tool life**
  Konstruksi galas bebola untuk memanjangkan hayat alat
  超大滚珠轴承结构，延长工具寿命

Standard Equipment: Straight Guide, Straight Bit, Collet cone x2, Wrenches





Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**900W**
Collet Capacity Kapasiti Collet 夹头直径	**6mm, 8mm or 1/4", 3/8"**
Plunge Capacity Kapasiti Plunge 能力	**0 - 35mm (0 - 1-3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**27,000**
Dimensions (L x W x H) Dimensi 体积	**110x256x217mm (4-5/16"x10-3/32"x8-17/32")**
Net Weight Berat Bersih 淨重	**2.7kg (6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

RP2301FC 12mm (1/2")


203

Router (Plunge type)
Pemangkas
雕刻机



- **Powerful 2,100W motor for the most demanding applications**
  Motor 2,100W berkuasa untuk aplikasi yang paling mencabar
  功能强大2,100W马达，适用于要求苛刻的应用

Standard Equipment: Straight Guide, Collet Cone, Wrench, Screw M6x135, Straight Bit 1/2" (D-07901)





Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,100W**
Collet Capacity Kapasiti Collet 夹头直径	**12mm or 1/2"**
Plunge Capacity Kapasiti Plunge 能力	**0 - 70mm (0 - 2-3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**9,000 - 22,000**
Dimensions (L x W x H) Dimensi 体积	**155x294x312mm (6-1/8"x11-5/8"x12-1/4")**
Net Weight Berat Bersih 淨重	**6.1kg (13.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**4.0m (13.1ft.)**

PLANING | ROUTERING

RP1803 12mm (1/2")

203

Router
Pemangkas
雕刻机

- **Deep 0 - 70mm (0" - 2-3/4") plunge depth capacity for easy penetration into work piece**

NEW BARU 新



Standard Equipment: Straight Guide, Collet Sleeve, Collet Cone, Wrench, Templet Guide

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,650W**
Collet Capacity Kapasiti Collet 夹头直径	**12mm (1/2")**
Plunge Capacity Kapasiti Plunge 能力	**0 - 70mm (0 - 2-3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**22,000**
Dimensions (L x W x H) Dimensi 体积	**155x294x312mm (6-1/8x11-5/8x12-1/4")**
Net Weight Berat Bersih 净重	**6.2kg (13.7lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

RP1801 12mm (1/2")

203

Router (Plunge type)
Pemangkas
雕刻机



- **Electric brake for increased operator safety**
  Brake elektrik untuk pengguna keselamatan
  电子自动刹车



Standard Equipment: Straight Guide, Collet Cone, Wrench, Screw M6x135, Template Guide

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,650W**
Collet Capacity Kapasiti Collet 夹头直径	**12mm or 1/2"**
Plunge Capacity Kapasiti Plunge 能力	**0 - 70mm (0 - 2-3/4")**
Base Dia. Diameter Pangkalan 底座直径	**170mm (6-11/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**22,000**
Dimensions (L x W x H) Dimensi 体积	**155x294x312mm (6-1/8"x11-5/8"x12-1/4")**
Net Weight Berat Bersih 净重	**6kg (13.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**4.0m (13.1ft.)**

3612BR 12mm (1/2")

153

Router (Plunge type)
Pemangkas
雕刻机



- **Conveniently located plunge lock lever for efficient operation**
  Pelarasan tuil yang mudah untuk operasi yang cekap
  便利的插入式锁定杆可实现高效操作



Standard Equipment: Straight Guide, Templet Guide, Trimmer Guide, Guide Holder, Collet Sleeve (6mm or 1/4"), Collet Sleeve (8mm or 3/8"), Straight Bit (Carbide-Tipped) D-07901, Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,600W**
Collet Capacity Kapasiti Collet 夹头直径	**12mm or 1/2"**
Plunge Capacity Kapasiti Plunge 能力	**0 - 65mm (0 - 2-9/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**23,000**
Dimensions (L x W x H) Dimensi 体积	**160x276x287mm (6-5/16"x10-7/8"x11-5/16")**
Net Weight Berat Bersih 净重	**5.5kg (12.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

3600H 12mm (1/2")

153

Router
Pemangkas
雕刻机



- **D-handle design with locking trigger switch for comfort during continuous operation**
  Pemegang-D dengan suis pencetus berkunci untuk keselesaan semasa operasi berterusan
  带锁定扳机开关的D型手柄设计可确保连续操作时的舒适性



Standard Equipment: Trimmer Guide, Straight Guide Assembly, Templet Guide, Collet Sleeve (6mm or 1/4"), Collet Sleeve (8mm or 3/8"), Wrench, Straight Bit (Carbide-Tipped) D-07901

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,500W**
Collet Capacity Kapasiti Collet 夹头直径	**12mm or 1/2"**
Base Dia. Diameter Pangkalan 底座直径	**160mm (6-1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**24,000**
Overall Height Panjang Keseluruhan 总长度	**210mm (8-1/4")**
Net Weight Berat Bersih 净重	**4.4kg (9.8lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

4403 6mm (1/4")

411

Sash Router
Pemangkas Sash
窗扇雕刻机



- **Large transparent chip guard for operator's safety**
  Pengawal cip telus yang besar untuk keselamatan pengguna
  大型透明芯片防护罩保证操作者的安全



Standard Equipment: Collet cone (6mm or 1/4"), Drill Point Sash Router Bit (D-16972), Angle Gauge, Wrench x2, Oil supply

Continuous rating input Input Kuasa Berterusan 额定输入功率	**530W**
Capacity Kapasiti 能力	**Collet: 6mm or 1/4"**
Max Width of Work Lebar Kerja Maksimum 最大工作宽度	**123mm (4-7/8")**
Max Width of Work (45°) Lebar Kerja Maksimum 最大工作宽度	**77mm (3")**
Max Height of Work Ketinggian Kerja Maksimum 最大工作高度	**185mm (7-1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**30,000**
Dimensions (L x W x H) Dimensi 体积	**327x350x355mm (12-7/8"x13-13/16"x14")**
Net Weight Berat Bersih 净重	**16kg (35.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**



OTHERS

Lain-lain 其他

AF506

Pneumatic Brad Nailer

Penembak Paku Brad Pneumatik
气钉枪



- **Lightweight for reduced operator fatigue**
  Ringan untuk mengurangkan keletihan pengguna
  轻量不易引起疲劳

Standard Equipment: Safety Goggles, Nose Adapter, Oil



Capacity Kapasiti 能力	**Length: 15 - 50mm (5/8" - 2")** **Gauge: 18Ga**
Operating Pressure Tekanan Beroperasi 使用气压	**0.49 - 0.83MPa (70 - 120PSI)**
Magazine Capacity Bilangan Staples 装钉个数	**100**
Compressed Air Udara Mampat 压缩空气	**Driver stroke: 85.5mm (3-3/8")** **Cylinder bore diameter: 28mm (1-1/8")**
Dimensions (L x W x H) Dimensi 体积	**250x70x256mm** **(9-7/8"x2-3/4"x10-1/8")**
Net Weight Berat Bersih 淨重	**1.3kg (2.9lbs.)**

Accessories (optional)

Description	Size	Pcs/ Box	Part No.
Brad Nail 15mm (5/8")	F15	5,000	B-04307
Brad Nail 20mm (3/4")	F20	5,000	B-04313
Brad Nail 25mm (1")	F25	5,000	B-04329
Brad Nail 30mm (1-3/16")	F30	5,000	B-04335
Brad Nail 35mm (1-3/8")	F35	5,000	B-04357

AF353

Pneumatic Pin Nailer

Mesin Pemaku Pneumatik
气钉枪



- **Lightweight for reduced operator fatigue**
  Ringan untuk mengurangkan keletihan pengguna
  轻量不易引起疲劳

Standard Equipment: Safety Goggles, Nose Adapter, Hex Wrench, Oil



Capacity Kapasiti 能力	**Length: 15 - 35mm (5/8" - 1-3/8")** **Gauge: 23Ga**
Operating Pressure Tekanan Beroperasi 使用气压	**0.45 - 0.69MPa (65 - 100PSI)**
Magazine Capacity Bilangan Staples 装钉个数	**130**
Dimensions (L x W x H) Dimensi 体积	**208x66x191mm** **(8-3/16"x2-5/8"x7-1/2")**
Net Weight Berat Bersih 淨重	**0.9kg (2lbs.)**

Accessories (optional)

Description	Size	Pcs/ Box	Part No.
Pin Nail 18mm (11/16")	P18	10,000	F-31825
Pin Nail 25mm (1")	P25	10,000	F-31838
Pin Nail 30mm (1-3/16")	P30	10,000	F-31841
Pin Nail 35mm (1-3/8")	P35	10,000	F-31854

*Order upon request

AF601

Pneumatic Finish Nailer

Mesin Pemaku Pneumatik
气钉枪



- **Lightweight for reduced operator fatigue**
  Ringan untuk mengurangkan keletihan pengguna
  轻量不易引起疲劳

Standard Equipment: Safety Goggles, Nose Adapter, Oil



Capacity Kapasiti 能力	**Length: 25 - 64mm (1" - 2-1/2")** **Gauge: 16Ga**
Operating Pressure Tekanan Beroperasi 使用气压	**0.49 - 0.83MPa (70 - 120PSI)**
Magazine Capacity Bilangan Staples 装钉个数	**100**
Dimensions (L x W x H) Dimensi 体积	**304x95x297mm** **(12"x3-3/4"x11-3/4")**
Net Weight Berat Bersih 淨重	**1.7kg (3.8lbs.)**

Accessories (optional)

Description	Pcs/ Box	Part No.	Description	Pcs/ Box	Part No.
Finish Nail 25mm (1")	2,000	F-33922	Finish Nail 45mm (1-3/4")	2,000	F-33980
Finish Nail 30mm (1-3/16")	2,000	F-33935	Finish Nail 50mm (2")	2,000	F-33993
Finish Nail 32mm (1-1/4")	2,000	F-33948	Finish Nail 57mm (1-1/4")	2,000	F-34001
Finish Nail 35mm (1-3/8")	2,000	F-33951	Finish Nail 60mm (2-3/8")	2,000	F-34014
Finish Nail 38mm (1-1/2")	2,000	F-33964	Finish Nail 64mm (2-1/2")	2,000	F-34027
Finish Nail 40mm (1-9/16")	2,000	F-33977			

*Order upon request

AF635

Pneumatic Finish Nailer

Mesin Pemaku Pneumatik
气钉枪



- **Lightweight for reduced operator fatigue**
  Ringan untuk mengurangkan keletihan pengguna
  轻量不易引起疲劳

Standard Equipment: Safety Goggles, Nose Adapter, Oil



Capacity Kapasiti 能力	**Length: 32 - 64mm (1-1/4" - 2-1/2")** **Gauge: 15Ga**
Operating Pressure Tekanan Beroperasi 使用气压	**0.49 - 0.83MPa (70 - 120PSI)**
Magazine Capacity Bilangan Staples 装钉个数	**100**
Dimensions (L x W x H) Dimensi 体积	**339x100x309mm** **(13-3/8"x3-15/16"x12-1/8")**
Net Weight Berat Bersih 淨重	**1.8kg (4lbs.)**

Accessories (optional)

Description	Pcs/ Box	Part No.
Finish Nail 32mm (1-1/4")	4,000	F-31960
Finish Nail 38mm (1-1/2")	4,000	F-31973
Finish Nail 45mm (1-3/4")	4,000	F-31986
Finish Nail 50mm (2")	4,000	F-31999
Finish Nail 57mm (1-1/4")	4,000	F-32007
Finish Nail 64mm (2-1/2")	4,000	F-32010

*Order upon request

OTHERS

AT638A

Narrow Crown Stapler
Mesin Pemaku Pneumatik
气钉枪



- **Lightweight for reduced operator fatigue**
  Ringan untuk mengurangkan keletihan pengguna
  轻量不易引起疲劳



Standard Equipment:
Safety Goggles, Nose Adapter, Oil

Capacity Kapasiti 能力	**Length: 13 - 38mm (1/2" - 1-1/2")** **Gauge: 15Ga** **Width: 5.7mm**
Operating Pressure Tekanan Beroperasi 使用气压	**0.49 - 0.83MPa (70 - 120PSI)**
Magazine Capacity Bilangan Staples 装钉个数	**100**
Dimensions (L x W x H) Dimensi 体积	**230x75x251mm** **(9"x2-15/16"x9-7/8")**
Net Weight Berat Bersih 净重	**1.2kg (2.7lbs.)**



Heat Gun Accessories (Optional)
Pistol Udara Panas 热风枪

Shape	Part No.
Glass protection nozzle	PR00000028
Wide-slot nozzle	PR00000029
Reflector nozzle	PR00000030
Reduction nozzle 20	PR00000031
Overlap welding nozzle	PR00000032
Solder sleeves reflector	PR00000033

Shape	Part No.	
Welding nozzle	PR00000034	
Pressure roller	PR00000035	
Welding rods	ABS	PR00000036
	HDPE	PR00000037
	PP	PR00000038
Speed welding nozzle	PR00000039	
Scraper	PR00000040	
Scraper set	PR00000041	
Scraper	PR00000042	

HG6530VK

Heat Gun
Pistol Udara Panas
热风枪



- **3-speed blower settings for greater versatility**
  Kawalan kelajuan 3 tahap untuk pelbagai aplikasi
  3速度控制适合多种用途



Standard Equipment: Glass Protection Nozzle, Reflector Nozzle, Reduction Nozzle, Wide Slot Nozzle

Air Temperature (°C) Suhu Udara 气温	**50 - 650**
Air Flow Aliran Udara 空气流量	**Stage 1: 500 L/min** **Stage 2: 280 L/min** **Stage 3: 550 L/min**
Dimensions (L x W x H) Dimensi 体积	**257x85x206mm** **(10-1/8"x3-3/8"x8-1/8")**
Net Weight Berat Bersih 净重	**0.72kg (1.6lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

OTHERS





HG6031VK

Heat Gun
Pistol Udara Panas
热风枪



- **9-temperature settings (50 - 600°C) for a variety of applications**
  9 tetapan suhu (50 - 600°C) sesuai untuk pelbagai aplikasi
  9个温度设定（50 - 600° C）适合于各种用途

Standard Equipment: Glass Protection Nozzle, Reflector Nozzle, Reduction Nozzle, Wide Slot Nozzle



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,800W**
Air Temperature (°C) / Flow (L/min) Suhu Udara 气温	**Switch 1: 50 - 400 / 250** **Switch 2: 100 - 600 / 500**
Dimensions (L x W x H) Dimensi 体积	**257x85x206mm** **(10-1/8"x3-3/8"x8-1/8")**
Net Weight Berat Bersih 净重	**0.67kg (1.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

HG5030K

Heat Gun
Pistol Udara Panas
热风枪



- **2 temperature settings (350 and 500°C)**
  2 tetapan suhu (350 dan 500°C)
  2个温度设定 (350和500°C)

Standard Equipment: Glass Protection Nozzle, Reflector Nozzle, Reduction Nozzle, Wide Slot Nozzle



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,600W**
Air Temperature (°C) / Flow (L/min) Suhu Udara 气温	**Switch 1: 350 / 300** **Switch 2: 500 / 500**
Dimensions (L x W x H) Dimensi 体积	**233x80x208mm** **(9-1/8"x3-1/8"x8-3/16")**
Net Weight Berat Bersih 净重	**0.56kg (1.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

SK104Z

Cross Line Laser
Laser Garis Salib
十字线激光



- **Accuracy +/- 3mm @ 10m**
  Ketepatan +/- 3mm @ 10m
  精确度+/- 3mm @ 10m

Standard Equipment: Wall Mount Bracket, Target Plate, AA Battery, Pouch with strap



Measuring Range Jarak Mengukur 测量范围	**Up to: 15m** **w/ detector up to: 60m**
Leveling Accuracy Menunjukkan Ketepatan 指示精确度	**±3mm/ 10m**
Self-leveling Range Julat Indikasi Menegak 垂直指示范围	**4+-1°**
Laser Fan Angle Sudut Peminat Laser 激光扇角	**Horizontal: 180°** **Vertical: 180°**
Number of Laser Bilangan Garisan Laser 激光线数量	**points: 4** **lines: 2**
Laser Type Jenis Laser 激光类型	**Laser class 2: 635nm**
Tripod Thread Tripod 脚架	**1/4"**
Protection Class Tahap Perlindungan 保护等级	**IP54**
Net Weight Berat Bersih 净重	**0.53kg (1.17lbs)**

LD030P

Laser Distance Measure
Langkah Jarak Laser
激光测距



- **Measuring distance operating range up to 30m**
  Mengukur jarak operasi jarak sehingga 30m
  测量距离可达30米



Measuring Range Jarak Mengukur 测量范围	**0.2-30m**
Typical Measuring Tolerance Toleransi Mengukur Biasa 典型的测量公差	**±2.0mm/ 10m**
Max Measuring Tolerance Toleransi Mengukur Maksimum 最大测量公差	**±3.0mm/ 10m**
Diameter of Laser Point Diameter Titik Laser 激光点的直径	**6mm/ 10m**
Laser Type Jenis Laser 激光类型	**Laser class 2: 635nm**
Dimensions (H x D x W) Dimensi 体积	**117x53x25mm** **(4.5"x2.14"x1")**
Net Weight Berat Bersih 净重	**0.1kg (0.22lbs)**

OTHERS

LD050P

Laser Distance Measure
Langkah Jarak Laser
激光测距



- **Measuring distance operating range up to 50m**
  Mengukur jarak operasi jarak sehingga 50m
  测量距离可达50米



Standard Equipment: Pouch

Measuring Range Jarak mengukur 测量范围	**0.05-50m**
Power Supply Bekalan Kuasa 电源	**Cell battery : AAA 1.5V x 2pcs**
Net Weight Berat Bersih 淨重	**0.1kg (0.22lbs)**

LD080P / LD080PI

Laser Distance Measure
Langkah Jarak Laser
激光测距



- **Measuring distance operating range up to 80m**
  Mengukur jarak operasi jarak sehingga 80m
  测量距离可达80米

LD080P





LD080PI
Inclination Sensor

Standard Equipment: Carrying Strap, Pouch

Measuring Range Jarak mengukur 测量范围	**0.05-80m**
Power Supply Bekalan Kuasa 电源	**Cell battery : AAA 1.5V x 2pcs**
Net Weight Berat Bersih 淨重	**0.14kg (0.31lbs)**

UB1103

303

Blower
Mesin Blower
吹风机



- **Two tools in one; quickly converts to a vacuum for added versatility**
  Alat 2 dalam 1, vakum dan blower untuk fleksibiliti tambahan
  一机2用，集尘与吹风




Standard Equipment: Nozzle, Dust Bag

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**600W**
Max Air Volume Isipadu Angin Maksimum 最大风量	**0 - 4.1m³/min**
Max Air Velocity Velositi Angin Maksimum 最大风速	**0 - 91m/s**
Air Pressure Tekanan Udara 气压	**0 - 5.7kPa**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 16,000**
Dimensions (L x W x H) Dimensi 体积	**479x185x178mm (18-7/8"x7-1/4"x7")**
Net Weight Berat Bersih 淨重	**1.9 - 2.2kg (4.3 - 4.8lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

HS100

Hammer Tacker
Alat Manual Memaku Mesin
手動工具敲釘機





Capacity Kapasiti 能力	**Width: 12mm** **Length: 6 - 10mm**
Magazine Capacity Bilangan Staples 装钉个数	**144**
Dimensions (L x W x H) Dimensi 体积	**281mm**
Net Weight Berat Bersih 淨重	**0.5kg**

Accessories (optional)

Description	Length	Pcs/ Box	Part No.
Staple CT10M	10mm (3/8")	20,160	F-81772

*Order upon request

OUTDOOR POWER EQUIPMENT

Alat Berkebun 园艺工具



UC3551A 350mm (14") | UC4051A 400mm (16")

153

Electric Chain Saw
Gergaji Rantai
电链锯



- **Fast and efficient cutting**
  Pemotongan cepat dan cekap
  快速高效的切割



Standard Equipment: Saw Chain, Guide Bar, Guide Bar Cover, Hook Complete

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,800W**
Chain Speed per Minute Kelajuan Rantai 链条速度	**870m (2,900ft)**
Guide Bar Length Panjang Bar Panduan 导板长度	**350mm (14") UC3551A** **400mm (16") UC4051A**
Saw Chain Rantai 链条	**Pitch : 9.5mm (3/8")** **Gauge: 1.3mm (0.050")**
Dimensions (L x W x H) Dimensi 体积	**505x200x220mm** **(19-7/8"x7-7/8"x8-5/8")**
Net Weight Berat Bersih 淨重	**5.5kg (12.1lbs) UC3551A** **5.6kg (12.3lbs) UC4051A**
Power Supply Cord Kabel Wayar 电源线	**0.3m (0.98ft)**

UC3541A 350mm (14") | UC4041A 400mm (16")

132

Electric Chain Saw
Gergaji Rantai
电链锯



- **Zero emissions and reduced maintenance**
  Tanpa perlepasan asap & penyelenggaraan rendah
  无排气及降低保养少维护



Standard Equipment: Saw Chain, Guide Bar, Guide Bar Cover, Hook Complete

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,800W**
Chain Speed per Minute Kelajuan Rantai 链条速度	**870m (2,900ft)**
Guide Bar Length Panjang Bar Panduan 导板长度	**350mm (14") UC3541A** **400mm (16") UC4041A**
Saw Chain Rantai 链条	**Pitch : 9.5mm (3/8")** **Gauge: 1.1mm (0.043")/** **1.3mm (0.050")**
Dimensions (L x W x H) Dimensi 体积	**455x245x200mm** **(17-7/8"x9-5/8"x7-7/8")**
Net Weight Berat Bersih 淨重	**4.7 - 4.9kg (10.4 - 10.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**0.3m (0.98ft)**

5016B 405mm (16")

153

Electric Chain Saw
Gergaji Rantai
电链锯



- **Compact and lightweight design**
  Reka bentuk padat dan ringan
  小巧轻便的设计



Standard Equipment: Saw Chain, Oil supply 100ml, Socket Wrench, File, Screwdriver

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,300W**
Chain Speed per Minute Kelajuan Rantai 链条速度	**400m (1,310ft)**
Guide Bar Length Panjang Bar Panduan 导板长度	**405mm (16")**
Saw Chain Rantai 链条	**Pitch : 9.5mm (3/8")** **Gauge: 1.3" or 0.050"**
Overall Length Panjang Keseluruhan 总长度	**750mm (29-1/2")**
Net Weight Berat Bersih 淨重	**5.8kg (12.7lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

UH7580X 750mm (29-1/2")

419

Electric Hedge Trimmer
Pemangkas Tanaman Pagar
电篱笆修剪机



- **Powerful 670W motor**
  Motor berkuasa 670W
  强劲的670W电机



Standard Equipment: Blade Cover, Hook complete, Belt Hook

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**670W**
Blade Length Panjang Bilah 锯片长度	**750mm (29-1/2")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**3,000**
Tooth Spacing Selang Gigi 牙齿间隔	**18mm (11/16")**
Net Weight Keberatan 净重	**4.4kg (9.7lbs.)**
Power Supply Cord Kabel Wayar 电源线	**0.3m (0.98ft)**

OUTDOOR POWER EQUIPMENT





ELM4121 410mm (16-1/8")

Electric Lawn Mower
Mesin Pemotong Rumput
电手推割草机



- **Robust steel cutting deck for increased durability**
  Dek keluli memotong untuk meningkat ketahanan
  钢制切割台提高其耐用性



Standard Equipment: Blade, Wrench, Mulch Plug

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,600W**
Hole Diameter Diameter Lubang 孔直径	**8mm (5/16")**
Cutting Width Lebar Keratan 切割宽度	**410mm (16-1/8")**
Cutting Height Ketinggian Pemotongan 切割高度	**20 - 75mm (13/16" - 2-15/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,400**
Recommended mowing area up to Julat Memotong yang Disyorkan 推荐的割草范围	**600m²**
Grass Box Capacity Kapasiti Kotak Rumput 草箱容量	**50L**
Wheel Size Saiz Roda 轮片尺寸	**Front / Rear:** **156 / 200mm (6-1/8 / 7-7/8")**
Dimensions (L x W x H) Dimensi 体积	**1,465x530x905-1,135mm** **(57-3/4"x20-7/8"x35-5/8" - 44-3/4")**
Net Weight Berat Bersih 淨重	**17.5 - 19.1kg (38.6 - 42.1lbs.)**

ELM3720 370mm (14-1/2")

Electric Lawn Mower
Mesin Pemotong Rumput
电手推割草机



- **Stays upright for easy maintenance and cleaning**
  Penyelenggaraan dan pembersihan lebih mudah
  简单维护和清洁




Standard Equipment: Blade, Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,400W**
Hole Diameter Diameter Lubang 孔直径	**8mm (5/16")**
Cutting Width Lebar Keratan 切割宽度	**370mm (14-1/2")**
Cutting Height Ketinggian Pemotongan 切割高度	**20 - 55mm (13/16" - 2-3/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,400**
Recommended mowing area up to Julat Memotong yang Disyorkan 推荐的割草范围	**500m²**
Grass Box Capacity Kapasiti Kotak Rumput 草箱容量	**40L**
Wheel Size Saiz Roda 轮片尺寸	**Front / Rear: 139 / 178mm (5-1/2 / 7")**
Dimensions (L x W x H) Dimensi 体积	**1,330x415x890-1,120mm** **(52-3/8"x16-3/8"x35" - 44")**
Net Weight Berat Bersih 淨重	**11.6kg (25.6lbs.)**

ELM3711X 370mm (14-1/2")

Electric Lawn Mower
Mesin Pemotong Rumput
电手推割草机



- **Silent and NO emission**
  Senyap dan tanpa perlepasan asap
  低噪音，无排气



Standard Equipment: Blade

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,400W**
Cutting Width Lebar Keratan 切割宽度	**370mm (14-1/2")**
Cutting Height Ketinggian Pemotongan 切割高度	**20,40,55mm** **(13/16, 1-9/16, 2-3/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,900**
Recommended Mowing Area up to Julat memotong yang disyorkan 推荐的割草范围	**500m²**
Grass Box Capacity Kapasiti Kotak Rumput 草箱容量	**35L**
Dimensions (L x W x H) Dimensi 体积	**662x412x312mm** **(26"x16-1/2"x12-5/8")**
Net Weight Berat Bersih 淨重	**14.8kg (32.6lbs)**

ELM3320 330mm (13")

Electric Lawn Mower
Mesin Pemotong Rumput
电手推割草机

- **Stays upright for easy maintenance and cleaning**
  Penyelenggaraan dan pembersihan lebih mudah
  简单维护和清洁



Standard Equipment: Blade, Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,200W**
Hole Diameter Diameter Lubang 孔直径	**8mm (5/16")**
Cutting Width Lebar Keratan 切割宽度	**330mm (13")**
Cutting Height Ketinggian Pemotongan 切割高度	**20 - 55mm (13/16" - 2-3/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,400**
Recommended mowing area up to Julat Memotong yang Disyorkan 推荐的割草范围	**400m²**
Grass Box Capacity Kapasiti Kotak Rumput 草箱容量	**30L**
Wheel Size Saiz Roda 轮片尺寸	**Front / Rear: 139 / 178mm (5-1/2 / 7")**
Dimensions (L x W x H) Dimensi 体积	**1,230x380x870-1,110mm** **(48-1/2"x15"x34-1/4" - 43-3/4")**
Net Weight Berat Bersih 淨重	**10.2kg (22.5lbs.)**

OUTDOOR POWER EQUIPMENT











OUTDOOR POWER EQUIPMENT








HW1300

High Pressure Washer
Pembersih Tekanan Tinggi
高压清洗机



- **Eco-friendly for reduced water**
  Mesra alam dengan pengurangan kegunaan air
  环保与减少用水量

Standard Equipment: Trigger Gun, Vario-Power Spray Lance, Cyclone jet nozzle, Detergent Bottle, Cleaner Pin, Coupling Sleeve, High Pressure Hose 10m, Water Hose Connector, Foam Nozzle, Connector



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,800W**
Max Pressure Tekanan Maksimum 最大水压	**13MPa (130bar, 1,885PSI)**
Max Flow Rate Aliran Air Maksimum 最大流量	**420L/h**
Max Input Temperature Ketahanan Suhu Air 最大输入温度	**40°C (104°F)**
High Pressure Hose Length Hos Tekanan 高压软管长度	**10m (33ft.)**
Dimensions (L x W x H) Dimensi 体积	**292x358x830mm (11-1/2"x14-1/8"x32-3/4")**
Net Weight Berat Bersih 净重	**12.7kg (28.0lbs.)**
Power Supply Cord Kabel Wayer 电源线	**5.0m (16.4ft.)**

HW1200

High Pressure Washer
Pembersih Tekanan Tinggi
高压清洗机

- **Uses up to 80% less water than a garden hose while delivering up to 50X the pressure**
  Memberikan tekanan 50 kali ganda lebih daripada hos biasa dan menjimatkan 80% penggunaan air berbanding dengan hos biasa
  用水量比园艺胶管少80%，同时可提供高达50倍的水压力

Standard Equipment: Trigger Gun, Vario-Power Spray Lance, Cyclone jet nozzle, Detergent Bottle, Cleaner Pin, Coupling Sleeve, High Pressure Hose 10m, Water Hose Connector, Foam Nozzle, Connector



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,800W**
Max Pressure Tekanan Maksimum 最大水压	**12MPa (120bar, 1,740PSI)**
Max Flow Rate Aliran Air Maksimum 最大流量	**420L/h**
Max Input Temperature Ketahanan Suhu Air 最大输入温度	**40°C (104°F)**
High Pressure Hose Length Hos Tekanan 高压软管长度	**10m (33 ft.)**
Dimensions (L x W x H) Dimensi 体积	**292x358x830mm (11-1/2"x14-1/8"x32-3/4")**
Net Weight Berat Bersih 净重	**11.0kg (24.3lbs.)**
Power Supply Cord Kabel Wayer 电源线	**5.0m (16.4ft.)**

HW121

High Pressure Washer
Pembersih Tekanan Tinggi
高压清洗机

- **Made for frequent usage on larger, dirty or very dirty areas**
  Sesuai untuk pembersihan kerap di tempat yang luas dan kotoran yang degil
  适用于清洗较大的面积和极度肮脏的地方

Sementara stok masih ada 售完即止
WHILE STOCK LAST



Continuous Rating Input Kuasa 额定输入功率	**2,100W**
Max Pressure Tekanan Maksimum 最大水压	**13MPa (130bar, 1,885PSI)**
Max Flow Rate Aliran Air Maksimum 最大流量	**390L/h**
Motor Type Enjin 马达类型	**Induction**
Max Input Temperature Ketahanan Suhu Air 最大输入温度	**50°C (122°F)**
High Pressure Hose Length Hos Tekanan 高压软管长度	**8m (26.3ft.)**
Net Weight Berat Bersih 净重	**17.8kg (39.2lbs.)**

HW102

High Pressure Washer
Pembersih Tekanan Tinggi
高压清洗机

- **Lightweight and compact power washer for home**
  Ringan dan padat, sesuai untuk kegunaan rumah
  轻量家用高压清洗机



Continuous Rating Input Kuasa 额定输入功率	**1,300W**
Max Pressure Tekanan Maksimum 最大水压	**10MPa (100bar, 1,450PSI)**
Max Flow Rate Aliran Air Maksimum 最大流量	**360L/h**
Motor Type Enjin 马达类型	**Universal**
Max Input Temperature Ketahanan Suhu Air 最大输入温度	**50°C (122°F)**
High Pressure Hose Length Hos Tekanan 高压软管长度	**5m (16.4ft.)**
Net Weight Berat Bersih 净重	**5.8kg (12.8lbs.)**

M6501G / M6501B 6.5mm (1/4")

85

High Speed Drill
Gerudi Kelajuan Tinggi
高速钻

- **Ideal for drilling smaller holes in wood & steel**
  Sesuai untuk pengerudian lubang lebih kecil pada bahan kayu atau logam
  适合用于木材和钢材上钻孔

Standard Equipment: Chuck Key



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**230W**
Capacity Kapasiti 能力	**Steel: 6.5mm (1/4")** **Wood: 9mm (11/32")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 4,500**
Dimensions (L x W x H) Dimensi 体积	**203x63x171mm** **(8"x2-1/2"x6-3/4")**
Net Weight Berat Bersih 淨重	**0.95kg (2.1lbs)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft.)**

M0600G / M0600B 10mm (3/8")

64

Drill
Gerudi
电钻

- **Powerful 350W motor for continuous operation**
  Motor berkuasa 350W untuk operasi berterusan
  强力350W马达可持续运作

Standard Equipment: Chuck Key, Chuck Key Holder



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**350W**
Capacity Kapasiti 能力	**Steel: 10mm (3/8")** **Wood: 20mm (13/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 3,000**
Dimensions (L x W x H) Dimensi 体积	**230x66x176mm** **(9"x2-5/8"x6-15/16")**
Net Weight Berat Bersih 淨重	**1.2kg (2.6lbs)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft)**

M6001G / M6001B 10mm (3/8")

85

Drill
Gerudi
电钻

- **Powerful 450W motor for continuous operation**
  Motor berkuasa 450W untuk operasi berterusan
  强力450W马达可持续运作

Standard Equipment: Chuck Key



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**450W**
Capacity Kapasiti 能力	**Steel: 10mm (3/8")** **Wood: 25mm (1")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 3,000**
Dimensions (L x W x H) Dimensi 体积	**229x64x175mm** **(9"x2-1/2"x6-7/8")**
Net Weight Berat Bersih 淨重	**1.3kg (2.9lbs)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft.)**

M6200G / M6200B 13mm (1/2")

303

Drill
Gerudi
电钻

- **Powerful 800W motor with variable speed for improved mixing and drilling performance**
  Motor berkuasa 800W dengan Pilihan kawalan kelajuan berubah untuk prestasi pencampuran dan penggerudian yang lebih baik
  强力800W马达配备变速控制功率提高混合和钻孔性能

Standard Equipment: Chuck Key, Top Grip



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**800W**
Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 36mm (1-7/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 700**
Dimensions (L x W x H) Dimensi 体积	**267x86x388mm** **(10-1/2"x3-3/8"x15-1/4")**
Net Weight Berat Bersih 淨重	**2.7kg (6.0lbs.)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft.)**

M6600XG / M6600XB

303

Mixer
Pengadun
搅拌机


- **Powerful 800W motor for improved mixing and drilling performance**
  Motor berkuasa 800W untuk prestasi pencampuran dan penggerudian yang lebih baik
  强力800W马达提高混合和钻孔性能

Standard Equipment: Mixing Blade, Shaft, Top Grip, Wrenches

Come with



Mixing Blade 165

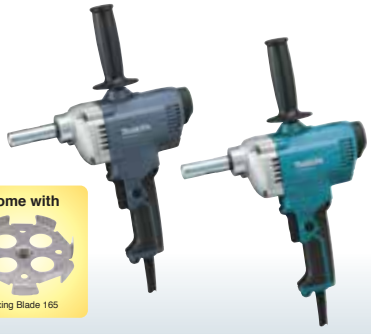

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**800W**
Blade Diameter Diameter Bilah 锯片直径	**165mm (6-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 700**
Dimensions (L x W x H) Dimensi 体积	**280x86x388mm** **(11"x3-3/8"x15-1/4")**
Net Weight Berat Bersih 淨重	**2.6kg (5.7lbs.)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft.)**

M8103G / M8103B 13mm (1/2")

85

Hammer Drill
Gerudi Tukul
冲击电钻

2 modes

- **2-mode operation for hammering with rotation or rotation only**
  Operasi 2 mod, penukulan dengan putaran atau hanya putaran
  2档模式变换，旋转并锤击或仅旋转

Standard Equipment: Chuck Key, Side Grip, Chuck Key Holder



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**430W**
Capacity Kapasiti 能力	**Concrete: 13mm (1/2")** **Steel: 13mm (1/2")** **Wood: 18mm (11/16")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 33,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 3,000**
Dimensions (L x W x H) Dimensi 体积	**255x72x193mm** **(10"x2-13/16"x7-5/8")**
Net Weight Berat Bersih 淨重	**1.8kg (3.9lbs)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft)**

M0801G / M0801B 16mm (5/8")

85

Hammer Drill
Gerudi Tukul
冲击电钻

2 modes

- **2-mode operation for hammering with rotation or rotation only**
  Operasi 2 mod, penukulan dengan putaran atau hanya putaran
  2档模式变换，旋转并锤击或仅旋转

Standard Equipment: Chuck Key, Side Grip



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**500W**
Capacity Kapasiti 能力	**Concrete: 16mm (5/8")** **Steel: 13mm (1/2")** **Wood: 20mm (13/16")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 48,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 3,200**
Dimensions (L x W x H) Dimensi 体积	**261x69x195mm** **(10-1/4"x2-3/4"x7-5/8")**
Net Weight Berat Bersih 淨重	**1.7kg (3.7lbs)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft)**

M8100G / M8100B 16mm (5/8")

85

Hammer Drill
Gerudi Tukul
冲击电钻

2 modes

- **2-mode operation for hammering with rotation or rotation only**
  Operasi 2 mod, penukulan dengan putaran atau hanya putaran
  2档模式变换，旋转并锤击或仅旋转

Standard Equipment: Chuck Key, Side Grip, Depth Gauge



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**710W**
Capacity Kapasiti 能力	**Concrete: 16mm (5/8")** **Steel: 13mm (1/2")** **Wood: 30mm (1-3/16")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 48,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 3,200**
Dimensions (L x W x H) Dimensi 体积	**296x77x202mm (11-5/8"x3"x8")**
Net Weight Berat Bersih 淨重	**2.1kg (4.6lbs.)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft.)**

M8700G / M8700B 22mm (7/8")

459

Rotary Hammer
Tukul Putar
电锤

2 modes

- **2-mode operation for hammering with rotation or rotation only**
  Operasi 2 mod, penukulan dengan putaran atau hanya putaran
  2档模式变换，旋转并锤击或仅旋转

Standard Equipment: Side Grip, Depth Gauge



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**710W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 1.9J** **Our experimental conditions: N/A J**
Capacity Kapasiti 能力	**Concrete: 22mm (7/8")** **Core Bit: 54mm (2-1/8")** **Diamond Core Bit (Dry Type): 65mm (2-9/16")** **Steel: 13mm (1/2")** **Wood: 32mm (1-1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,350**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 1,100**
Dimensions (L x W x H) Dimensi 体积	**362x71x194mm** **(14-1/4"x2-13/16"x7-5/8")**
Net Weight Berat Bersih 淨重	**2.5 - 2.9kg (5.6 - 6.4lbs)**
Power Supply Cord Panjang Kord 电源线	**4.0m (13.1ft.)**

M8701X3G / M8701X3B

459

Combination Hammer
Tukul Kombinasi
冲击电钻电锤

3 modes

- **3-mode operating - rotation only, hammering with rotation, hammering only**
  Operasi 3 mod: hanya putaran, penukulan dengan putaran, hanya penukulan
  3档模式变换: 仅旋转，旋转并锤击，仅锤击

Standard Equipment:
Side Grip, Depth Gauge, Drill Chuck, SDS-Plus Chisel Assortment 3pcs Set (D-30134)

Come with



Bull Point & Chisel 3pcs set (D-30134)

Drill Chuck 13mm (194041-7)



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**800W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009 : 2.3J** **Our experimental conditions: N/A J**
Capacity Kapasiti 能力	**Concrete : 26mm (1")** **Core Bit: 68mm (2-11/16")** **Diamond Core Bit (Dry Type): 80mm (3-1/8")** **Steel : 13mm (1/2")** **Wood : 32mm (1-1/4")**
Impacts per minute (ipm) Impak Per Minit 冲击数	**0-4,500**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0-1,200**
Dimensions (L x W x H) Dimensi 体积	**362x71x194mm** **(14-1/4"x2-13/16"x7-5/8")**
Net Weight Berat Bersih 淨重	**2.7kg (6.0lbs)**
Power Supply Cord Panjang Kord 电源线	**4.0m (13.1ft)**

M8600G / M8600B 17mm (11/16") Hex Shank

105

Demolition Hammer
Tukul Elektrik
电动鎚

- **Satisfactory chipping performance**
  Prestasi penyerpihan yang memuaskan
  卓越碎击性能

Standard Equipment: Bull Point, Side Grip



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**900W**
Impact Energy Kekuatan Impak 单次最大锤击力	**7.2J**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**2,900**
Dimensions (L x W x H) Dimensi 体积	**406x99x232mm (16"x3-7/8"x9-1/8")**
Net Weight Berat Bersih 净重	**5.4kg (12lbs)**
Power Supply Cord Panjang Kord 电源线	**2.5m (8.2ft)**

325



M9509G / M9509B
Slide Switch
Suis Gelangsar 滑动开关



M9513G / M9513B
Toggle Switch
Suis Togol 后置式开关

M9509G / M9509B | M9513G / M9513B 100mm (4")

Angle Grinder
Pengisar Sudut 角向磨光机

- **Powerful 850W motor for the most demanding applications**
  Motor berkuasa 850W untuk aplikasi yang paling mencabar
  强力850W马达适合严峻使用

Standard Equipment: **M9509G:** Side Grip, Lock Nut Wrench
M9513G: Side Grip

WHEEL DIAMETER Diameter Roda | 轮片直径 4" (100mm)

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**850W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**276x118x101mm M9509G (10-7/8"x4-5/8"x4")** **273x118x101mm M9513G (10-3/4"x4-5/8"x4")**
Net Weight Berat Bersih 净重	**1.8kg (3.9lbs)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft)**

459



M9506G / M9506B
Slide Switch
Suis Gelangsar 滑动开关



M9512G / M9512B
Toggle Switch
Suis Togol 后置式开关

M9506G / M9506B | M9512G / M9512B 100mm (4")

Angle Grinder
Pengisar Sudut 角向磨光机

- **Powerful 720W motor for the most demanding applications**
  Motor berkuasa 720W untuk aplikasi yang paling mencabar
  强力720W马达适合严峻使用

Standard Equipment: Side Grip, Lock Nut Wrench

WHEEL DIAMETER Diameter Roda | 轮片直径 4" (100mm)

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**720W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**261x118x101mm M9506G (10-1/4"x4-5/8"x4")** **258x118x101mm M9512G (10-1/8"x4-5/8"x4")**
Net Weight Berat Bersih 净重	**1.6kg (3.6lbs)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft)**

459



M0900G / M0900B
Top Slide Switch
Suis Gelangsar Atas 顶部滑动开关
Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan 方便左右揿子



M0910G / M0910B
Toggle Switch
Suis Togol 后置式开关

M0900G / M0900B | M0910G / M0910B 100mm (4")

Angle Grinder
Pengisar Sudut 角向磨光机

- **High performance and durability**
  Prestasi dan ketahanan tinggi
  高性能与持久耐用

Standard Equipment: Lock Nut Wrench

WHEEL DIAMETER Diameter Roda | 轮片直径 4" (100mm)

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**540W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**12,000**
Dimensions (L x W x H) Dimensi 体积	**251x118x97mm M0900G (9-7/8"x4-5/8"x3-13/16")** **251x118x93mm M0910G (9-7/8"x4-5/8"x3-5/8")**
Net Weight Berat Bersih 净重	**1.6kg (3.5lbs)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft)**

M9504G 100mm (4")

411

Angle Grinder
Pengisar Sudut
角向磨光机

Toggle Switch
Suis Togol 后置式开关

Sebelum stok masih ada 售完即止
WHILE STOCK LAST

- **High performance and durability**
  Prestasi dan ketahanan tinggi
  高性能与持久耐用

WHEEL DIAMETER Diameter Roda | 轮片直径 4" (100mm)



Standard Equipment:
Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**570W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**12,000**
Dimensions (L x W x H) Dimensi 体积	**256x118x92mm (10-1/8"x4-5/8"x3-5/8")**
Net Weight Berat Bersih 净重	**1.8kg (4.0lbs.)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft)**

M9511G / M9511B 125mm (5")

325

Angle Grinder
Pengisar Sudut
角向磨光机

Slide Switch
Suis Gelangsar 滑动开关

- **Slimmer barrel grip with easy gripping and handling**
  Memberikan prestasi kawalan unggul dan keselesaan
  提供更优异的控制性能和舒适度

WHEEL DIAMETER Diameter Roda | 轮片直径 5" (125mm)



Standard Equipment:
Side Grip, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**850W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**276x140x111mm (10-7/8"x5-1/2"x4-3/8")**
Net Weight Berat Bersih 净重	**2.0kg (4.5lbs)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft)**

M9508G / M9508B 125mm (5")

459

Angle Grinder
Pengisar Sudut
角向磨光机

Slide Switch
Suis Gelangsar 滑动开关

- **Compact and lightweight for high production work**
  Kompak dan ringan untuk kerja pengeluaran yang tinggi
  紧凑轻巧型，更有效率地工作

WHEEL DIAMETER Diameter Roda | 轮片直径 5" (125mm)



Standard Equipment:
Side Grip, Lock Nut Wrench,
Wheel Cover

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**720W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**261x140x111mm (10-1/4"x5-1/2"x4-3/8")**
Net Weight Berat Bersih 净重	**1.9kg (4.1lbs)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft)**

M9503G / M9503B 125mm (5")

411

Angle Grinder
Pengisar Sudut
角向磨光机

Top Slide Switch
Suis Gelangsar Atas 顶部滑动开关
Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan 方便左右握手

- **Ideal for welders, fabricators, masons, maintenance/ repair and more**
  Ideal untuk pengimpal, fabrikasi, tukang batu, penyelenggaraan atau pembaikan dan banyak lagi
  适用于焊工，制造商，泥瓦匠，维修与修理等

WHEEL DIAMETER Diameter Roda | 轮片直径 5" (125mm)



Standard Equipment:
Side Grip, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**570W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**270x140x110mm (10-5/8"x5-1/2"x4-5/16")**
Net Weight Berat Bersih 净重	**2.0kg (4.4lbs)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft)**

M9002G / M9002B 125mm (5")

303

Angle Grinder
Pengisar Sudut
角向磨光机

Trigger Switch
Suis Pemicu 扳机开关

- **High performance and durability**
  Prestasi dan ketahanan tinggi
  高性能与持久耐用

WHEEL DIAMETER Diameter Roda | 轮片直径 5" (125mm)



Standard Equipment:
Side Grip, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,050W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**361x140x124mm (14-1/4"x5-1/2"x4-7/8")**
Net Weight Berat Bersih 净重	**2.8kg (6.1lbs.)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft.)**

M9000G / M9000B 180mm (7") 204

Angle Grinder
Pengisar Sudut
角向磨光机

Trigger Switch
Suis Pemicu 扳机开关



- **Powerful 2,000W motor for the most demanding applications**
  Motor berkuasa 2,000W untuk aplikasi yang paling mencabar
  强力2,000W马达适合严峻使用

WHEEL DIAMETER
Diameter Roda | 轮片直径
7"
(180mm)

Standard Equipment:
Side Grip, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,000W**
Wheel Diameter Diameter Roda 轮片直径	**180mm (7")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Dimensi 体积	**466x200x138mm (18-3/8"x7-7/8"x5-7/16")**
Net Weight Berat Bersih 净重	**5.4kg (12.0lbs.)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft.)**

M9001G / M9001B 230mm (9") 204

Angle Grinder
Pengisar Sudut
角向磨光机

Trigger Switch
Suis Pemicu 扳机开关



- **Powerful 2,000W motor for the most demanding applications**
  Motor berkuasa 2,000W untuk aplikasi yang paling mencabar
  强力2,000W马达适合严峻使用

WHEEL DIAMETER
Diameter Roda | 轮片直径
9"
(230mm)

Standard Equipment:
Side Grip, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,000W**
Wheel Diameter Diameter Roda 轮片直径	**230mm (9")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**6,600**
Dimensions (L x W x H) Dimensi 体积	**466x250x138mm (18-3/8"x9-7/8"x5-7/16")**
Net Weight Berat Bersih 净重	**5.7kg (12.6lbs.)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft.)**

M9400G / M9400B 100mm (4") 153

Belt Sander
Pengampelas
带式砂光机



- **Powerful 940W motor for faster material removal**
  Motor berkuasa 940W untuk pengisaran yang lebih cepat
  功率强大的940W马达提供更快的研磨

Standard Equipment: Abrasive Belt, Dust Bag (1233280), Carbon Plate, Step

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**940W**
Belt Size Saiz Tali Pinggang 皮带尺寸	**100 x 610mm (4" x 24")**
Belt Speed Kelajuan Tali Pinggang 皮带速度	**380m/min (1,250ft/min)**
Dimensions (L x W x H) Dimensi 体积	**354x175x169mm (14"x6-7/8"x6-5/8")**
Net Weight Berat Bersih 净重	**6.2kg (13.7lbs.)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft.)**

M9204G / M9204B 125mm (5") 419

Random Orbit Sander
Pengampelas
砂光机



- **Available with dust bag and also connectable to vacuum cleaners without adapter**
  Dengan beg debu dan juga boleh disambungkan ke pembersih vakum tanpa penyesuai
  配有防尘袋且可连接到没有连接器的吸尘器

Standard Equipment: Dust Bag, Abrasive Paper

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**240W**
Pad Size Saiz Pad 垫子尺寸	**123mm (4-7/8")**
Abrasive Paper Size Saiz Kertas Pasir 砂纸尺寸	**125mm (5")**
Orbits Per Minute (OPM) Bilangan Putaran 轨道转数	**12,000**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**24,000**
Orbit Diameter Jejaki Diameter 轨道直径	**2.8mm (1/8")**
Dimensions (L x W x H) Dimensi 体积	**153x123x144mm (6"x4-7/8"x5-5/8")**
Net Weight Berat Bersih 净重	**1.2kg (2.6lbs)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft)**

M9202G / M9202B 419

Random Orbit Sander
Pengampelas
砂光机



- **Rocker on/off switch for efficient operation**
  Suis gelangsar untuk operasi yang cekap
  滑动式按钮开关有效操作

Standard Equipment: Abrasive Paper

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**240W**
Pad Size Saiz Pad 垫子尺寸	**123mm (4-7/8")**
Abrasive Disc Size Saiz Cakera 磨盘尺寸	**125mm (5")**
Orbits Per Minute (OPM) Bilangan Putaran 轨道转数	**12,000**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**24,000**
Orbit Diameter Jejaki Diameter 轨道直径	**2.8mm (1/8")**
Dimensions (L x W x H) Dimensi 体积	**127x123x142mm (5"x4-7/8"x5-5/8")**
Net Weight Berat Bersih 净重	**1.1kg (2.4lbs)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft)**

M9200G / M9200B

419

Finishing Sander
Mesin Pengamplasan
砂光机



- **14,000OPM for fast and smooth finish sanding**
  14,000OPM untuk pelicin dengan cepat
  14000OPM用于快速研磨

Standard Equipment: Abrasive paper

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**180W**
Pad Size Saiz Pad 垫子尺寸	**112 x 102mm (4-3/8" x 4")**
Abrasive Paper Size Saiz Kertas Pasir 砂纸尺寸	**114 x 140mm (4-1/2" x 5-1/2")**
Orbits Per Minute (OPM) Bilangan Putaran 轨道转数	**14,000**
Dimensions (L x W x H) Dimensi 体积	**110x112x133mm (4-5/16"x4-3/8"x5-1/4")**
Net Weight Berat Bersih 净重	**0.9kg (2lbs)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft)**

M9201G / M9201B

64

Finishing Sander
Mesin Pengamplasan
砂光机



- **Compact and lightweight body for better handling**
  Padat dan ringan
  小巧轻便的机身易于操纵

Standard Equipment: Abrasive Paper

Continuous Rating input Input Kuasa Berterusan 额定输入功率	**180W**
Pad Size Saiz Pad 垫子尺寸	**93 x 185mm (3-5/8" x 7-1/4")**
Abrasive Paper Size Saiz Kertas Pasir 砂纸尺寸	**93 x 228mm (3-5/8" x 9")**
Orbits Per Minute (OPM) Bilangan Putaran 轨道转数	**12,000**
Dimensions (L x W x H) Dimensi 体积	**214x92x147mm (8-3/8"x3-5/8"x5-3/4")**
Net Weight Berat Bersih 净重	**1.4kg (3.1lbs)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft)**

M5801G / M5801B 185mm (7-1/4")

303

Circular Saw
Gergaji Piring
圆锯



- **High performance and durability**
  Prestasi dan ketahanan tinggi
  高性能兼耐用

Standard Equipment: TCT Saw Blade, Guide Rule, Hex Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,050W**
Blade Diameter Diameter Bilah 锯片直径	**185mm (7-1/4")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 66mm (2-5/8")** **45°: 44mm (1-3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**4,900**
Dimensions (L x W x H) Dimensi 体积	**284x231x243mm (11-1/8"x9-1/8"x9-9/16")**
Net Weight Berat Bersih 净重	**3.7kg (8.1lbs)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft.)**

M2300G / M2300B 255mm (10")

JM23000123

Compound Miter Saw
Gergaji Kompaun Miter
斜断锯



- **Powerful 1,500W motor**
  Motor berkuasa 1,500W
  强力1,500W马达

Standard Equipment: Wrench, Dust Bag, Triangular Rule, Vise Assembly, Set Plate, Verticle Vise

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,500W**
Blade Diameter Diameter Bilah 锯片直径	**255mm (10")**
Miter Angle Sudut Miter 斜接角	**45°L/ 45°R**
Bevel Angle Sudut Bevel 斜角	**45°L**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90° Miter: 75 x 130mm (2-15/16" x 5-1/8")** **45° Miter, L/R: 75 x 90mm (2-15/16" x 3-9/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**4,200**
Dimensions (L x W x H) Dimensi 体积	**610x485x515mm (24"x19-1/8"x20-1/4")**
Net Weight Berat Bersih 净重	**14.7kg (32.5lbs)**
Power Supply Cord Panjang Kord 电源线	**2.5m (8.2ft)**

M4302G / M4302B

411

Jig Saw
Gergaji Jig
线锯机



- **Heavy duty aluminum gear housing for increased durability**
  Gear aluminium tugas berat untuk meningkatkan ketahanan
  重型铝制齿轮组件结构提高耐用性

Standard Equipment: 2x Jig Saw Blade (B-13 & No. 51), Hex Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**450W**
Max Cutting Capacity at 90° Kapasiti Pemotongan Maksimum 最大切割能力	**Wood: 55mm (2-3/16")** **Steel: 6mm (1/4")**
Length of Stroke Panjang Strok 冲程长度	**26mm (1")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 3,100**
Dimensions (L x W x H) Dimensi 体积	**219x85x191mm (8-5/8"x3-3/8"x7-1/2")**
Net Weight Berat Bersih 净重	**2.5kg (5.5lbs.)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft.)**

M4301G / M4301B

64

Jig Saw
Gergaji Jig
线锯机

- **Powerful 450W motor**
  Motor berkuasa 450W
  强力450W马达

Standard Equipment: Jig Saw Blade (B-10), Hex Wrench



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**450W**
Max Cutting Capacity at 90° Kapasiti Pemotongan Maksimum 最大切割能力	**Wood: 65mm (2-9/16")** **Steel: 6mm (1/4")**
Length of Stroke Panjang Strok 冲程长度	**18mm (11/16")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 3,100**
Dimensions (L x W x H) Dimensi 体积	**214x75x202mm** **(8-3/8"x2-15/16"x8")**
Net Weight Berat Bersih 淨重	**1.9kg (4.1lbs)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft)**

M4501G / M4501B

303

Recipro Saw
Gergaji Resipro
往复锯

- **Powerful 1,010W motor for improved performance**
  Motor berkuasa 1,010W untuk prestasi lebih baik
  强劲的1,010W马达提高性能



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,010W**
Length of Stroke Panjang Strok 冲程长度	**28mm (1-1/8")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 2,800**
Capacity Kapasiti 能力	**Pipe : 130mm (5-1/8")** **Wood: 255mm (10")**
Dimensions (L x W x H) Dimensi 体积	**457x98x170mm** **(18"x3-7/8"x6-11/16")**
Net Weight Berat Bersih 淨重	**3.2kg (7lbs)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft)**

M0400G / M0400B 110mm (4-3/8")

303

Cutter
Pemotong
切割机

- **Powerful 1,200W motor**
  Motor berkuasa 1,200W
  强力1,200W马达

Standard Equipment: Wrench, Hex Wrench
(Tool does not come with Diamond Wheel)



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,200W**
Blade Diameter Diameter Bilah 锯片直径	**110mm (4-3/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 32mm (1-1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**13,800**
Dimensions (L x W x H) Dimensi 体积	**224x195x164mm** **(8-7/8"x7-5/8"x6-1/2")**
Net Weight Berat Bersih 淨重	**2.5kg (5.6lbs.)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft.)**

M4100G / M4100B 110mm (4-3/8")

303

Cutter
Pemotong
切割机

- **Compact and lightweight for reduced operator fatigue**
  Kompak dan ringan untuk mengurangkan keletihan pengguna
  小巧轻便，减少疲劳

Standard Equipment: Wrench, Hex Wrench, Water Supply Set
(Tool does not come with Diamond Wheel)



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,200W**
Blade Diameter Diameter Bilah 锯片直径	**110mm (4-3/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 32mm (1-1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**13,000**
Dimensions (L x W x H) Dimensi 体积	**227x209x166mm** **(8-15/16"x8-1/4"x6-1/2")**
Net Weight Berat Bersih 淨重	**2.9kg (6.4lbs)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft.)**

M2401G / M2401B 355mm (14")

203

Portable Cut-off
Mesin Pemotong
型材切割机

- **Large cutting capacity;**
  Cuts up to 127mm (5") round and 102mm (4") x 194mm (7-5/8") rectangular
  Kapasiti pemotongan tinggi
  切割能力高

Standard Equipment: Abrasive Cut-Off Wheel, Hex Wrench



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,000W**
Wheel Diameter Diameter Roda 轮片直径	**355mm (14")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,800**
Dimensions (L x W x H) Dimensi 体积	**500x280x620mm** **(19-3/4"x11"x24-3/8")**
Net Weight Berat Bersih 淨重	**13.7kg (30.2lbs.)**
Power Supply Cord Panjang Kord 电源线	**2.5m (8.2ft.)**





M2403B 355mm (14")

203

Portable Cut-off
Mesin Pemotong
型材切割机

- **High performance and durability at less expense**
  Prestasi dan ketahanan tinggi dengan kos yang lebih rendah
  以更低的成本获得高性能兼耐用



Standard Equipment: Cut-Off Wheel, Hex Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,200W**
Wheel Diameter Diameter Roda 轮片直径	**355mm (14")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,900**
Dimensions (L x W x H) Dimensi 体积	**515x280x640mm (20-1/4x11x25-1/4")**
Net Weight Berat Bersih 淨重	**13.8 - 15.3kg (30.4 - 33.7lbs.)**
Power Supply Cord Panjang Kord 电源线	**2.5m (8.2ft)**

M1100G / M1100B 82mm (3-1/4")

303

Planer
Planer
电刨

- **Easy blade setting system for fast blade installation**
  Sistem pemasangan bilah mudah
  刀片易安装系统



Standard Equipment: Planer Blade, Sharpening Holder Assembly (for resharpenable blade), Blade Gauge, Socket Wrench, Guide Rule

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**750W**
Planing Width Lebar Pelan 刨削宽度	**82mm (3-1/4")**
Planing Depth Kedalaman Pelan 刨削深度	**3mm (1/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**18,000**
Dimensions (L x W x H) Dimensi 体积	**390x175x140mm (15-3/8"x6-7/8"x5-1/2")**
Net Weight Berat Bersih 淨重	**4.6kg (10.2lbs.)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft.)**

M1901G / M1901B | M1902G / M1902B 82mm (3-1/4")

411

Planer
Planer
电刨

- **High performance and durability**
  Prestasi dan ketahanan tinggi 高性能兼耐用





Standard Equipment:
M1901G: Planer Blade, Sharpening Holder Assembly (for resharpenable blade), Blade Gauge, Socket Wrench, Guide Rule
M1902G: Planer Blade, Sharpening Holder Assembly (for resharpenable blade), Blade Gauge, Guide Rule

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**580W**
Planing Width Lebar Pelan 刨削宽度	**82mm (3-1/4")**
Planing Depth Kedalaman Pelan 刨削深度	**2mm (1/16") M1901G** **1mm (1/32") M1902G**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**16,000**
Dimensions (L x W x H) Dimensi 体积	**285x157x160mm (11-1/4"x6-3/16"x6-5/16")**
Net Weight Berat Bersih 淨重	**2.8 - 2.9kg (6.1 - 6.4lbs)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft)**

M3600G / M3600B 12mm (1/2")

203

Router
Pemangkas
雕刻机

- **Conveniently located plunge lock lever for efficient operation**
  Pelarasan tuil yang mudah untuk operasi yang cekap
  便利的插入式锁定杆可实现高效操作

Standard Equipment: Straight Guide, Templet Guide, Guide Holder, Collet Sleeve, Straight Bit, Wrench



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,650W**
Collet Capacity Kapasiti Collet 夹头直径	**12mm (1/2")**
Plunge Capacity Kapasiti Plunge 能力	**0 - 60mm (0 - 2-3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**22,000**
Dimensions (L x W x H) Dimensi 体积	**284x148x300mm (11-1/8"x5-7/8"x11-3/4")**
Net Weight Berat Bersih 淨重	**5.5kg (12.2lbs.)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft.)**

M3601G / M3601B 6mm (1/4"), 8mm (3/8")

106

Router
Pemangkas
雕刻机

- **Powerful 900W motor**
  Motor berkuasa 900W
  强力900W马达

Standard Equipment: Straight Guide, Straight Bit (733238-9), Wrench



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**900W**
Collet Capacity Kapasiti Collet 夹头直径	**6 mm (1/4") | 8 mm (3/8")**
Plunge Capacity Kapasiti Plunge 能力	**0 - 35mm (0 - 1-3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**27,000**
Dimensions (L x W x H) Dimensi 体积	**256x110x218mm (10-1/8"x4-5/16"x8-5/8")**
Net Weight Berat Bersih 淨重	**2.7kg (6.0lbs)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft)**

M3602B 12mm (1/2")

203

Router
Pemangkas
雕刻机

- **Powerful 1,650 W motor delivers 22,000 RPM for the most demanding applications**

NEW BARU | 新

Standard Equipment: Straight Guide, Templet Guide, Trimmer Guide, Guide Holder, Collet Sleeve, Straight Bit, Wrench



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,650W**
Collet Capacity Kapasiti Collet 夹头直径	**12mm (1/2")**
Plunge Capacity Kapasiti Plunge 能力	**0 - 60mm (0 - 2-3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**22,000**
Dimensions (L x W x H) Dimensi 体积	**148x284x300mm (5-7/8x11-1/8x11-3/4")**
Net Weight Berat Bersih 淨重	**5.7kg (12.6lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

M9800G / M9800B

459

Multi Tool
Mesin Pemotong Berbilang Fungsi
多功能切割打磨机

- **Lightweight Design**
  Reka bentuk yang padat dan ringan
  紧凑轻巧的设计

Standard Equipment: Hex Wrench



Oscillations Per Minute (OPM) Kelajuan Ayunan 摆动速度	**15,000 - 22,000**
Oscillation Angle Sudut Ayunan 摆动角度	**Left: 1.6° | Right: 1.6° | Total: 3.2°**
Dimensions (L x W x H) Dimensi 体积	**283x68x98mm (11-1/8"x2-11/16"x3-7/8")**
Net Weight Berat Bersih 淨重	**1.2 - 1.3kg (2.7 - 3.0 lbs.)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft)**

M3700G / M3700B 6mm (1/4")

411

Trimmer
Mesin Perapi
修边雕刻机

- **Compact and lightweight body for better handling**
  Padat dan ringan
  小巧轻便的机身易于操纵

Standard Equipment: Trimmer Guide, Straight Guide, Templet Guide, Straight Bit, Chip Deflector, Wrench



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**530W**
Collet Capacity Kapasiti Collet 夹头直径	**6mm or 1/4"**
Plunge Capacity Kapasiti Plunge 铣削能力	**0 - 42mm (0 - 1-5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**35,000**
Dimensions (L x W x H) Dimensi 体积	**82x90x199mm (3-1/4"x3-1/2"x7-7/8")**
Net Weight Berat Bersih 淨重	**1.4kg (3.1lbs.)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft.)**

M3701G / M3701B 6mm (1/4") 411

Trimmer
Mesin Perapi
修边雕刻机

- **Aluminium housing for higher durability**
  Cangkang aluminium untuk ketahanan yang lebih tinggi
  铝外壳更高的耐用性



Standard Equipment: Trimmer Guide, Straight Guide Assembly, Templet Guide, Straight Bit (733238A9), Chip Deflector, Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**530W**
Collet Capacity Kapasiti Collet 夹头直径	**6mm or 1/4"**
Plunge Capacity Kapasiti Plunge 铣削能力	**0 - 42mm (0 - 1-5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**35,000**
Dimensions (L x W x H) Dimensi 体积	**82x90x199mm (3-1/4"x3-1/2"x7-7/8")**
Net Weight Berat Bersih 净重	**1.6kg (3.4lbs.)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft.)**

M3702B 6mm (1/4") 411

Trimmer
Mesin Perapi
修边雕刻机



- **Super smooth rack-and-pinion depth adjustment**



Standard Equipment: Collet Cone, Trimmer Guide, Straight Guide Assembly, Templet Guide, Straight Bit, Chip Deflector, Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**530W**
Collet Capacity Kapasiti Collet 夹头直径	**6mm or 1/4"**
Plunge Capacity Kapasiti Plunge 铣削能力	**0 - 42mm (0 - 1-5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**35,000**
Dimensions (L x W x H) Dimensi 体积	**82x90x211mm (3-1/4x3-1/2x8-5/16")**
Net Weight Berat Bersih 净重	**1.5kg (3.3lbs.)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft.)**

M4000G / M4000B 85

Blower
Mesin Blower
吹风机

- **Compact and lightweight increased operator comfort**
  Kompak dan ringan operasi yang selesa
  小巧轻便操作舒适



Standard Equipment: Nozzle Assembly, Sash Nozzle

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**530W**
Air Volume Isipadu Angin 风量	**1.2-2.9m³/min**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500 - 16,000**
Dimensions (L x W x H) Dimensi 体积	**427x161x212mm (16-3/4"x6-3/8"x8-3/8")**
Net Weight Berat Bersih 净重	**1.5kg (3.4lbs)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft)**

M4001G / M4001B 303

Blower
Mesin Blower
吹风机

- **Two tools in one; quickly converts to a vacuum for added versatility**
  Alat 2 dalam 1, vakum dan blower untuk fleksibiliti tambahan
  一机2用，集尘与吹风




Standard Equipment: Nozzle, Dust Bag

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**600W**
Max Air Volume Isipadu Angin Maksimum 最大风量	**0 - 4.1m³/min**
Max Air Velocity Velositi Angin Maksimum 最大风速	**0 - 91m/s**
Air Pressure Tekanan Udara 气压	**0 - 5.7kPa**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 16,000**
Dimensions (L x W x H) Dimensi 体积	**480x185x178mm (18-7/8"x7-1/4"x7")**
Net Weight Berat Bersih 净重	**1.9 - 2.0kg (4.3 - 4.5lbs)**
Power Supply Cord Panjang Kord 电源线	**2.0m (6.6ft.)**

Carbon Brush List

Berus Karbon 碳刷表



Carbon Brush Berus Karbon 碳刷型号	Part Number Nombor Bahagian 零件号码	Applicable Model Model yang berkenaan 适用型号											
CB-51	181021-2	4300BV	6016	N1900B									
CB-64	191627-8	4327 4329	4327M	6413	BO3710	BO5041	GD0603	GV5010	GV6010	JV0600K	M0600G/B	M4301G/B	M9201G/B
CB-65	191628-6	6905B											
CB-85	191998-3	HP1630	M0801G/B	M4000G/B	M6001G/B	M6501G/B	M8100G/B	M8103G/B					
CB-100	181030-1	6906	9215SB	9924DB									
CB-106	181410-1	1911B	M3601G/B	RP0900									
CB-132	191972-1	KP0810	UC3541A	UC4041A									
CB-153	181044-0	1805N HS0600 2704	2012NB LF1000 LS1030N	2416S LS0714	3501N LS1019L	3600H LS1040	3612BR LS1219L	4107R LS1440	5008MG M9400G/B	5016B N5900B	5103N TW1000	5402 UC3551A	9401 UC4051A
CB-174	196018-8	HS6100											
CB-203	191953-5	LC1230	LW1400	LW1401	M2400G/B	M2401G/B	M3600G/B	M5801G/B	RP1801	RP2301FC			
CB-253	194547-5	GA6020C	PC5000C	PC5001C									
CB-260	191D85-2	GA4051R											
CB-303	191963-2	2107F GA5020 M4100G/B 6305	4100NH GA6010 M4501G/B HS7100	4100NH2 GV7000C M6200G/B JR3051T	4100NH3 HS6600 M6600G/B 4100KB	4131 HS7600 M9002G/B	5806B JN3201 PV7000C	6924N JR3050T SP6000J	9237C JR3070CT UB1103	9404 JS3201 UT1305	9903 M0400G/B UT2204	CA5000X M1100G/B M5801G/B	GA5010 M4001G/B JR3061T
CB-318	191978-9	9563C SA5040C	9565CR/PC SG1251J	GA4040C PC5010C	GA4041C PO6000	GA4541C	GA5041C	GD0800C	GD0801C	GD0811C	PK5001C	PO5000C	PW5001C
CB-325	194074-2	9553HBG GA5040 M9513G/B	9553HNG GA6040 HR2652	9556HNG/ HN/NB GD0600	9556HPG/ PB GD0601	9557HNG/ NBG HR2320T	9557HPG HR2470	9558HNG/ NBG HR2611FT	9558HPG HR2630	BO6050J HR2631FT	GA4040 HR2810	GA4540 M9509G/B	GA4540R M9511G/B
CB-411	191940-4	3709 M3701G/B	4403 M9503G/B	6922NB RT0700C	9031 TD0101F	9911 TW0200	DS4012 TW0350	DS5000 M4302G/B	JN1601 M9504G	KP0800X 3901	M1901G/B HP0300	M1902G/B DF0300	M3700G/B
CB-419	191962-4	4350CT HR1830	4351CT HR2020	BO4556 JS1300	BO4901 M9200G/B	BO5031 M9202G/B	DA3010F M9204G/B	FS2300 TD0100	FS2500 BO4510H	FS2700 9035H	FS4200 HP1230	FS6300 DP2010	HP2050
CB-459	194722-3	GA4030 JS1602	GA4030R M0900G/B	GA4031 M0910G/B	GA4034 M8700G/B	GA4530 M8701X3G/B	GA4530R M9506G/B	GA5030 M9508G/B	GA5030R M9512G/B	GA5034 PJ7000	HR1840 TM3000C	HR1841F TM3010C	JS1601
	JM23000123	M2300G/B	LS1201FL	LS1018L									
Auto Cut-out Carbon Brush													
CB-105	181038-5	9045B	HM0810TA	M8600G/B									
CB-155	181048-2	HM1201											
CB-173	195483-8	VC1310L	VC2211M	VC2510L	VC3210L	VC3211M							
CB-175	195844-2	HM1203C	HM1213C	HM1214C	HM1307C	HM1317C	HR5202C	HR5212C	HR5211C	HR4511C	HR4501C		
CB-204	191957-7	4112HS M9000G/B	4114S M9001G/B	GA7020	GA7040R	GA7050	GA9020	GA9040R	GA9050	GS5000	GS6000	HM1306	HM1810
CB-218	197129-2	GA7060	GA7060R	GA7061R	GA7062	GA7063R	GA9060	GA9060R	GA9061R	HM1812	HM1511	HM1501	
CB-350	194160-9	HK1820 HR3011FC	HM0870C	HM0871C	HR3200C	HR3210C	HR3530	HR4001C	HR4002	HR4003C	HR4013C	HR4030C	HR3001C
Carbon Brush for Cordless tool													
CB-5	198887-3	DTD156											
CB-430	191971-3	DCO180 DUC122	DGA402 DCS550	DGA452 DCS552	DGD800 DHR165	DGD801	DJN161	DJS101	DJS161	DPB180	DPJ180	DSS501	DUB361
CB-440	194427-5	DDA351 DTW152	DDF458	DDF482	DFR550	DHP458	DHP482	DJS130	DJV180	DSC162	DSC191	TD091D	DPP200
CB-441	194435-6	DHR202	DHR241	DHS630	DJR181	DJR186	DKP180	DSS610	DTW450	DLS713			
CB-442	194928-3	DHR263	DHS710	DUC252	DUH651	BUH650/ UH650D	BUH550/ UH550D						
CB-448	196854-2	DTD149	DTD152	DTW251									

Makita Malaysia


Scan for our location
Imbas untuk lokasi kami
扫描位置地图

Makita Corporation was founded in 1915 as an electric motor sales and repair company. Makita has grown to become Japan's top manufacturer of portable power tools and recognized leader globally. In May 2013, Makita Malaysia Sales Subsidiary was established in Subang Jaya to provide the best service to cater and satisfy the increased demand and needs of Makita product range in the market. As a cordless tools company, we have the widest range of DC Cordless tools in the market. We envisioned a zero emission working environment with our wide range of DC Cordless Outdoor Power Equipment (DC Cordless OPE), as well as a clean and dustless working environment through our wide range of DC Cordless Cleaner & Vacuum Series. Utilizing the Compact eXtreme Technology (CXT) and Lithium-Ion eXtreme Technology (LXT) in our wide range of DC Cordless tools brings superb and durable performance for professional needs.

Makita Corporation ditubuhkan pada tahun 1915 sebagai syarikat jualan dan pembaikan motor elektrik. Makita telah berkembang menjadi pengilang utama alat-alat kuasa mudah alih dan pemimpin diiktiraf di peringkat global. Pada bulan Mei 2013, Subsidi Jualan Makita Malaysia ditubuhkan di Subang Jaya untuk menyediakan perkhidmatan terbaik untuk memenuhi permintaan pengguna dan memenuhi keperluan produk Makita di pasaran.Sebagai sebuah syarikat jualan peralatan tanpa kord, kami mengimpikan suasana kerja tanpa pencemaran melalui peralatan aktiviti kerja luar Litium-Ion (Li-ion OPE). Tambahan pula, ia menjadikan persekitaran kerja yang bersih dan tanpa habuk dengan Siri Peralatan Pembersihan kami. Teknologi eXtreme Compact (CXT) dan Teknologi Litium-Ion eXtreme (LXT) dicipta untuk alatan tanpa kord berprestasi tinggi dan tahan lama supaya memenuhi kehendak golongan profesional.

牧田公司成立于1915年，是一家电动机销售和维修公司。 牧田已发展成为日本最大的便携式电动工具制造商，并且是全球公认的领导者。2013年5月，牧田马来西亚销售子公司在梳邦再也成立，以提供最佳服务以满足市场上对牧田产品不断增长的需求。通过一系列的锂电园林与户外工具 (Li-ion OPE)，我们致力于实现无排气的工作环境，我们的吸尘器系列，确保各类工业维持干净且无尘的工作环境。我们采用紧凑型极限技术 (CXT) 和锂离子技术 (LXT)，为专业需求打造高效率兼耐用性高的充电式工具。




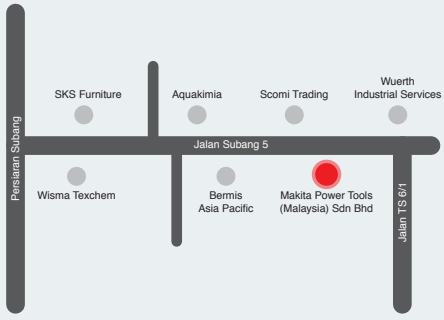

HQ & Service Centre
总部和服务与展示中心

Lot 824, Jalan Subang 5,
Subang Industrial Area,
47500 Subang Jaya, Selangor.
Tel: 03-8023 0824 (General) I Fax: 03-8022 1448
03-8022 1443 (Service)




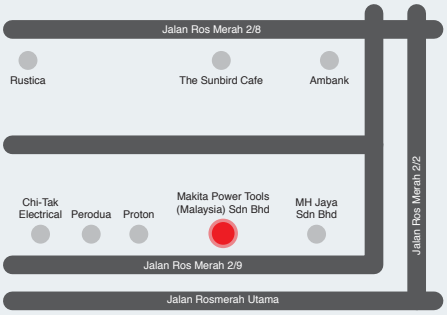

Johor (Johor Bahru) Service Centre
柔佛(新山)服务与展示中心

No.12 & 14, Jalan Rosmerah 2/9,
Taman Johor Jaya,
81100 Johor Bahru, Johor.
Tel: 07-364 9406 I Fax: 07-364 9407




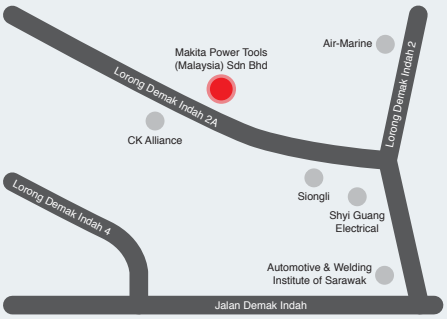

Sarawak (Kuching) Service Centre
砂拉越(古晋)服务与展示中心

Lot 1227, Lorong Demak Indah 2A,
Demak Laut Industrial Area, Phase 2A,
93050 Kuching, Sarawak.
Tel: 082-496 800 I Fax: 082-496 900



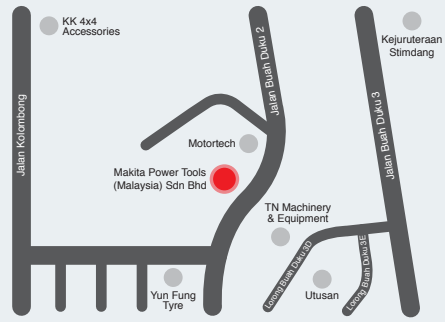

Sabah (Kota Kinabalu) Service Centre
沙巴(亚庇)服务与展示中心

Lot 19, Jalan Buah Duku,
Kolombong Light Industrial Estate,
Off Kolombong, Kolombong Zone 1,
88450 Inanam, Kota Kinabalu, Sabah.
Tel: 088-388 278 I Fax: 088-388 279

Makita®

JAPAN No.1 POWER TOOLS SELLING BRAND

THE CORDLESS TOOLS COMPANY

EXTREME CORDLESS POWER

Schedule an
On-site Demonstration for your team!

Like us on Facebook
MAKITA MALAYSIA

We are happy to visit your office for on-site demonstrations focusing on 320+ DC tools at your convenience. Our professional technicians will intoduce suitable DC tools that match your requirements, demonstrate correct operation on site and advise on maintenance of Makita DC tools. Get in-depth understanding how Makita latest DC tools and technologies could benefit your organisation, “hands-on” to try Makita DC tools to experience the Extreme Cordless Power!

Kami gembira untuk melawat tapak kerja anda untuk demonstrasi kepada 300+ alat kuasa tanpa kord. Juruteknik profesional kami sedia untuk memperkenalkan alat kuasa tanpa kord yang sesuai, menunjukkan kaedah operasi yang betul di tapak kerja dan memberi panduan kaedah penyelenggaraan alat kuasa tanpa kord Makita. Ketahui lebih lanjut tentang bagaimana alat kuasa tanpa kord dan teknologi terbaru Makita dapat memberi manfaat kepada organisasi anda, "hands-on" cuba alat kuasa tanpa kord Makita untuk mengalami Kuasa Tanpa Kord Extreme!

本公司拥有流动示范服务车，我们的专业技术员会亲身到访阁下的工作场地，向阁下介绍合适的充电式工具，现场示范正确的操作方法及指导关于 Makita 充电式工具的日常保养方法等。深入了解 Makita 最新的充电式工具和技术，试用Makita 的充电式工具，亲身体验 Extreme Cordless Power!



On site Demo Hotline

West Malaysia

HQ & Service Centre
总部和服务与展示中心
03-8023 0824

Johor (Johor Bahru) Service Centre
柔佛（新山）服务与展示中心
07-364 9406

East Malaysia

Sabah (Kota Kinabalu) Service Centre
沙巴（亚庇）服务与展示中心
088-388 278

Sarawak (Kuching) Service Centre
砂拉越（古晋）服务与展示中心
082-496 800

Roadshow and Demonstration

Join us at our roadshow for countless demonstrations on our latest tools and technologies. “Hands-on” to try Makita DC tools to experience the Extreme Cordless Power!

Sila kunjungi Roadshow kami untuk demonstrasi mengenai alat kuasa tanpa kord dan teknologi terkini, "hands-on" cuba alat kuasa tanpa kord Makita untuk mengalami Kuasa Tanpa Kord Extreme!

请到访我们的展销会，深入了解 Makita 最新的充电式工具和技术，试用 Makita 的充电式工具，亲身体验 Extreme Cordless Power!



Health and Safety Seminar

As a responsible professional power tool manufacturer, Makita always concerns about the health and safety issues of workers. Apart from developing products with specific safety features, we also organize workplace health and safety seminars for organisations.

Sebagai pengeluar alat kuasa profesional yang bertanggungjawab, Makita selalu mengambil berat tentang kesihatan dan keselamatan pekerja. Selain mengembangkan produk dengan ciri keselamatan khusus, kami juga mengadakan seminar untuk organisasi mengenai kesihatan dan keselamatan di tempat kerja.

Makita 作为一家负责任的专业电动工具生产商，一直都很关注工人的健康及安全。除了开发具有特定安全功能的产品，我们还为不同团体或公司举办有关工作场所健康与安全的讲座会。



12 MONTHS WARRANTY

Waranti 12 bulan • 12个月保修期

* Applicable on all Makita Tools, except heat gun (period of 6 months warranty)
* Untuk semua Makita Tool, kecuali Heat Gun (waranti 6 bulan) I *有效于所有 Makita 工具，热风机除外 (享有6个月保修)

Makita Standard Warranty

Piawaian Waranti Makita • Makita 保修服务说明

Every Makita Product is thoroughly inspected and tested before leaving the factory. Subject to the following terms and conditions, the Product (Tool, Battery, Charger) is warranty against defective materials and manufacturing defects for a period of **twelve (12) months from the date of purchase (applicable for purchases made from 1st October 2017 onwards)** as evidenced from the sale or tax invoice (with tool serial number) and Makita Authorised Service Centre or Makita Service Centre undertakes, at our option, to repair or replace, free of charge.

Conditions of warranty

This warranty will NOT cover or shall be null & void in any of the following events even during the warranty period:-

1. Damage resulting from normal wear and tear (Carbon brush/ holder/ cap, switch, gear, grinding/ cutting wheels, bits, saw blades, etc.,)
2. Damage resulting from use of improper accessories, non genuine replacement parts, disassembly, tampering, alteration and repairing in any way that affects its performance.
3. Damage resulting from negligence, accident, disaster, improper storage or maintenance, abuse and misuse in evident caused by overloading the tool beyond its capacity.
4. Abnormal voltage or the usage of generator, wrong usage not in accordance with the Operating Manual.
5. If the serial number on the tool, seal on the battery and charger has been defaced or removed.
6. If the receipt or invoice that display the date of purchase could not be present.

Setiap produk Makita diperiksa dan diuji dengan teliti dari kilang. Waranti produk (Alat, Bateri, Pengecas Bateri) tertakluk kepada terma dan syarat berikut, sekiranya terdapat kecacatan pada bahan atau kerosakan disebabkan pembuatan dari kilang dalam tempoh 12 bulan bermula dari tarikh pembelian (untuk pembelian bermula dari 1hb Oktober 2017), dengan bukti pembelian pada resit atau invois bercukai (dengan nombor siri alat), terikat kepada keputusan Pusat Servis diiktiraf oleh Makita atau Pusat Servis Makita untuk membaiki secara percuma.

Syarat-syarat waranti

Waranti ini TIDAK akan meliputi atau akan dibatalkan & tidak sah sekiranya berlaku salah satu kejadian yang berikut semasa berada dalam tempoh waranti:-

1. Kerosakan akibat daripada haus dan lusuh biasa (karbon/ pemegang/ tukup, suis, gear, cakera mencanai/ memotong, mata gerudi, bilah gergaji, dll.,)
2. Kerosakan akibat daripada penggunaan aksesori yang tidak sesuai, alat ganti yang tidak asli, pembukaan, perbuatan merosakkan, pengubahan dan pembaikan yang mempengaruhi prestasinya.
3. Kerosakan akibat kecuaian, kemalangan, bencana, penyimpanan atau penyelenggaraan yang tidak wajar, penyalahgunaan yang jelas disebabkan oleh beban yang melebihi kemampuannya.
4. Voltan tidak normal atau penggunaan penjana, cara penggunaan yang salah dan tidak mengikuti Manual Operasi.
5. Jika nombor siri pada alat, balut/ cap pada bateri dan pengecas tercacat atau ditanggalkan.
6. Jika resit atau invois yang memaparkan tarikh pembelian tidak dapat ditunjukkan.

每个 Makita 产品生产制造都经过彻底检查和测试并严格把关确认品质。根据以下保修条件，产品保修(工具，电池，充电器)涵盖材质和生产上的瑕疵，于销售单据 (附上工具生产编号) 与税收发票上所显示的购买日期起十二(12)个月内 (从1-10-2017选购开始)，以 **Makita** 授权服务中心或 **Makita** 服务中心的判断为准而提供无收费维修。

保修规定

Makita 均不承担基于以下违反保修行为而造成的产品故障、工作异常或损坏的责任。

1. 正常消耗零件。(例如：碳刷/支架/盖，开关，齿轮，研磨/切割片，钻头，锯片等)。
2. 使用不正确的配件，更换非原装零件，拆除和改造等任何影响其性能而引起的损坏。
3. 因人为疏忽，意外，灾难，不正确的保管或保养，滥用和误用，超出工具负荷能力等原因导致的损坏。
4. 使用非工具所规定电压和发电机，未按说明书安装及使用工具。
5. 工具上的编号，电池和充电器上的印章已被污损或除去。
6. 无法提供销售单据或税收发票。

** Makita reserved the rights of amend conditions of warranty without prior notice. In the event of differences arising between the English, Bahasa Malaysia and Chinese versions, the English version shall prevail.
Makita berhak untuk meminda syarat-syarat waranti pada bila-bila masa tanpa sebarang notis. Jika terdapat perbezaan antara bahasa, maka maklumat versi Bahasa Inggeris harus digunapakai.
Makita 保留修改保修规定的權利，恕不另行通知。如果内容有任何差异或不一致，概以英文版本为准。

Please visit our website for contact of nearest

AUTHORISED SERVICE CENTRE

www.makita.my/Customer-Services/

Sila layari laman web kami untuk maklumat Pusat Servis Diiktiraf
请游览我们的网页以获取授权服务中心的详细信息

MAKITA SERVICE CENTRE
SERVIS & BAIK-PULIH 售后服务及维修
www.makita.my/makita-service-centre/

PRODUCT RANGE
SIRI PRODUK 产品系列
www.makita.my/cordless-tools-batteries/

ACCESSORIES
AKSESORI 配件
www.makita.my/accessories/

ABOUT US
MENGENAI KAMI 公司简介
www.makita.my/makita-malaysia/

LATEST INFO & PROMOTION
INFO & PROMOSI TERKINI 最新信息和促销
www.makita.my/news-events/

E-CATALOGUE
KATALOG PRODUK 商品目录
https://www.makita.my/catalogue/



The "Go Green" slogan symbolizes Makita's commitment to continually providing new value as a comprehensive international supplier of tools. We hope to always remain a company that maintains a steady eye on society, challenging ourselves to create a "sustainable recycling-oriented society" that combines the environment with the economy.

Go Green

XGT LXT CXT

RoHS REACH

Like us on Facebook
MAKITA MALAYSIA

12 MONTHS WARRANTY
Waranti 12 bulan · 12 个月保修期

Makita Power Tools (Malaysia) Sdn. Bhd. Co. Registration No.: 201301001778 (1031615-M)

HQ & Service Centre
总部和服务与展示中心
Lot 824, Jalan Subang 5, Subang Industrial Area,
47500 Subang Jaya, Selangor.
Tel: 03-8023 0824 (General) I Fax: 03-8022 1448
03-8022 1443 (Service)

Johor (Johor Bahru) Service Centre
柔佛(新山)服务与展示中心
No.12 & 14, Jalan Rosmerah 2/9,
Taman Johor Jaya,
81100 Johor Bahru, Johor.
Tel: 07-364 9406 I Fax: 07-364 9407

Sarawak (Kuching) Service Centre
砂拉越(古晋)服务与展示中心
Lot 1227, Lorong Demak Indah 2A,
Demak Laut Industrial Area, Phase 2A,
93050 Kuching, Sarawak.
Tel: 082-496 800 I Fax: 082-496 900

Sabah (Kota Kinabalu) Service Centre
沙巴(亚庇)服务与展示中心
Lot 19, Jalan Buah Duku,
Kolombong Light Industrial Estate, Off Kolombong,
Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.
Tel: 088-388 278 I Fax: 088-388 279

www.makita.my
makita@makita.my

PRINTED IN MALAYSIA 2022/A3.5